

# MOTOR-POWERED CABLE REELS





## APPLICATION EXAMPLE: SHIP-TO-SHORE (STS) CRANES



# MOTOR-POWERED CABLE REELS

## Contents

Motor-powered cable reels .....	3
General .....	4
Calculations .....	5
Reel installation example .....	6
Determining the cable cross section .....	7
Type designation .....	8
Cable guides .....	9
Sheave guides .....	10

## Application

Cable reels with motor drives are used as a power supply for mobile consumers for automated winding of flexible power or control cables for the following areas:

- All forms of portal and swivel cranes
- Container bridges
- Stacking cranes
- Gantry cranes
- Construction cranes
- Loading facilities
- Magnet and grip cranes
- E-trains
- Transfer tables
- Forklifts
- Warehouses in sewage treatment plants
- Coating machines

Our cable reels comply with VDE and UVV standards.

## Special uses

- Reels for installation on maritime ships or use in the tropics
- Reels used under aggressive operating conditions (e.g. acid baths, galvanizing plants)
- Reels for the distribution of measured current, signal current and high frequency transmissions
- Reels for the transfer of optical signals (optical fiber)
- Reels for feeding liquid or gaseous media (hose reels)
- Reels for height variable tools or control boards on lifting equipment

Deflection and guiding rollers .....	11
Feed point funnel .....	12
Terminal box .....	13
Cable grips .....	14
Cable support rollers .....	15
Anchor shackles .....	15
Installation layout .....	16
Questionnaire .....	17
Referenses .....	18-19

## Slip ring bodies

VAHLE slip ring bodies are available in the following versions:

- **Low voltage:** Voltages ranging between 230 V and 500 V  
Amperages of 10 A to 1000 A
- **Medium voltage:** Voltages ranging between 10 kV and 20 kV  
Amperage of 240 A

Higher voltages available upon request. The housing for the slip ring bodies are encapsulated to meet protection type IP 55 (higher protection types available upon request).

All slip ring bodies may be equipped with stand heaters (standard for medium voltages) upon request. The installation of a heater is recommended for temperatures below  $-25^{\circ}\text{C}$  or where large temperature fluctuations are expected within a short period of time.

Special slip ring bodies for profibus data transfer with 1.5 Mbit/s are also available.

Fiber optic cables are used for the transmission of all optic signals. The transmission between the rotating part (reel body) and the fixed part will then be performed using the fiber optic transmitter. This is adjusted to the length of the cable as well as the number of fiber optic cables.

A plug connector is used. The transmitter shall either be attached to the slip ring body or is located in a housing, both in a heated room.



## GENERAL

### Drives

We offer the following drives:

- Three-phase motor with magnetic coupling
- Three-phase motor with frequency converter
  - with constant torque
  - with adjustable torque
- Three-phase motor with integrated frequency converter
  - with constant torque
  - with adjustable torque
- Torque motor with/without external ventilator

All drives run in winding direction. The payout involves the pulling of the cable from the reel counter to the drive torque. The drive is suitable for all device speeds up to a standstill. A brake stops the uncontrolled unwinding of the cable when the device is switched off. The drive can be electrically heated upon request.

### Reel bodies

- Mono spiral winding bodies with spokes are available in welded and bolted versions. The bolted design can be set to the winding width and thus adjusted to different cable cross sections. The winding cross section is adjusted to the minimum bend radius for the cable.
- Cylindrical (random) winding reel bodies are made of galvanized steel.

Also available:

- Double spiral winding reel bodies for the parallel winding of two cables with the same cross section
- 3-2-3 layered winding
- Cylindrical winding with spooling equipment

### Payout

The cable payout is as presented in the dimensional drawings. Payout direction changes can be made upon request without additional charges and at a later time with no great effort.

### Limit switch

In order to switch off the drive or hoist motors when unwinding the last or next-to-last cable winding, all reels come with an optional limit switch. The switching cams are set for a maximum of 5 A and 250 V. The limit switch is located either in the slip ring body housing or externally in its own housing (with a Nirosta chain as a drive). Alternatively other limit switches, proximity switches or feeds can be installed.

### Surface protection

The reel body comes standard in a galvanized version. The slip ring body housing and the drive unit have a primer and cover coating in RAL 7040. Other versions (e.g. hot-dip galvanized or stainless steel reel bodies) are available.

### Operating manual

Instructions for assembly and commissioning are included in every delivery.

### Assembly

When attaching the motor-powered cable reel to the consumer, make sure that the assembly frames or the foot-mounted gears have a level surface. In order to guarantee the smooth winding up and down the reel needs to be aligned on two sides, i.e. the reel axis needs to be horizontal and perpendicular to the running direction.

The heat emission from the motor drive needs to flow upwards and may not be hindered by protective hoods or other devices. The cables need to be free from twisting – while accounting for the safety winding(s) for the strain relief – on the reel body. Expert staff shall install the electrical connections to the slip rings and the feed points in compliance with regulations.

After successful connection of the drive motor, the reel is ready for operation. The drive motor needs to be connected so that the reel rotates in the wind up direction. The payout direction is marked with an arrow.

### Accident prevention measures

In accordance with EC directive 2006/42/EC, we wish to indicate that rotating parts such as reels need to be secured to prevent potential accidents.

### Warranty

We provide guarantees in compliance with the general terms and conditions for products and services of the electrical industry.

### Accessories (starting from page 9)

- Guide rollers with and without tension control
- Sheave guides with and without top guide rollers
- Deflection and guide rollers
- Feed point
- Medium voltage terminal box  
(special versions available, e.g. with fiber optic cable)

## CALCULATIONS

### Calculating the necessary cable cross section

1. Determination of ampacity and cable cross section
2. Control of voltage drop
3. Selection of cables

#### 1. Determination of ampacity and cable cross section

The nominal current ( $I_N$ ) of the individual motors are summarized with a reduction factor ( $f_{ED}, f_T, f_1, f_2$ ) to an equivalent continuous current ( $I_D$ ). The following calculation shall also be performed repeatedly if necessary.

$$I_D = \frac{I_N}{f_{ED} \cdot f_T \cdot f_1 \cdot f_2} \quad [A]$$

#### $I_N$ : Recommendations for determining the nominal current

Estimated example for crane installations: Sum up of the nominal currents for two motors with the strongest output.

$$I_N = I_{N1} + I_{N2} + I_G \quad [A]$$

If only one power output is known:

$$I_D = \frac{P \cdot 1000}{\sqrt{3} \cdot U \cdot (\cos \varphi) \cdot f_G} \cdot f_G \quad [A]$$

#### 2. Check of voltage drop

Rough calculation for determining the voltage drop  $\Delta U$ :

$$\Delta U = \sqrt{3} \cdot L \cdot I_A \left( \frac{Z}{1000} \right) [V]$$

#### Legend to formula

- P** = Power [kW]  
**U** = Voltage [V]  
**L** = Total cable length [m]  
**Z** = Effective impedance [ $\Omega$ /km]  
 **$\Delta U$**  = Recommended  $\Delta U < 3\%$   
 **$\cos \varphi$**  = 0.6 from table 1 (page 7)  
 **$\cos \varphi \cdot \eta$**  = 0.8 estimated  
 **$f_G$**  = 1.0 when individual power rating is known  
 **$f_G$**  = 0.9 only total power is known  
 **$f_{ED}$**  = Reduction factors for intermittent service (page 7)

#### $I_A$ : Calculation of start-up current

The order of the motors size does not depend on their power output but on the level of start-up current i.e.: squirrel cage motor with less power output but high start-up current is placed ahead of a slip ring motor with higher performance.

Recommendation:

$$I_A = I_{A1} + I_{N2} \quad [A]$$

$I_{A1}$ : 1. motor with highest start-up current

$I_{N2}$ : 2. motor with highest nominal cur-

Note:

$$I_A = X + I_N \quad [A]$$

Squirrel cage motors:  $X \approx 6$   
 Slip ring motors:  $X \approx 2$   
 Frequency regulated drives:  $X \approx 1.1$

#### 3. Selection of cables

Reel-capable cables in accordance with DIN/VDE 0298 shall be used. In doing so the smallest permissible bending radius (page 8) needs to be taken into account.

For reasons of mechanical strength, the diameter of control cables should not be less than 1.5mm<sup>2</sup>. We recommend to include spare conductors for multi-core control cables.

$f_T$  = Reduction factor for increased ambient temperature. For ambient temperatures above 30°C, the reduction factors on page 7 shall apply.

$f_1$  = Reduction factor for multi-layer winding for ampacities based on the type of reel as per page 7. They are valid for permanently wound up cables. For cables that are only temporarily fully wound, reduced factors can be applied.

$f_2$  = Reduction factor for multilayer coiling. The factors on page 7 should be taken into account for multilayer cables.

They apply for diameters of up to 10 mm<sup>2</sup>



$I_A$  = Starting current [A]

## REEL INSTALLATION EXAMPLES

### Reel on moving equipment (1, 2)



Cable tray on the ground or on a continuous tray.

Cable payout horizontally in one or two directions

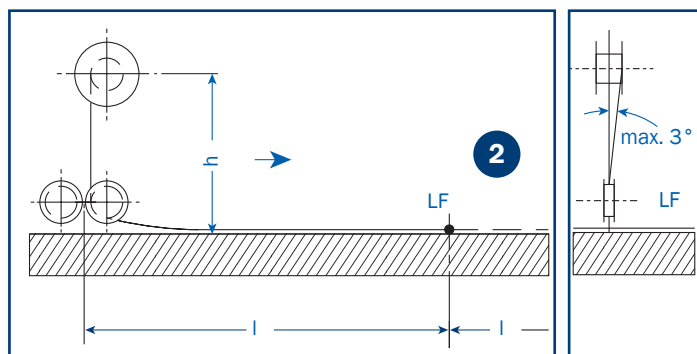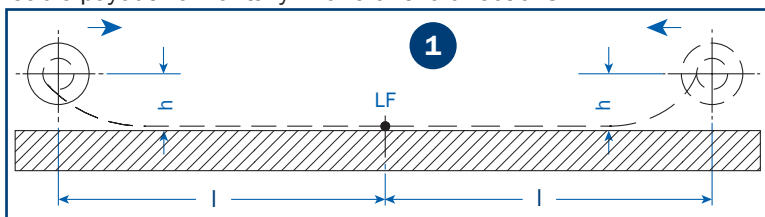


### Reel on moving equipment (3, 4)

Cable storage on supports ( $l_1 = 1$  m), or on rolls or round smooth supports ( $l_1 = 1$  to 3 m). Horizontal cable payout in one or two directions

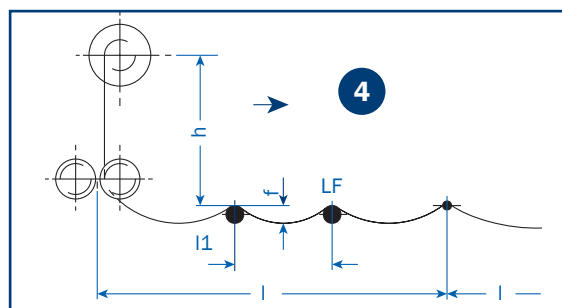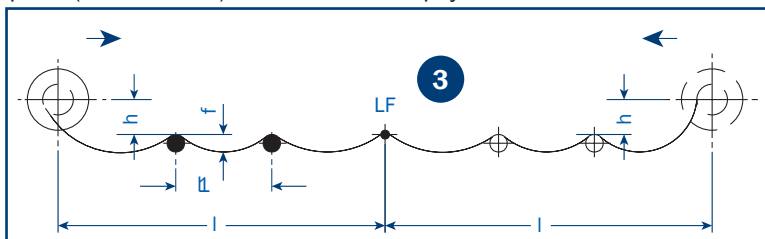



### Reel stationary (5)

(Cable fixpoint at moving equipment), horizontal cable payout in one or two directions on rolls or smooth supports ( $l_1 = 3$  m)

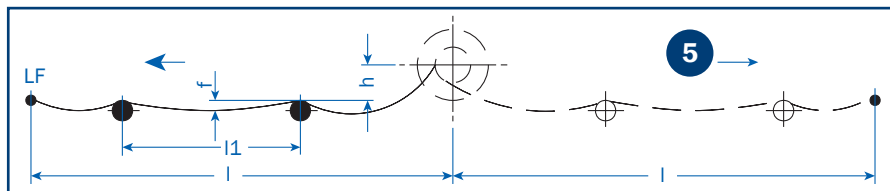

### Reel on moving equipment (6) or stationary (7). Cable fix point at moving equipment.

Free horizontal cable payout in one or two directions. For payout in one travel direction: „f“ is determining the loop depth if the suspended cable length „L“ is larger than „I“.

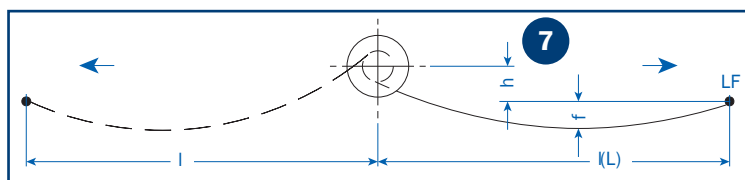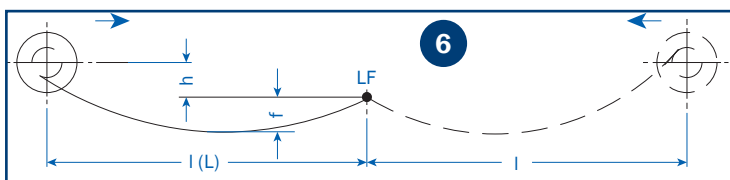

### Legend to drawings (examples 1–7)

- $I$  = max. operational length of cable (m)  
(with cable payout in two travel directions = half travel length)
- $L$  = max. operational length [m] between reel and cable fixpoint
- $h$  = Installation height = distance from cable tray or cable fixpoint to reel center [m]
- LF = Cable fixpoint
- $f$  = max. cable loop depth [m], relating to cable fixpoint „LF“
- $l_1$  = Rolls or support distance [m]



### Legend to drawings (examples 8 and 9)

- $I$  = operational length of cable
- $L$  = max. sloping cable length (m).  
Also consider additional weight  
(e.g. control switch)
- LF = Cable fixpoint

### Lifting operation (8, 9)

Cable payout vertical or steeply sloping (8)

Cable payout vertical or steeply rising (9)

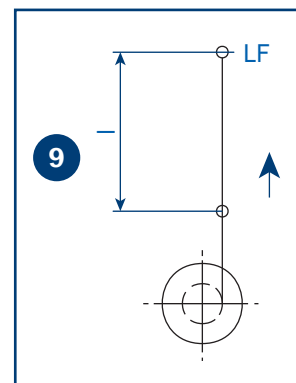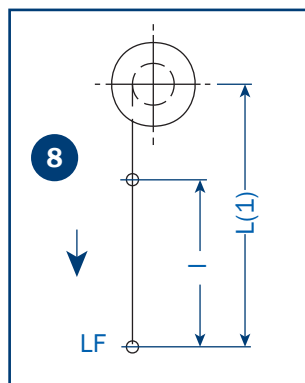

### Note

For applications 2, 4, 5 and reels beyond the listed capacities please fill out the questionnaire on page 21 and consult your local agent or our factory.

## DETERMINING THE CABLE CROSS SECTION

**Table 1: Continuous ampacity of cables NSH ... and NTS ... for straight, open air installation. Max. possible operating temperature of the conductor is 90 °C.**

Nominal cross section [mm <sup>2</sup> ]	Continuous current <sup>(1)</sup> [A]	Factors for intermittent duty with ED				Z [Ω/km]
		60 %	40 %	25 %	15 %	
1.5	23	1.00	1.00	1.00	1.00	8.770
2.5	30	1.00	1.00	1.04	1.07	5.310
4	41	1.00	1.03	1.05	1.19	3.360
6	53	1.00	1.04	1.13	1.27	2.250
10	74	1.03	1.09	1.21	1.44	1.370
16	99	1.07	1.16	1.34	1.62	0.888
25	131	1.10	1.23	1.46	1.79	0.547
35	162	1.13	1.28	1.53	1.90	0.443
50	202	1.16	1.34	1.62	2.03	0.344
70	250	1.18	1.38	1.69	2.13	0.258
95	301	1.20	1.42	1.74	2.21	0.205
120	352	1.21	1.44	1.78	2.26	0.174
150	404	1.22	1.46	1.81	2.30	0.154
185	461	1.23	1.48	1.82	2.32	0.136
240	540	1.23	1.49	1.85	2.36	0.119

**Table 2: Multiplier for ambient temperature**

Ambient temperature [°C]	Reduction factor, $f_t$
25	1.05
30	1.00
35	0.95
40	0.89
45	0.84
50	0.77
55	0.71
60	0.63
65	0.55
70	0.45

**Table 3: Multiplier for multilayer coiling**


Number of complete layers LZ on the reel	1 <sup>(2)</sup>	2	3	4
Reduction factor $f_1$	0.80	0.61	0.49	0.42

**Table 4: Multiplier for multilayer coiling up to 10 mm<sup>2</sup>**

Number of conductors	5	7	10	14	19	24	40	61
Reduction factor $f_2$	0.75	0.65	0.55	0.50	0.45	0.40	0.35	0.30

**Table 5: Minimum bending radius**

Cable type	Nominal voltages up to 0.6/1 kV			Nominal voltage over 0.6/1 kV
Flexible cables	Cross section of cables or thickness of the flat cables			
	over 8 to 12	over 12 to 20	over 20	
Fixed installation	3 x d	4 x d	4 x d	6 x d
Free movement	4 x d	5 x d	5 x d	10 x d
For entry	4 x d	5 x d	5 x d	10 x d
For positive guidance <sup>(3)</sup>	5 x d	5 x d	6 x d	12 x d
Guide roller	7.5 x d	7.5 x d	7.5 x d	15 x d

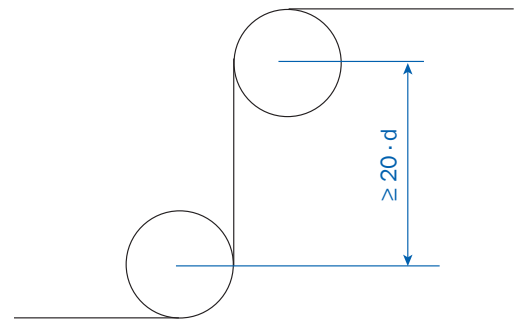

- The smallest permissible bending radius is 6 x d for PUR-HF cables 0.6/1 kV with positive guidance like reel operation.
- The straight lengths between two bends with an S-shaped cable guide or cable guide to another level must be at least 20 times the cable diameter.
- If cable types can be used for several applications contact the manufacturer.<sup>(4)</sup>
- Subject to technical advancement.

(1) Continuous current in amperes at ambient temperature 30 °C

(2) Also applies to spiral coils

(3) with reeling operation

(4) The suitability for this operating mode needs to be assured through special structural characteristics.

## TYPE DESIGNATION

### Motorized cable reels with magnetic coupling drive

LTM	300	S	7	M	36 - R1	/ 1.8
LTM	530	N	4	M	60 - 95	/ 5
LTM	15/40H		4	K	240-128	/ 88

Cable reels with magnetic coupling drive

Random winding (inner diameter of the reel in millimetres)

Spiral winding (inner diameter/exterior diameter in decimetres)

S = Low voltage with vertical payout

N = Low voltage with horizontal payout

H = Medium voltage

Number of poles for slip ring body

M = Brass slip ring

K = Copper slip ring

Slip ring rating in amps (100 % Duty Cycle)

Gear sizes: Bevel - helical gear unit 1 = R1

Flat spur gear = 95 + 96

Bevel - helical gear unit = 48 - 168

Magnetic coupling sizes

### Motorized cable reels with frequency converter drive

LT	420	S	24	M	36 - 68	/ FMK	4	G
LT	530	N	4	M	60 - 88	/ FK	4	J
LT	15/40	H	4	K	240-128/	FP	6	M-S

Cable reels with frequency converter drive

Random winding (inner diameter of the reel in millimetres)

Spiral winding (inner diameter/exterior diameter in decimetres)

S = Low voltage with vertical payout

N = Low voltage with horizontal payout

H = Medium voltage

Number of poles for slip ring body

M = Brass slip ring

K = Copper slip ring

Slip ring rating in ampere (100 % Duty Cycle)

Gear sizes

FMK = Frequency converter with constant torque<sup>(1)</sup>

FMP = Frequency converter with variable torque<sup>(1)</sup>

FK = Frequency converter with constant torque

FP = Frequency converter with variable torque

Number of poles of the motor

Motor size

S = Frequency converter from Siemens Sinamics

No label = from Getriebebau Nord

(1) installed directly to the motor (always from Getriebebau Nord)



## CABLE GUIDES

### Guide roller assemblies


for mono-spiral wrap

For voltages up to 1000 volt

and payout in two directions


For voltages exceeding 1000 volt:

$r \text{ min.} = 15 \times \text{cable cross section}$

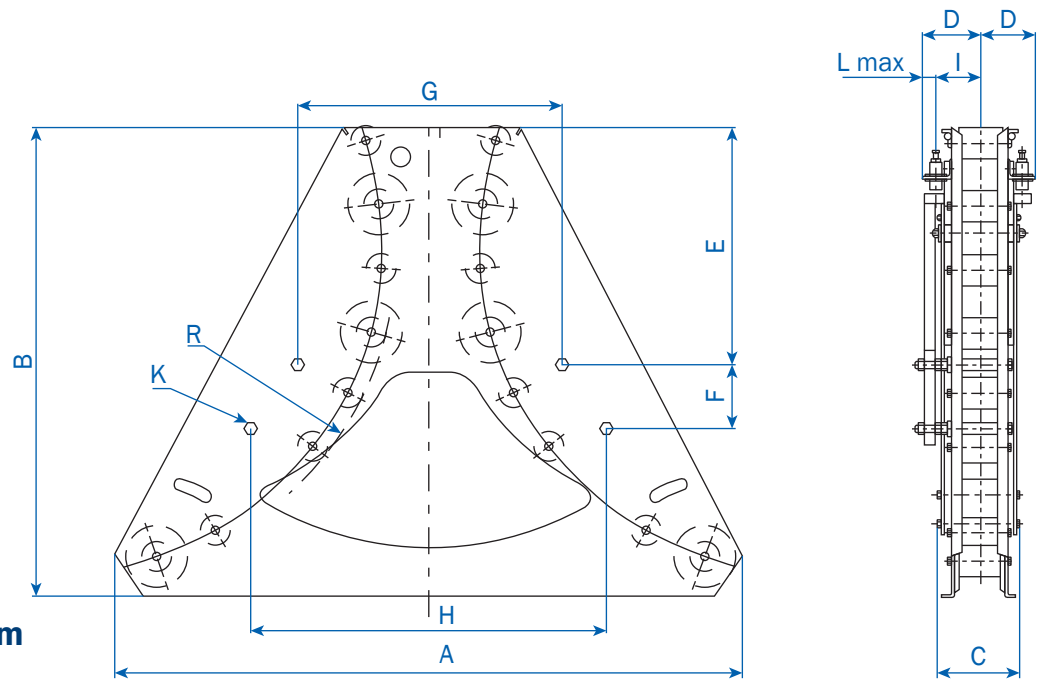

### Guide roller without pendulum

Type	≈kg	A	B	C	D	E	F	G	H	K	R	max. LTG Ø	Order No.
R 6	85	1140	860	145	95	360	125	430	598	M 16	600	55	924994
R 9	150	1595	1200	180	130	606	164	670	900	M 20	900	75	924995
R 12	250	2100	1660	210	130	560	500	740	1200	M 20	1200	83	924996

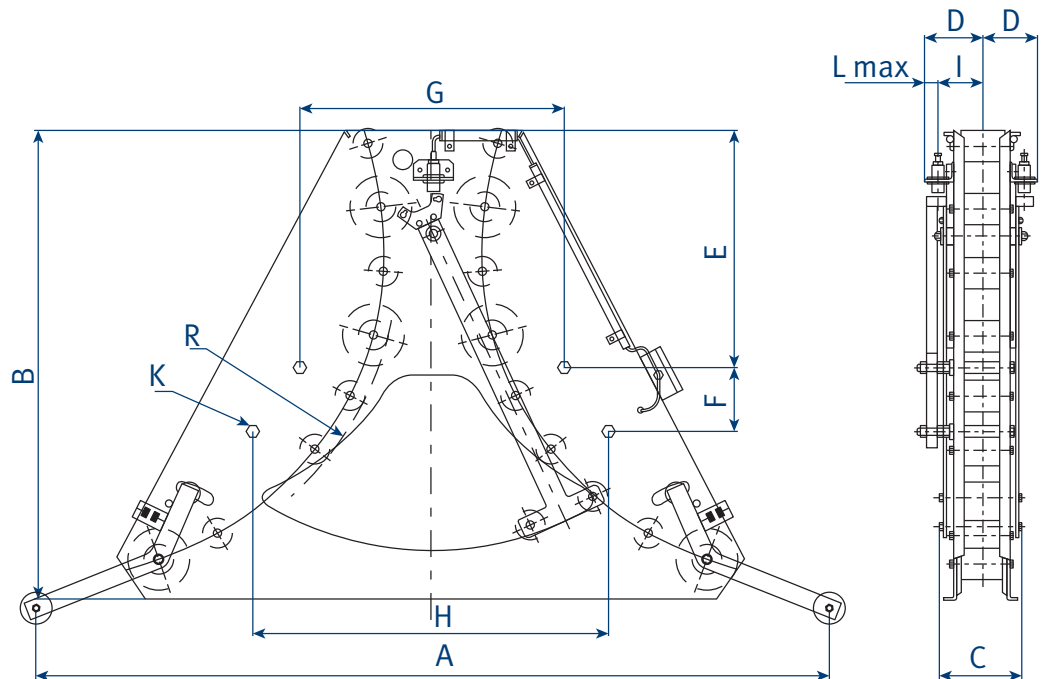


### Guide roller with tension control

Type	≈kg	A	B	C	D	E	F	G	H	I	K	R	max. LTG Ø	Order No. with position switch	Order No. without position switch
RZ 6	95	1700	930	185	123	360	125	430	598	92.5	M 16	600	55	926576	924742
RZ 9	160	2175	1240	220	140	606	164	670	900	111	M 20	900		925073	925002
RZ 12		2600	1710	220	140	560	500	740	1200	111	M 20	1200		926573	925003

1) For voltages exceeding 1000 V


## SHEAVE GUIDE

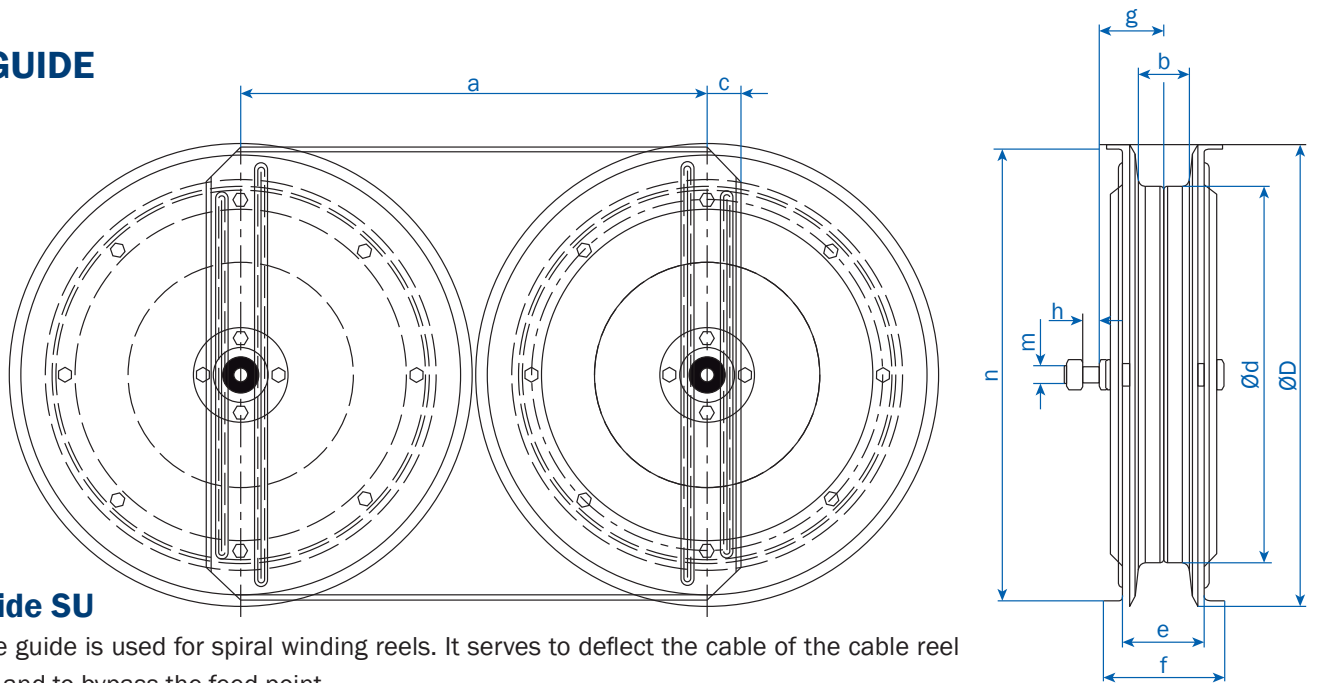

### Sheave guide SU

The SU sheave guide is used for spiral winding reels. It serves to deflect the cable of the cable reel located above and to bypass the feed point.

Type	Weight kg	a	b	c	Ø d	Ø D	e	f	g	h	m	n	o	p	max. LTG Ø	Order No.
SU 1	48	455	70	32.5	350	450	114	170	85	50	M 24	445	180	315	22	901635
SU 2	76	655	70	47.5	503	650	114	170	85	50	M 24	640	180	400	32	901636
SU 3	90	785	70	80	663	780	114	170	85	50	M 24	770	180	500	39	901637
SU 4	120	905	75	80	783	900	114	170	85	50	M 24	890	180	600	50	901638

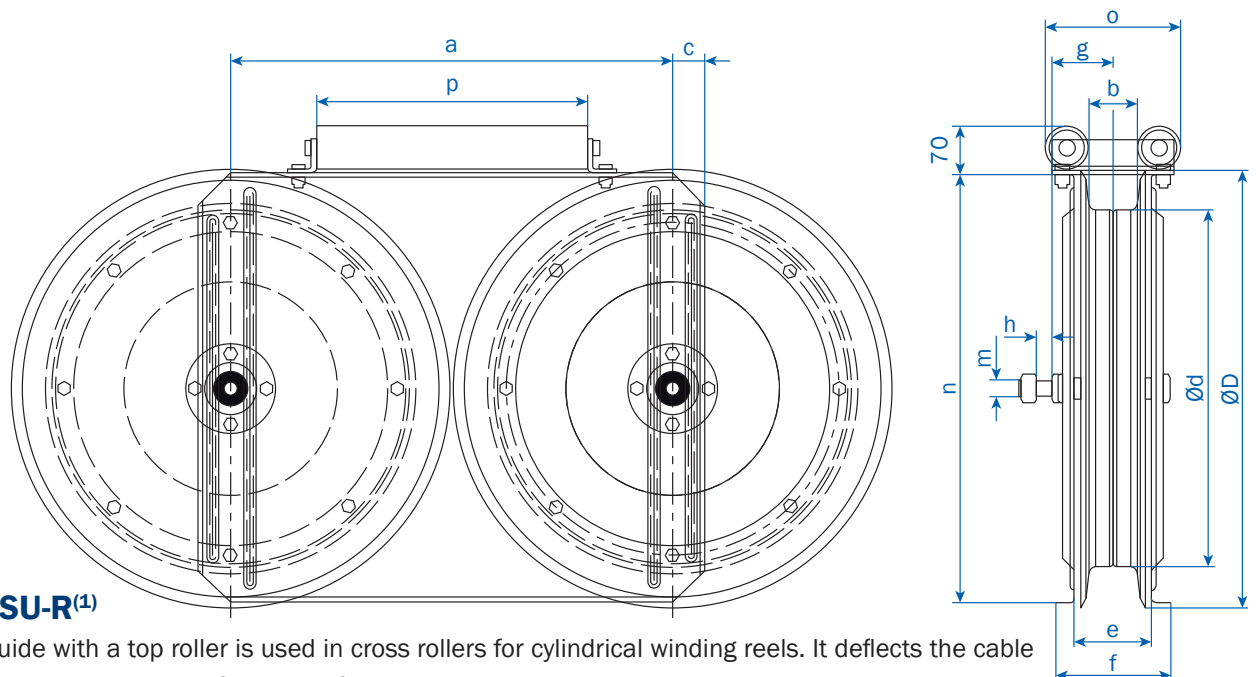

### Sheave guide SU-R<sup>(1)</sup>


The SU-R sheave guide with a top roller is used in cross rollers for cylindrical winding reels. It deflects the cable from the reel above and bypasses the feed-point funnel.

Type	Weight kg	a	b	c	Ø d	Ø D	e	f	g	h	m	n	o	p	max. LTG Ø	Order No.
SU-R 1	53	455	70	32.5	350	450	114	170	85	50	M 24	445	180	315	22	901630
SU-R 2	84	655	70	47.5	503	650	114	170	85	50	M 24	640	180	400	32	901631
SU-R 3	105	785	70	80	663	780	114	170	85	50	M 24	770	180	500	39	901632
SU-R 4	140	905	75	80	783	900	114	170	85	50	M 24	890	180	600	50	901633

(1) Ensure the drum is installed at a height that allows a maximum diagonal pull of 3° for smooth cable winding.


## DEFLECTION AND GUIDING ROLLERS

Deflection and guide rollers are used if the cable payout cannot be made directly from the reel. The roller cross section needs to be at least 15 times the cable cross section.

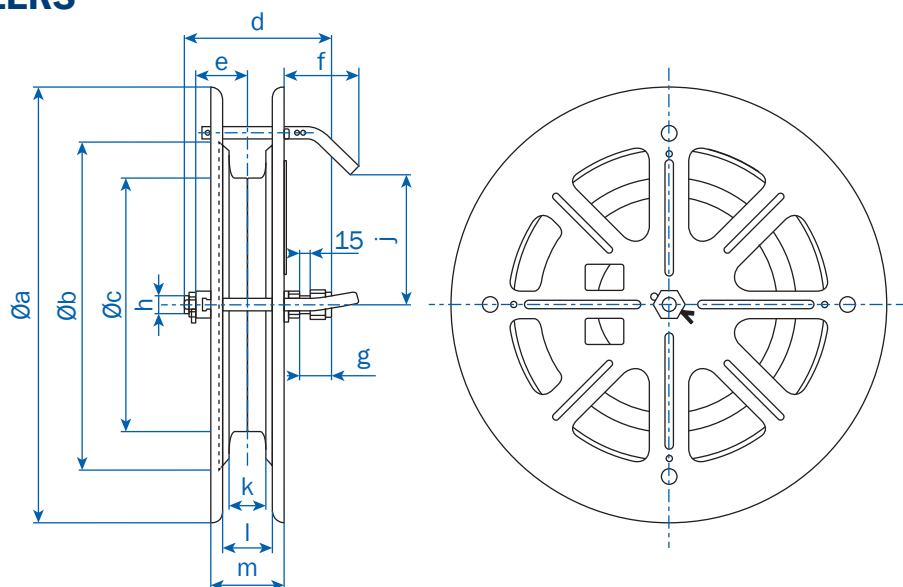

### URN series

Type	Weight kg	Øa	Øb	Øc	d	e	f	g	h	j	k	l	m	Order No.
VURN 350	23	600	450	350	195	60	99	42	M 20	180	50	58	98	970421
VURN 500	42	800	650	530	240	84	85	57	M30	280	50	82	112	970422
VURN 660	52	900	780	660	240	86	75	55	M30	344	70	90	120	970423

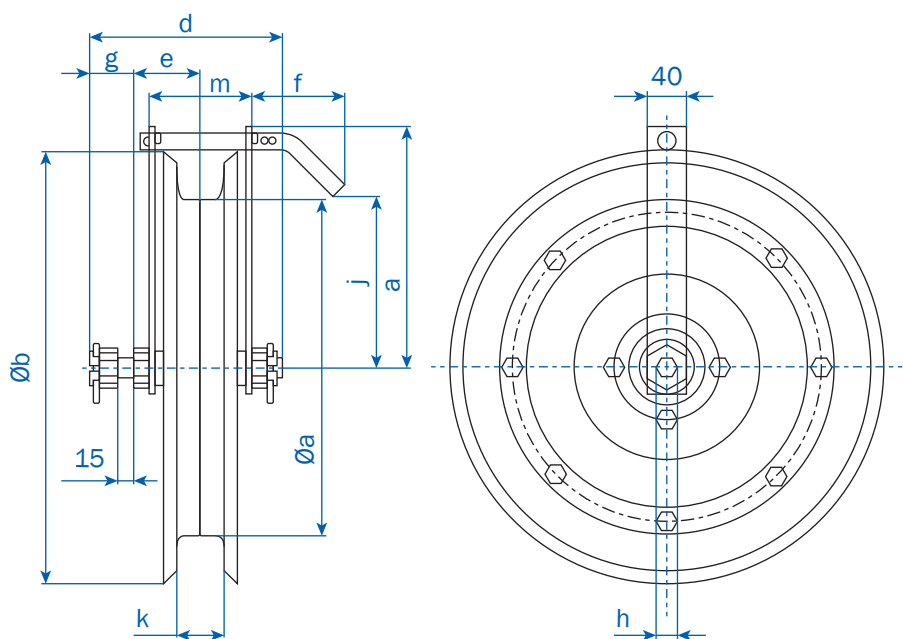


### LRN series

Type	Weight kg	Øa	Øb	Øc	d	e	f	g	h	j	k	l	m	Order No.
LRN 350	16	253	450	350	183	70	97	45	M 24	180	45	-	105	970424
LRN 500	24	360	650	530	240	82	88	59	M 30	280	50	-	116	970425

## FEED POINT FUNNEL

For voltages up to 1000 volt and cable payout in two directions for medium travel speed and frequent traveling of midpoint.

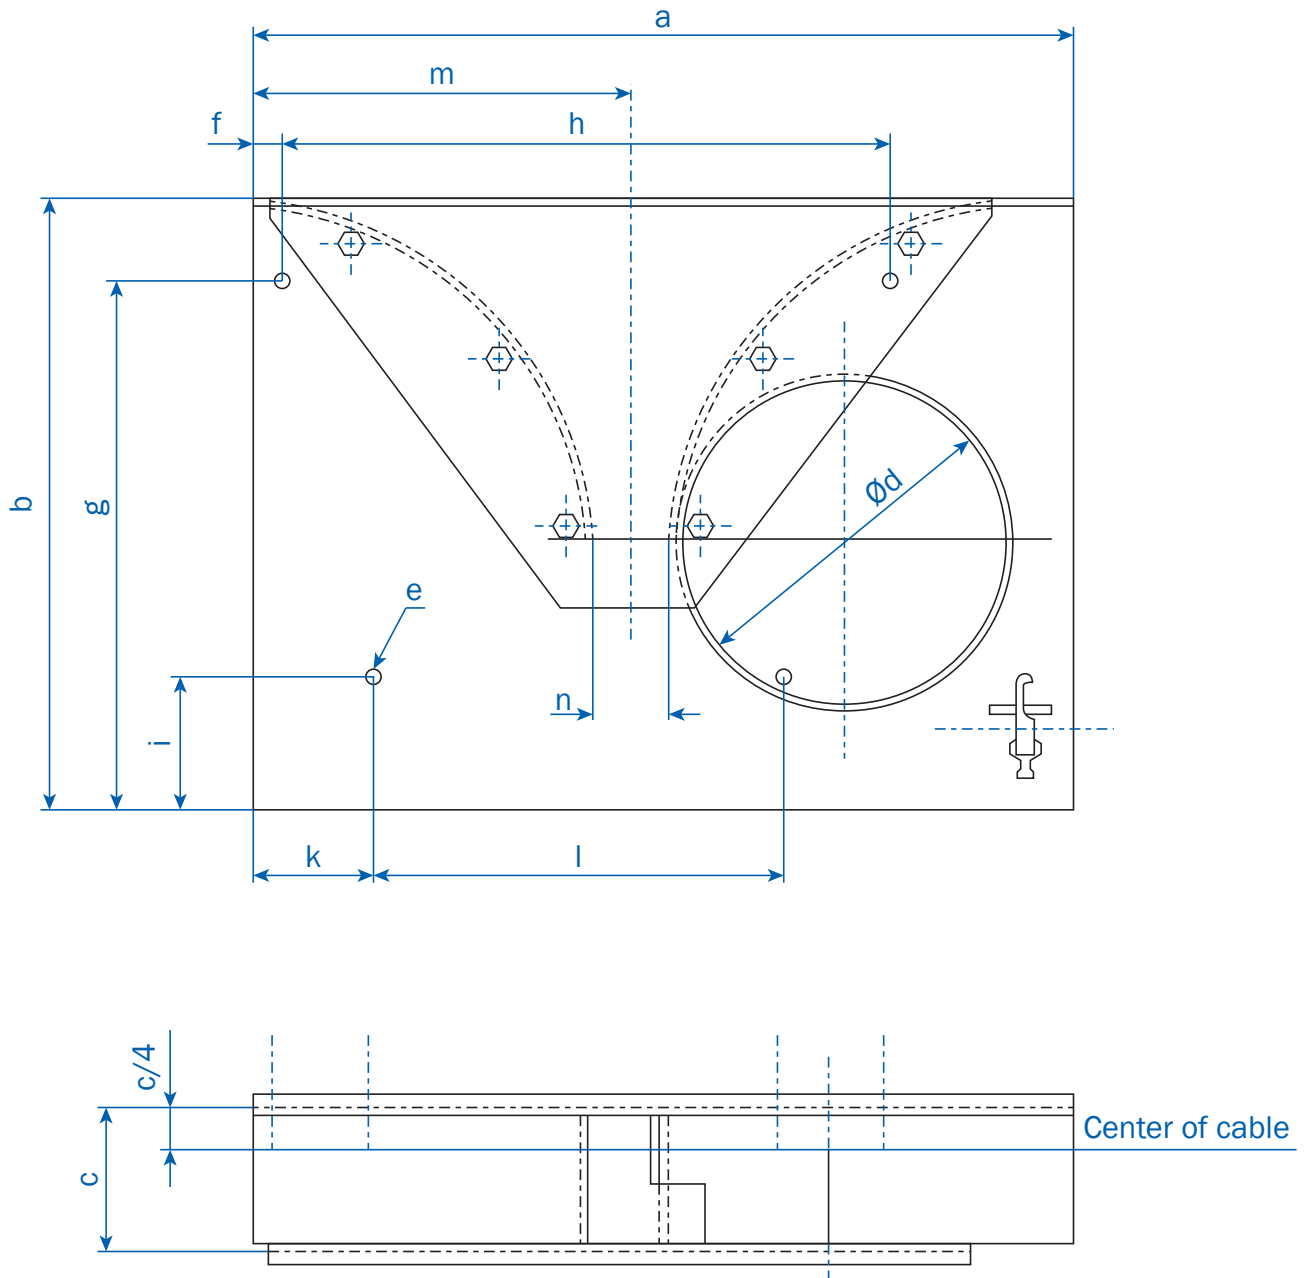

Type	Weight kg	a	b	c	d/r	e	f	g	h	i	k	l	m	n	max. LTG.Ø	Order No.
ETZ 3	15	650	530	106	275	14	40	405	400	220	120	300	270	60	34	921380
ETZ 4	28	900	700	146		18	40	550	740	220	210	400	410	80	50	921390
ETZ 5	52	1220	900	208		18	40	780	900	220	180	600	480	100	62	921400
ETZ 7	100	1760	1200	208		18	200	1080	1100	220	350	800	750	100	80	921410
ETZ 9	130	2070	1475	216		22	125	1325	1820	275	1250	695	960	120	90	921720
															~70 <sup>(1)</sup>	

1) for voltages exceeding 1000 V




## TERMINAL BOX

### Terminal box 10 kV

Protection type IP 54

Stainless steel housing

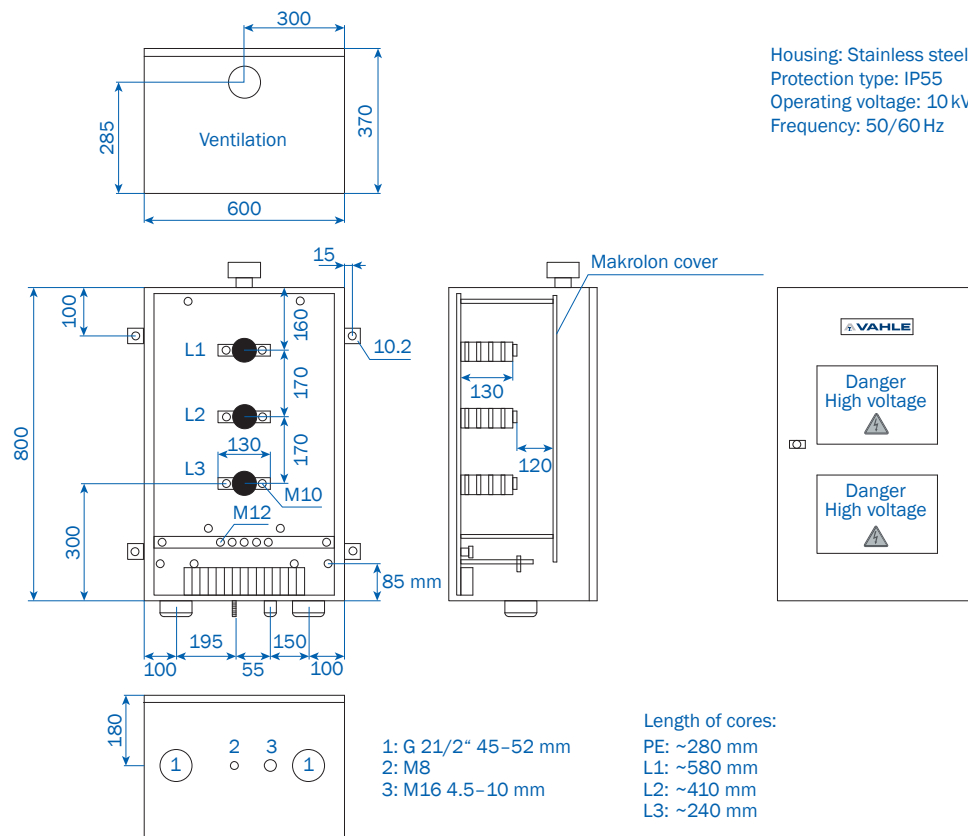


Type	Weight kg	Order No.
KKU-10K-XXXX-UU-E-0000-P55-G683-0755320	50	970579

### Terminal box 20 kV

Protection type IP 54

Stainless steel housing

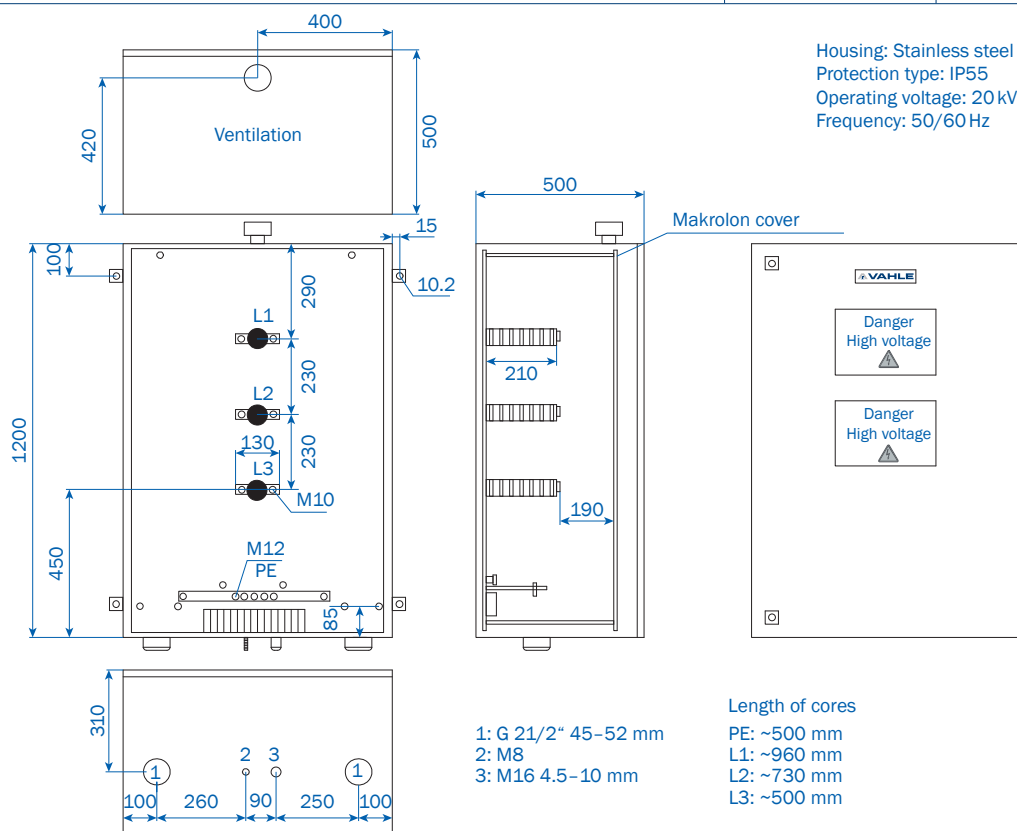


Type	Weight kg	Order No.
KKU-20K-XXXX-UU-E-0000-P55-G8X3-0755330	75	970580

## CABLE GRIPS

with 2 grommets, open on the eye side, sleeve end without soldering point




Type	Maximum permitted strain kg	for Cable cross section	Order No.
VLZ 1	930	15-20	901620
VLZ 2	1165	20-30	901621
VLZ 3	1400	30-40	901622
VLZ 4	1630	40-50	901923

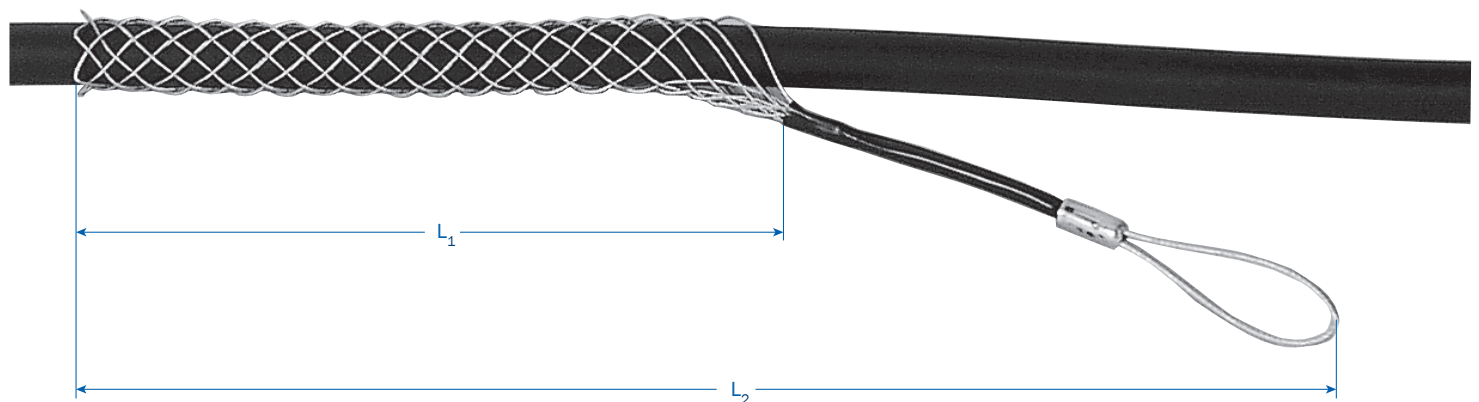

Type	Max. permitted strain <sup>(1)</sup> kg	For cable cross section	Length of wire mesh measure $L_2$	Mesh length dimension $L_1$	Order No.
VLZK 6	60	4 to 7	100	275	900391
VLZK 9	110	7 to 9	120	290	900392
VLZK 12	130	9 to 12	135	340	900393
VLZK 15	210	12 to 15	180	390	900394
VLZK 20	260	15 to 20	220	450	900395
VLZK 25	260	20 to 25	275	510	900396
VLZK 30	400	25 to 30	350	610	900397
VLZK 40	580	30 to 40	370	660	900398

1) Calculated for triple security

## CABLE SUPPORT ROLLERS

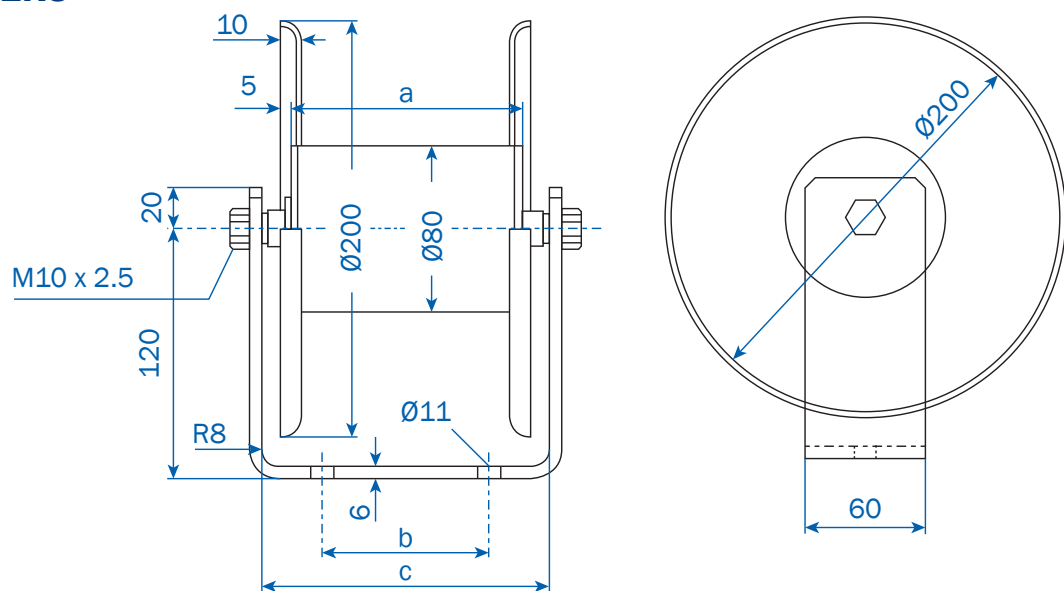


Type	Weight kg	Support	a	b	c	Order No.
TR 80/110 B 200	2.25	without support	110	-	130	924450
TR 80/300 B 200	3.25		300	-	320	924460
TR 80/500 B 200	4.50		500	-	520	924470
TR 80/110 B 200 H	3.50	with support	110	80	130	924480
TR 80/300 B 200 H	5.15		300	250	320	924490
TR 80/500 B 200 H	6.90		500	400	520	924500

## TURNOVER ANCHOR CLAMP

For voltages of up to 1000 volt, for cable payout in 1 or 2 directions, for low speeds.

### Application


Mainly used in connection with plug and socket service or when a vertical seeding connection from underneath the cable tray is impossible.

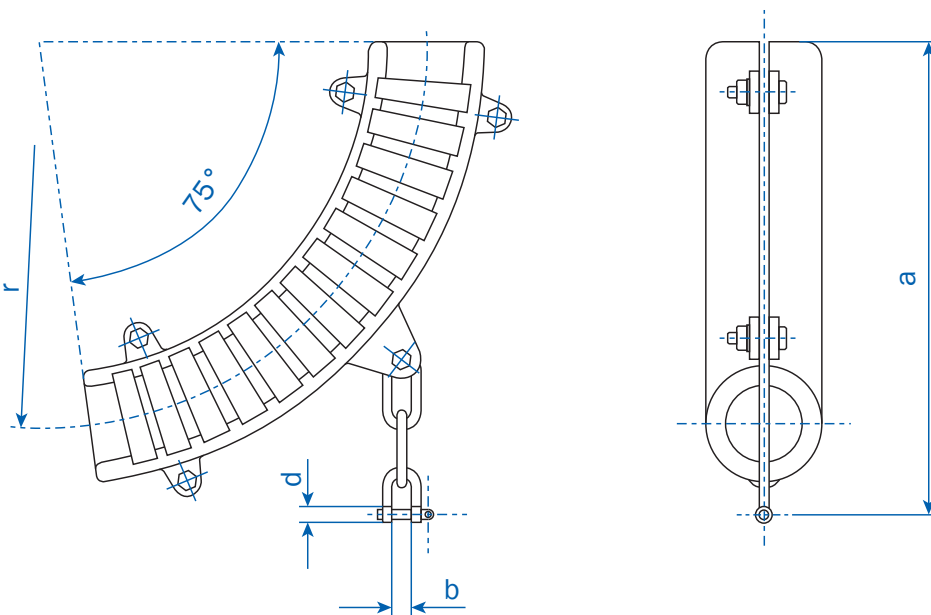

Type	Weight kg	Cable Ø	r	a	d	b	Order No.
LS 1	1.6	<21.5	100	205	10	14	921420
LS 2	2.5	>21.5-28.0	130	225	10	14	921430
LS 3	3.5	>28.0-36.5	170	265	12	17	921440
LS 4	5.5	>36.5-48.0	220	300	12	17	921450

INSTALLATION LAYOUT

Cable reel with guide roller  
and feed-point funnel

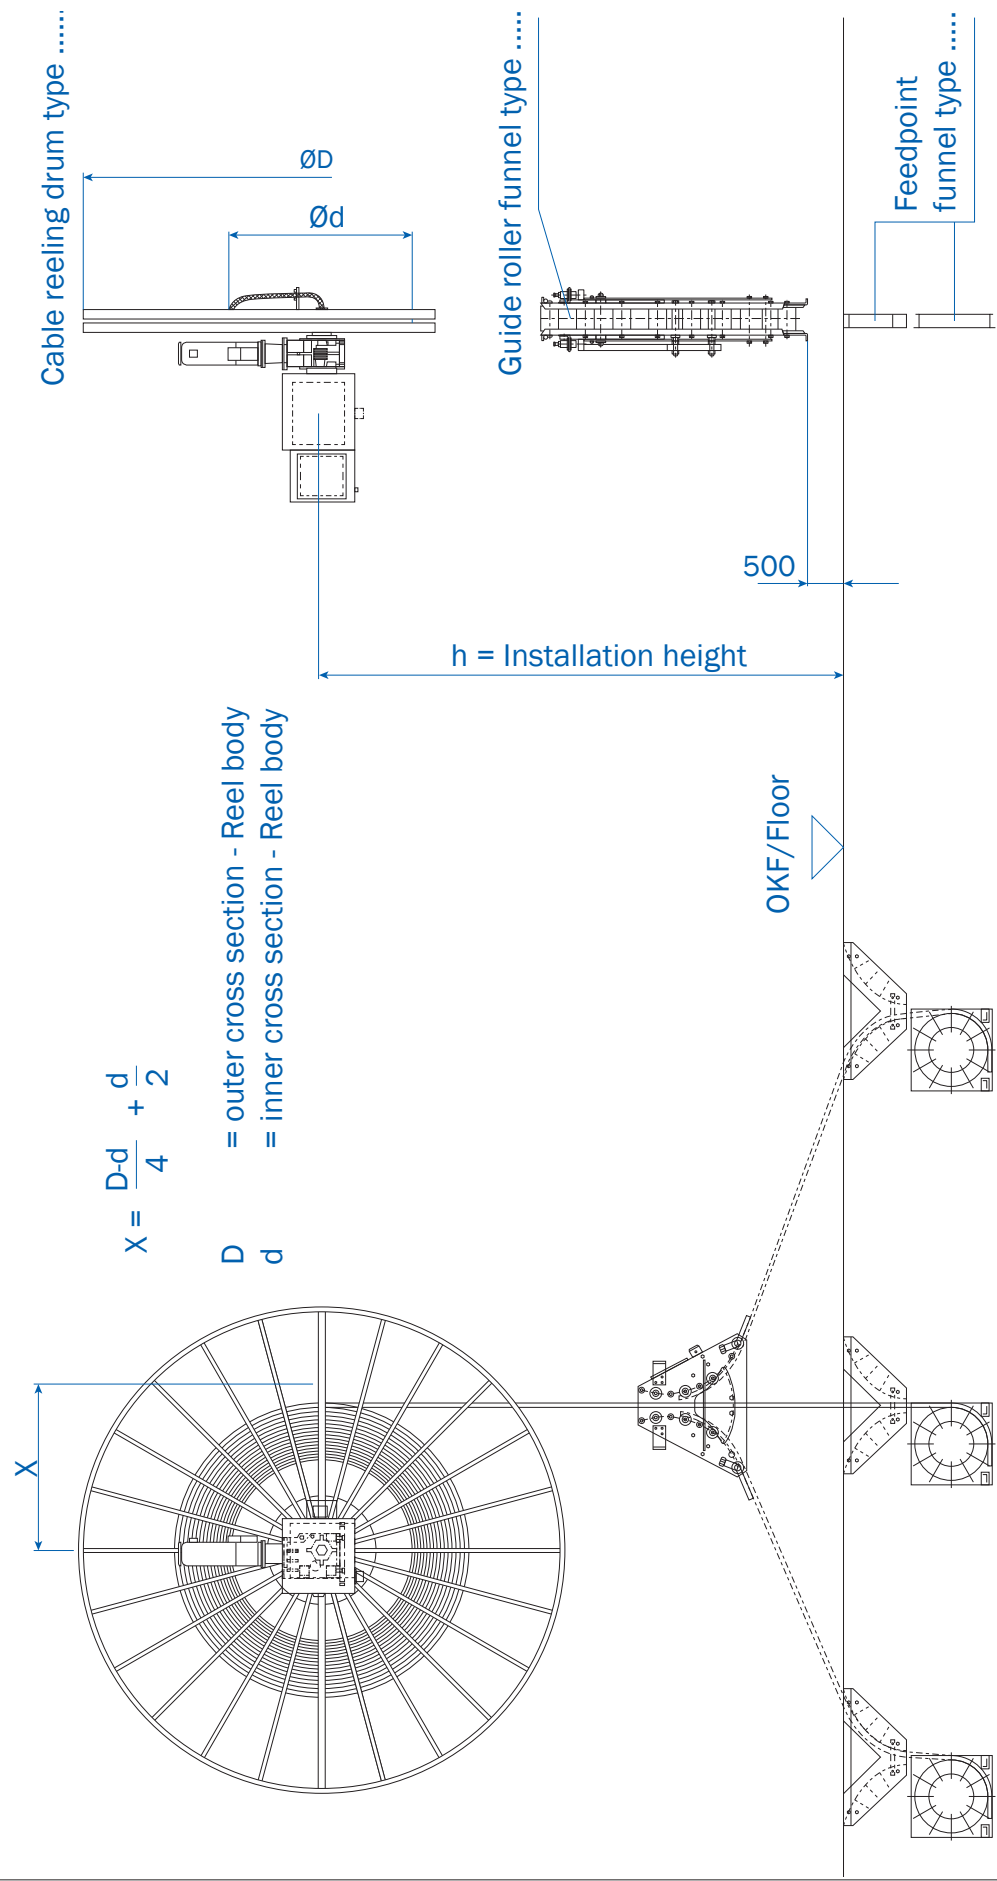



## QUESTIONNAIRE REELS

sales.usa@vahle.com, Phone: +1 713.465.9796, Fax: +1 713.465.1851

Please fill out the following questionnaire in order to determine which reel type is right for your application. Copy / print this page, fill out the questionnaire, and send it to your VAHLE experts. Please attach sketches to enable us to prepare a quotation.

### Company Information

Company Name

Address

State  ZIP

### Technical Planning Contact Person

Contact Person

Email Address

Phone Number

### Project Timeline (MM/DD/YY or MM/YY)

Quote Deadline  Delivery Deadline

Installation service is needed ☐ Yes ☐ No

Installation Start  Installation Finish

### Purchasing Contact Person

Contact Person

Email Address

Phone Number

### System Information

Installation type No.

(see page 6 of the catalog)

Application Type (i.e. STS Crane, Gantry Crane, Transfer Cart)

Total Travel Length of Equipment  m  ft

Height from reel center to surface (dimension 'h')  m  ft

Cable Payout ☐ One-way ☐ Two-way

Operational length of active cable (I)  m  ft

Total cable length for vertical type 8 (L)  m  ft

Additional weight for vertical type 8 (pendant control or receptacles)  kg  lb

### Power Requirements

Volt  Hz

Type of Current ☐ 3-phase ☐ AC ☐ DC

Max. Power Consumption of machine at full load  hp, A, kW

Nominal Current ( $I_N$ )  A Inrush Current ( $I_A$ )  A

Which % of total installed ampacity works simultaneously?  % Duty Cycle  %

### Reel Motor

Duty Cycle  % if replacing existing reel

Reel drive motor voltage  Volt  Hz

Limit switches or other additional accessories required (please add notes) ☐ Yes ☐ No

☐ Random wrap ☐ Mono-spiral wrap

### Cable type and brand if known

No. of cores  X  ☐ Cu mm<sup>2</sup> ☐ AWG

Weight of cable if known  kg/m  lb/ft

Diameter of cable if known  mm  inch

Number of Sliprings Total  No. of Phase sliprings

1 non-insulated PE/Ground is always included No. of Sliprings for Data Communication / Signals

Max. Travel Speed or Lift Speed  m/min  ft/min

Acceleration  m/s<sup>2</sup>  ft/s<sup>2</sup>

Acceleration time, s

Cycles per hour  Hours per day

☐ Indoor ☐ Outdoor ☐ Indoor + Outdoor

Ambient Temperature  min.  max.  °C  °F

### Additional notes, including environmental conditions

Please send us the form after it is filled out to receive a free quote.

## SELECTED REFERENCES

### Container crane at Bremerhaven international harbor

Frequency regulated drive with strain regulation including control. Slip ring body 10 kV with 12 channel LWL-rotation transmission.

Reel bodies: 7.4 m  
 Winding lengths: 500 m  
 Cable: NTSCGEWÖU  
 6 kV, 3x95 +  
 2x50/3 + 18 LWL  
 Operating speed: 55 m/min.  
 Installation height: 20 m

In use since 2002.



### Container crane at Duisburg Rhine Harbor

Frequency regulated drive with strain regulation including control. Slip ring body 10 kV with 6 channel LWL-rotation transmission.

Reel bodies: 5.3 m  
 Winding length: 500 m  
 Cable: NTSCGEWÖU  
 10 kV, 3x3.5 +  
 2x25/2 + 6 LWL  
 Operating speed: 120 m/min.  
 Installation height: 6 m

In use since 2004.






## SELECTED REFERENCES

### Container crane in Hamburg harbor

Frequency regulated drive with strain regulation including control. Slip ring body 10 kV with 18 channel LWL-rotation transmission.

Reel bodies: 7.2 m  
 Winding length: 650 m  
 Cable: NTSCGEWÖU  
 10 kV, 3x50 +  
 2x25/2 + 18 LWL  
 Operating speed: 45 m/min.  
 Installation height: 22 m

In use since 2004.

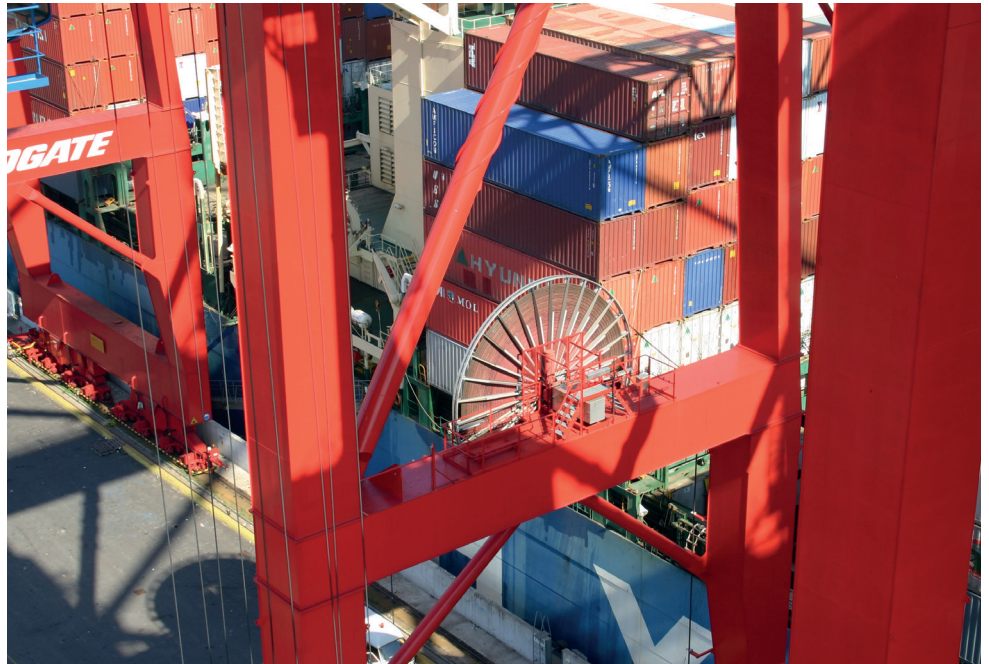

### Container crane in Mediterranean harbor Ashod/Israel

Frequency regulated drive with strain regulation including control. Slip ring body 10 kV with 6 channel LWL-rotation transmission.

Reel bodies: 6.4 m  
 Winding width: adjustable  
 Winding length: 400 m  
 Cable: NTSCGEWÖU  
 6 kV, 3x70 +  
 2x25/+6 LWL  
 Operating speed: 45 m/min.  
 Installation height: 18.5 m

In use since 2004.





**VAHLE, Inc.**

**407 Cane Island Parkway  
Katy, Texas 77494, USA**

**Phone: +1 713.465.9796  
Fax: +1 713.465.1851**

**sales.usa@vahle.com  
www.vahle.com**

**You can find your local contact at:  
[www.vahle.com/contact](http://www.vahle.com/contact)**