


VKS

COMPACT CONDUCTOR SYSTEMS




APPLICATION EXAMPLES

High-Bay Warehouses, AS/RS

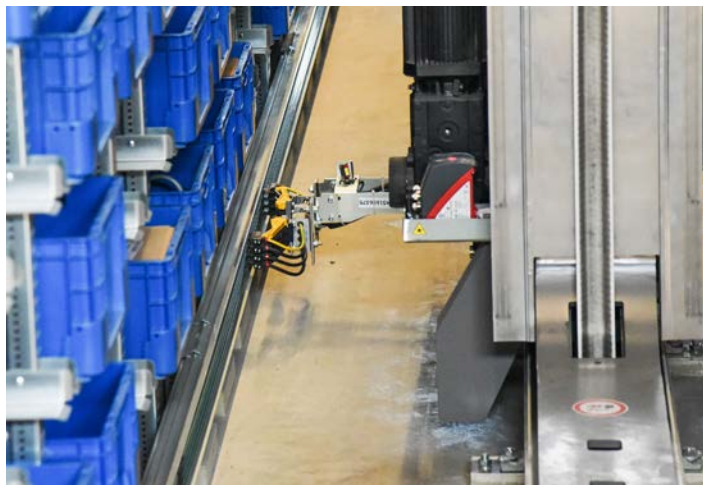

Monorail Systems

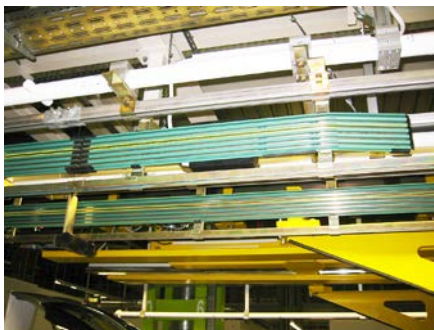


Conveyors, Tools and Workstations



COMPACT CONDUCTOR SYSTEMS VKS

Application	Contents	page
1. AS/RS	General	4, 5
	Layout planning.....	6
2. Skillet Lines	Support Spacing, Support Profile.....	6
	Standard sections	7, 8, 9
3. Shuttles	Curves	10
	Joining material.....	10
4. Parking Garages	Hangers	11
	End caps	11
5. Transborders	Feeds	12, 13
	Transfer guides.....	14, 15
	Transfer funnels	15, 16
	Current collectors KSTU 30/55, KSFU 25.....	17
	Current collectors KESR 32-55	18
	Current collectors KESL 32-55	19
	Expansion sections	20
	Sectionalizing	20
	Accessories and spares for collectors	21, 22, 23
	General spare parts	23
	Mounting brackets	24
	Snap-on brackets	25
	7-pole VKS system for High-Bay Storage	25
	Examples of orders	26, 27

SYSTEM OVERVIEW

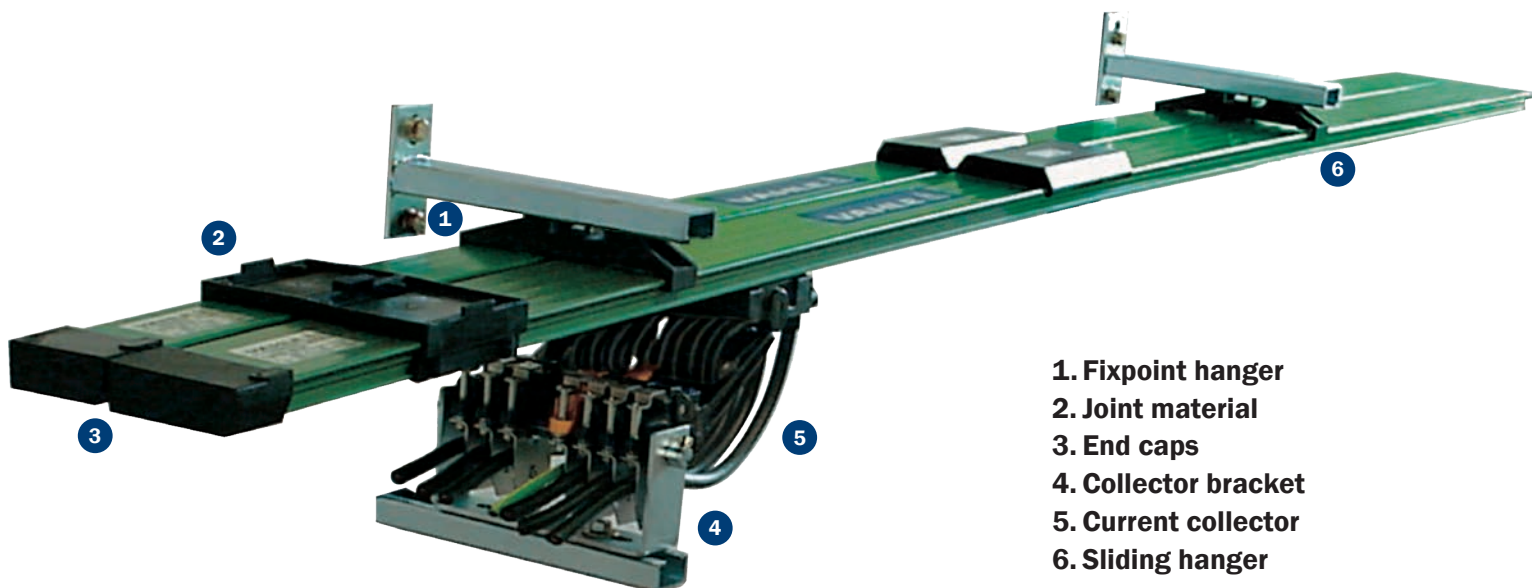

- 1. Fixpoint hanger
- 2. Joint material
- 3. End caps
- 4. Collector bracket
- 5. Current collector
- 6. Sliding hanger

GENERAL

VAHLE conductor systems VKS are space saving conductor systems, designed to prevent any accidental contact and hazard to personnel and are test finger proof to regulations VDE 0470, part 1 (EN 60529), protection code IP 21. They comply with the accident and VDE regulations in electrical, mechanical and fire engineering cases. Collectors are proof against accidental touch only when fully entered into conductor rail.

Conductor system installations within reach of hand require a special protection on the part of operator against accidental touch of current collectors which are leaving the conductor rail (e.g. locking or cut-off the power).

This is applicable for voltages above 25V AC respectively 60V DC. If the cross-section of the N-conductor is smaller than the cross-section of the outer conductor, it must be protected against overcurrent and short-circuit in accordance with IEC60364-4-43 (HD 60364-4-43).

The creeping distance between the conductors of the VKS-conductor is 30 mm. The different plastic housings hold from 3 to 6 copper or stainless steel conductors. Multiple conductor systems can be easily designed by combining several plastic housings.

The minimal space required allows the systems to be integrated in the crane or hoist track or in other special runway profiles. The minimal required space allows a direct layout in rail tracks or special track profiles. The conductor systems VKS can be used **for indoor and roof-over (rain protected) applications**. They can be installed with lateral or suspended mounting and straight or curved tracks are available.

PLEASE NOTE

Please consult factory for galvanizing plants, pickling lines, other aggressive or deep freeze ambients, as well as low voltage and data transmission applications, indicating special environmental conditions.

To speed up quotations and order processing, we would appreciate receiving your drawings or sketches for conductor systems with curves, dead sections, turntables, switches, etc.

Electrical properties	VKS
Max. ampacity	140A ⁽²⁾
Allowed voltage	690 V ⁽³⁾
Electrical strength DIN 53481	>25 kV/mm
Special electrical strength IEC 60093	1×10^{14} Ohm x cm
Surface resistance IEC 60093	$2,1 \times 10^{13}$ Ohm
Creep resistance IEC 60112	CTI > 400
Flammability	Flame resistant, self extinguishing, UL 94 V0

Conductor material	Cross section mm ²	Impedance 50 Hz Ohm/1000 m	Resistance Ohm/1000 m
Copper	16	1.107	1.102
	25	0.730	0.723
	30	0.603	0.595
	35	0.520	0.510

Mechanical properties	N/mm ²
Flexible strength	70 – 80
Tensile strength	40 – 53

Chemical resistance of the isolating profile at +45° C ambient temperature	
Benzine, petroleum, fats	resistant
Caustic soda up to 50 %	resistant
Hydrochloric acid, concentrated	resistant
Sulfuric acid up to 50 %	resistant

Water absorption	%
Max. at 100 °C	1
Max. at 20 °C	0.06

Ambient temperature range	°C
Rail length up to 4 m	–30 ⁽¹⁾ up to +55
Rail length > 4 m	from 0 ⁽¹⁾ up to +40

(1) Consult factory for use below 0 °C (32 ° F)

(2) 80 % ED

(3) UL-approval: $U_{UL} = 600$ V

GENERAL

Use for indoor applications, roof-over outdoor applications

Hoists, monorail systems, stacker cranes, machine tools, production and testing lines, also for sliding switches, turntables, hoisting stations, transfers, and many other applications, including data and signal transmission.

Sections

The well insulating plastic housing holds 3 – 6 conductors and offers safe isolation. The ends of each section are milled in to provide the required creepage distance. 4 and 6 m standard lengths and shorter sections to coincide with your runway requirements are available. The ground conductor is identified by the international yellow color coding. The conductor rail for control current is without PE-marking. The asymmetrical housing avoids phase reversing.

Joints

The plastic sections are connected with plastic joint caps, the conductors with spring-loaded copper connectors.

Feed Sets

End feeds or line feeds with terminal boxes are available, also low mounting line feeds for cable connection. Line feeds come factory assembled on 1 m long sections. End feeds come unassembled without any section.

Hangers

All sections are to be fixed from at least 1 hanger and the maximum permissible support centers of 1000 mm (with double collectors. 800 mm), must be adhered to (see page 7). The hangers are equipped with M 6 bolts and hardware and can be mounted directly to hanger brackets, monorail tracks or special runway profiles. The sections are snapped into the hangers. Sliding hangers allow free movement of the conductor system to compensate for temperature variations. Fixpoint hangers with tapping screw from anchor points (see installation procedure). For this we have to consider a max. distance of 6 m between two fixpoints.

Selection of conductors in accordance to ampere load and environmental conditions:

- VKS** .../**63** copper conductor for power and control system and data transmission (continuous current up to 63A)
 .../**100** copper conductor for power and control system (continuous current up to 100A)
 .../**120** copper conductor for power and control system (continuous current up to 120A)
 .../**140** copper conductor for power and control system (continuous current up to 140A)

Several combinations of cross sections are possible for one conductor type.

Brackets

Support brackets for easy installation are available (see page 27).

Collectors

The collectors have a continuous rating of 20A up to 120A. One collector is required for each phase and earth conductor. The ground collectors have a yellow color and different attachments to avoid interchangeability with phase collectors.

The collectors have spring loaded carbon brushes for a constant positive contact with the conductors. Collectors are to be mounted onto towing plates or are to be attached to the moving equipment by means of towing brackets type UM. Systems with transfers, switches, turntables, etc. require 2 single collectors or one double collector per conductor. The length of the collector cable may not exceed 3 m if the added overcurrent protection device is not designed for the load capacity of this cable. Please refer also to regulations VDE 0100, part 430 and EN 60204-32. (Note: this might happen in case of several collectors running in one system).


The provided connecting cables are sufficient for the stated nominal currents. For the different laying procedures the reductions factors according to DIN VDE 0298-4 have to be considered.

Conductor dead sections

Conductor dead sections are electrical interruptions of the conductor. Under normal operating conditions a cross over with collectors to switch the voltage off or on is only allowed with low power ratings (e.g. control signals) and equal potentials/voltages. Conductor dead sections can be mounted at any position of the system. The plastic inserts are pushed into the copper profiles and ensure a smooth transfer of the collector brushes. The length of isolating section has to consider the total length of carbon brush and whether carbon brush must or must not bridge the isolating area.

Special attention is required for double collectors or collectors switched in parallel. Use double isolating sections where necessary.

LAYOUT PLANNING

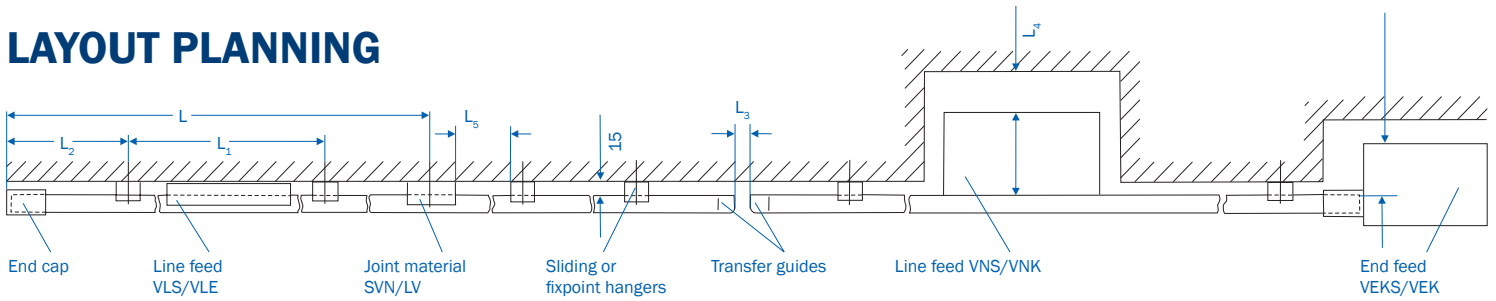

Symbols in layout plans

On layout plans these symbols are typically used (see p.26):

Symbol	Part description	Type
---	Track	-
—	Conductor rail	VKS
— T —	Joint material	SVN
— + —	Joint material	-
— ● —	Fixpoint hanger	VEPS
— ● —	Sliding hanger	VAS
[]	End cap	VES
■	End feed, power	VEKS
□	End feed, control	VEKS
— ■ —	Line feed, power	VNS
— □ —	Line feed, control	VNS
— □ —	Line feed, power and control	VLS
▶	Transfer guide, straight	VU
▶	Transfer guide, oblique	VUS
▷	Transfer funnel	VEM
— I —	Expansion section	DVKS
— II —	Isolating assembly	VSTS

L = Conductor rail section

(Standard lengths: 1 m, 2 m, 3 m, 4 m, 5 m, 6 m or cut to suit the system)

L₁ = Support spacing

for straight runs: max. 1 m
for curved runs: max. 0.5 m

L₂ = Extending length (max. 200 mm)

L₃ = Air gap for transfers, e.g. switches and dropout sections (3–5 mm)

L₄ = Space to remove feed box cover, if applicable

L₅ = Clearance for expansion of conductor system (min. 50 mm for VKS).

Max. Support spacing depending on the distance between collectors

at KSTU 30-55 (Fig. 1)	VKS
for straight runs	1000 mm 800 mm
for curved runs	500 mm 400 mm



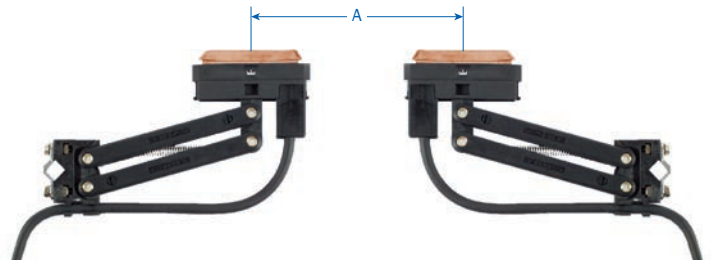


Fig. 1

A < 300 mm Support spacing 0.8 m

A > 300 mm Support spacing 1.0 m

With Support Profile VMT (catalog 3c) the support distance may be increased up to 3.5m (11' 6")

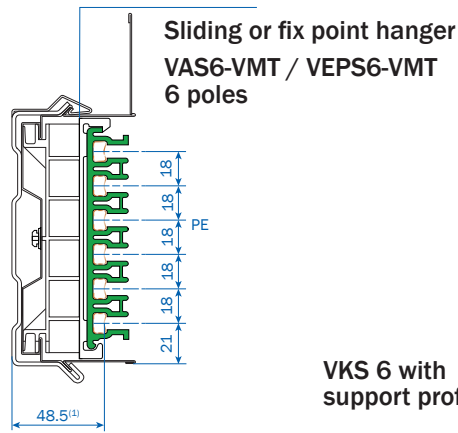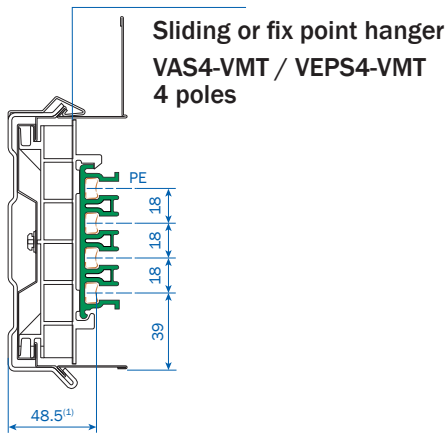

VKS 6 with support profile VMT




STANDARD SECTIONS VKS 3

3-pole sections

Standard length 4 and 6 m ⁽⁶⁾

Attention: Joint material to be ordered separately (see page *****10).

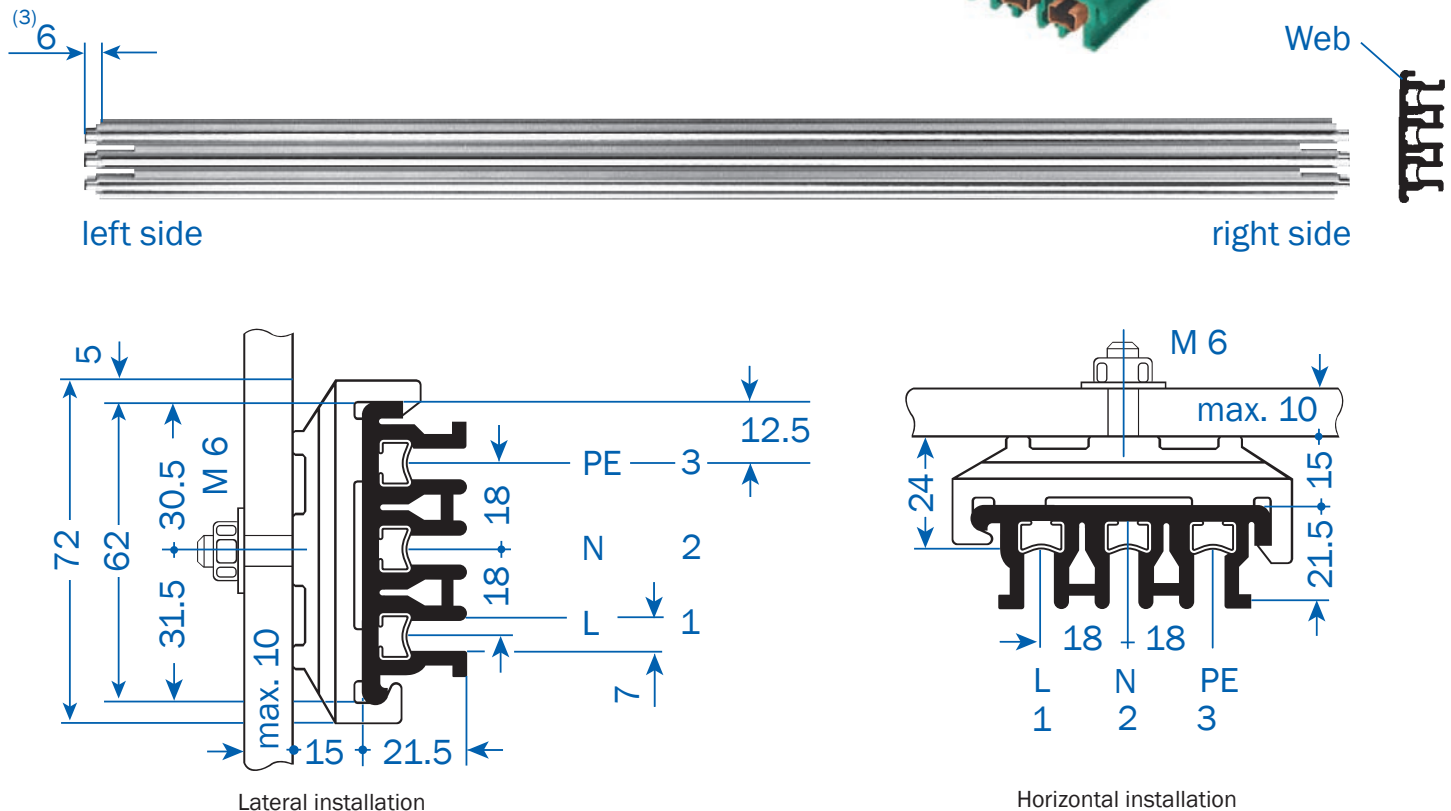

Type	No. of poles	Max. ampere rating at 35 °C A	Nominal voltage ⁽⁵⁾ V	Voltage drop per 100 m at full rating V	Conductor cross section ⁽⁴⁾ / mm ²		Conductor material	Weight kg/m	Order No.
VKS 3/ 63 HS	3	63	690	11.5	2 x 16	1 x 16	Cu	1.221	153896•
VKS 3/ 63 SS	3	63	690	11.5	2 x 16	1 x 16	Cu	1.221	153946•
VKS 3/100 HS	3	100	690	12.6	2 x 25	1 x 25	Cu	1.454	153906•
VKS 3/100 SS	3	100	690	12.6	2 x 25	1 x 25	Cu	1.454	153956•
VKS 3/120 HS	3	120	690	12.5	2 x 30	1 x 30	Cu	1.589	153916•
VKS 3/120 SS	3	120	690	12.5	2 x 30	1 x 30	Cu	1.589	153966•
VKS 3/140 HS	3	140 ⁽²⁾	690	11.3	2 x 35	1 x 35	Cu	1.724	154966•
VKS 3/140 SS	3	140 ⁽²⁾	690	11.3	2 x 35	1 x 35	Cu	1.724	156086•

(1) VKS 5 eliminates conductor number 6; plastic housing however identical to VKS 6.

(2) 80% ED

(3) Section is superseded 6 mm at 20 °C UT.

(4) Same cross section at PE (ground) when used for control line. Other conductor combinations are possible.

(5) Not with UL-approval; UUL= 600 V

(6) For supply lengths above 4 m refer to restricted ambient temperature (page 4).




- Last digit of order number indicates the section length in meters. Standard section lengths are 4m and 6m. In the table 6m sections are listed. Example: **Type** VKS 3/120 with PE/Ground, L=2m -> VKS 3/120-2 **HS**, Order No. 153912. Change the last digit of the Order No. from 6 to 2. Shorter sections are made up from the next larger standard length.

STANDARD SECTIONS VKS 4

4-pole sections

Standard length 4 and 6 m ⁽⁶⁾

Attention: Joint material to be ordered separately (see page 10).

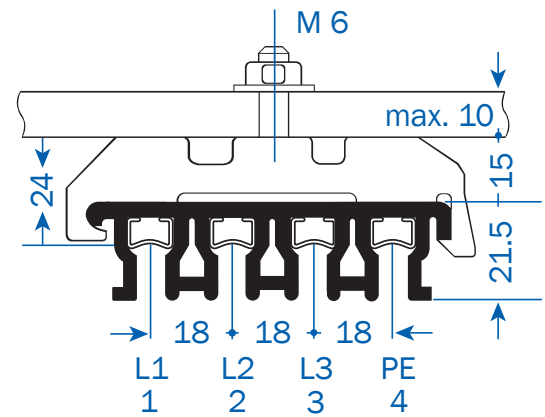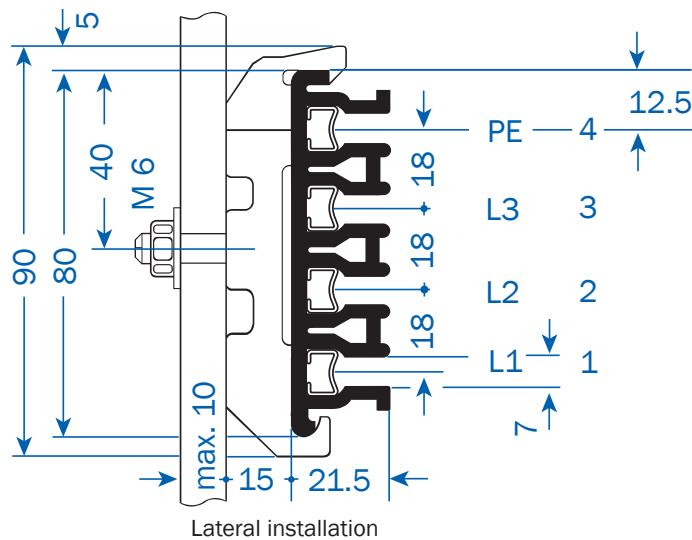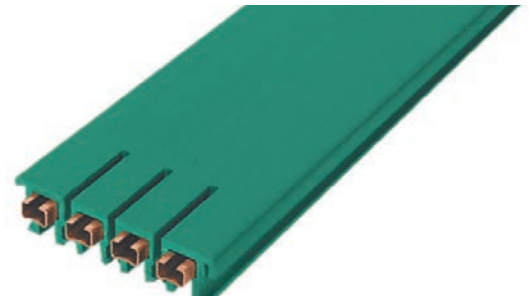

Type	No. of poles	Max. ampere rating at 35 °C A	Nominal voltage ⁽⁵⁾ V	Voltage drop per 100 m at full rating V	Conductor cross section ⁽⁴⁾ / mm ²		Conductor material	Weight kg/m	Order No.
					L ₁ -L ₃ /1-3	PE/4			
VKS 4/ 63 HS	4	63	690	11.5	3 x 16	1 x 16	Cu	1.459	153996 •
VKS 4/ 63 SS	4	63	690	11.5	3 x 16	1 x 16	Cu	1.459	154046 •
VKS 4/100 HS	4	100	690	12.6	3 x 25	1 x 16	Cu	1.693	154006 •
VKS 4/100 SS	4	100	690	12.6	3 x 25	1 x 16	Cu	1.693	154056 •
VKS 4/120 HS	4	120	690	12.5	3 x 30	1 x 16	Cu	1.828	154016 •
VKS 4/120 SS	4	120	690	12.5	3 x 30	1 x 16	Cu	1.828	154066 •
VKS 4/140 HS	4	140 ⁽²⁾	690	11.3	3 x 35	1 x 16	Cu	1.956	154316 •
VKS 4/140 SS	4	140 ⁽²⁾	690	11.3	3 x 35	1 x 16	Cu	1.956	156546 •

(1) VKS 5 eliminates conductor number 6; plastic housing however identical to VKS 6.

(2) 80 % ED

(3) Section is superseded 6 mm at 20 °C UT.

(4) Same cross section at PE (ground) when used for control line. Other conductor combinations are possible.

(5) Not with UL-approval; UUL= 600 V




(6) For supply lengths above 4 m refer to restricted ambient temperature (page 4).

- Last digit of order number indicates the section length in meters. Standard section lengths are 4m and 6m. In the table 6m sections are listed. Example: Type VKS 4/120 with PE/Ground, L=2m -> VKS 4/120-2 HS, Order No. 154012. Change the last digit of the Order No. from 6 to 2. Shorter sections are made up from the next larger standard length.

5- and 6-pole sections

Standard length 4 and 6 m ⁽⁶⁾

Attention: Joint material to be ordered separately (see page 10).

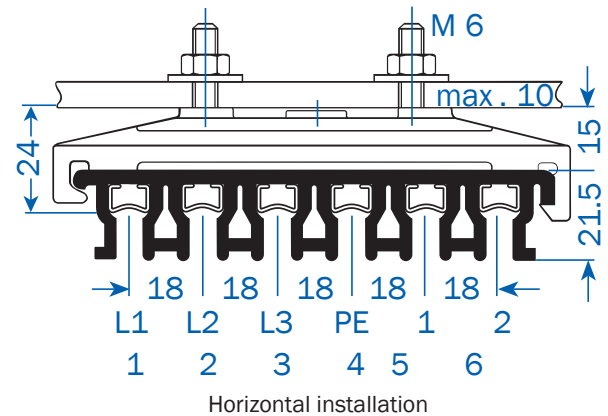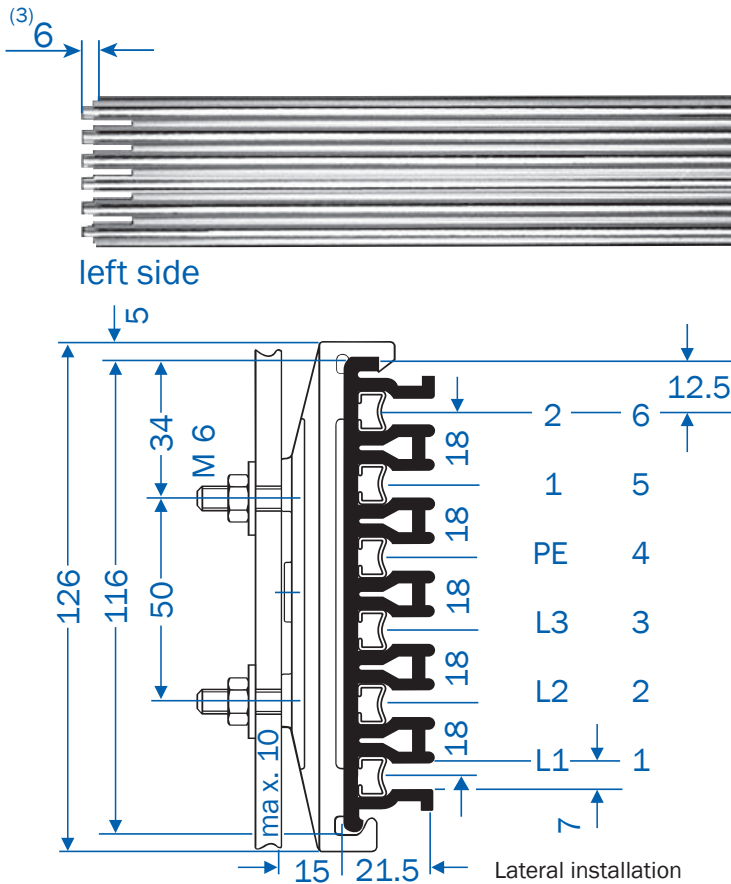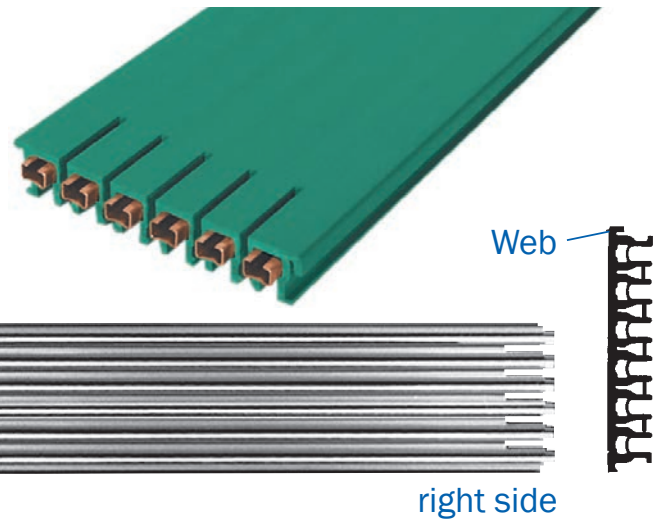

Type	No. of poles	Max. ampere rating at 35° C A	Nominal voltage ⁽⁵⁾ V	Voltage drop per 100 m at full rating V	Conductor cross section ⁽⁴⁾ / mm ²			Con-ductor material	Weight kg/m	Order No.
					L ₁ -L ₃ /1-3	PE/ 4	1.2/5.6			
VKS 5/ 63 HS ⁽¹⁾	5	63	690	11.5	3x16	1x16	1x16	Cu	2.058	154096•
VKS 5/ 63 SS ⁽¹⁾	5	63	690	11.5	3x16	1x16	1x16	Cu	2.058	154146•
VKS 5/100 HS ⁽¹⁾	5	100	690	12.6	3x25	1x16	1x16	Cu	2.292	154106•
VKS 5/100 SS ⁽¹⁾	5	100	690	12.6	3x25	1x16	1x16	Cu	2.292	154156•
VKS 5/120 HS ⁽¹⁾	5	120	690	12.5	3x30	1x16	1x16	Cu	2.427	154116•
VKS 5/120 SS ⁽¹⁾	5	120	690	12.5	3x30	1x16	1x16	Cu	2.427	154166•
VKS 5/140 HS ⁽¹⁾	5	140 ⁽²⁾	690	11.3	3x35	1x16	1x16	Cu	2.549	154876•
VKS 5/140 SS ⁽¹⁾	5	140 ⁽²⁾	690	11.3	3x35	1x16	1x16	Cu	2.549	156556•
VKS 6/ 63 HS	6	63	690	11.5	3x16	1x16	2x16	Cu	2.202	154196•
VKS 6/ 63 SS	6	63	690	11.5	3x16	1x16	2x16	Cu	2.202	154246•
VKS 6/100 HS	6	100	690	12.6	3x25	1x16	2x16	Cu	2.436	154206•
VKS 6/100 SS	6	100	690	12.6	3x25	1x16	2x16	Cu	2.436	154256•
VKS 6/120 HS	6	120	690	12.5	3x30	1x16	2x16	Cu	2.571	154216•
VKS 6/120 SS	6	120	690	12.5	3x30	1x16	2x16	Cu	2.571	154266•
VKS 6/140 HS	6	140 ⁽²⁾	690	11.3	3x35	1x16	2x16	Cu	2.693	152606•
VKS 6/140 SS	6	140 ⁽²⁾	690	11.3	3x35	1x16	2x16	Cu	2.693	156566•

- See footnotes at page 8

CURVED SECTIONS, JOINT MATERIAL

Curved sections⁽¹⁾

per your layout drawing. Max. L = 3.60 m, support spacing: ~ 500 mm, max. angle 180°



Curved sections VKS 3⁽¹⁾

3-pole, see illustration above

Type	R mm	Surcharge Order No.
Horizontal curve, right	400 – 900	150385
Horizontal curve, left	400 – 900	150386
Horizontal curve, right	> 900	153120
Horizontal curve, left	> 900	153130
Inside curve	200 – 800	150387
Inside curve	> 800	153040
Outside curve	200 – 800	150388
Outside curve	> 800	153050

Curved sections VKS 4⁽¹⁾

4-pole, see illustration above

Type	R mm	Surcharge Order No.
Horizontal curve, right	400 – 900	150389
Horizontal curve, left	400 – 900	150391
Horizontal curve, right	>900	153717
Horizontal curve, left	>900	150110
Inside curve	200 – 800	150392
Inside curve	>800	153718
Outside curve	200 – 800	150393
Outside curve	>800	150100

Curved sections VKS 5, VKS 6⁽¹⁾


5- and 6-pole, see illustration above

Type	R mm	Order No.	
		VKS 5	VKS 6
Horizontal curve, right	400 – 900	150394	150398
Horizontal curve, left	400 – 900	150395	150399
Horizontal curve, right	>900	153719	153721
Horizontal curve, left	>900	152090	152110
Inside curve	200 – 800	150396	150401
Inside curve	>800	153720	153722
Outside curve	200 – 800	150397	150402
Outside curve	>800	152080	152100



Joint material for VKS 3


3-pole

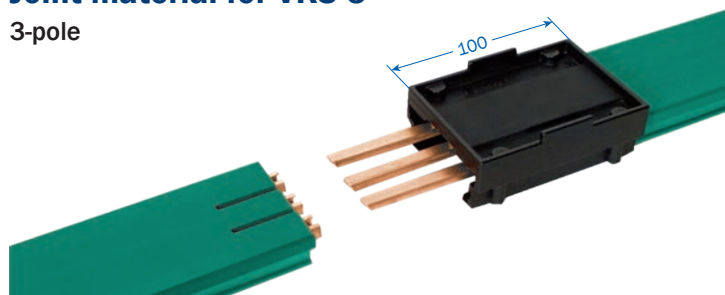

Type	No. of poles	Weight kg	Order No.
SVN 3/ 63 - 100	3	0.112	156533
SVN 3/120 - 140	3	0.112	156534

Joint material for VKS 4


4-pole

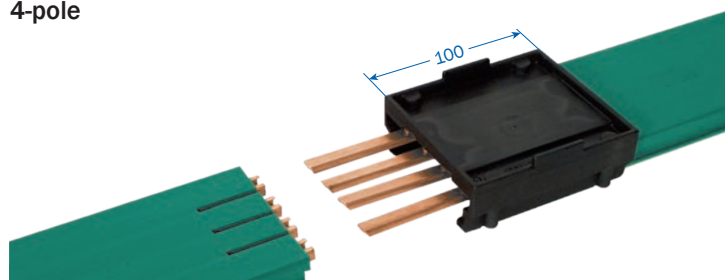

Type	No. of poles	Weight kg	Order No.
SVN 4/ 63 - 100	4	0.136	156535
SVN 4/120 - 140	4	0.136	156536

Joint material for VKS5, VKS 6

5- and 6-pole

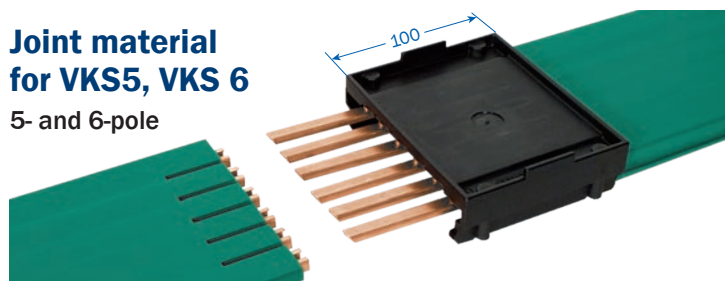


Type	No. of poles	Weight kg	Order No.
SVN 5/ 63 - 100	5	0.180	156537
SVN 5/120 - 140	5	0.180	156538
SVN 6/ 63 - 100	6	0.194	156539
SVN 6/120 - 140	6	0.194	156540

(1) Curved sections will be factory prepared with a 100 mm straight section on both ends. Horizontal curves with more than 90 degrees should be divided in two or more sections.

HANGERS, END CAP

Fixpoint hanger⁽¹⁾


3-pole
with tapping screw and clamp

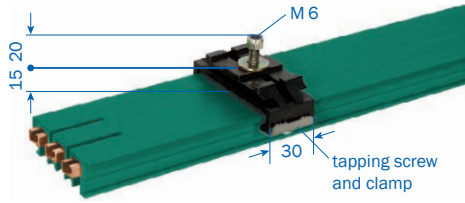

Type	Weight kg	Order No.
VEPS 3	0.042	153070

Sliding hanger⁽¹⁾


3-pole

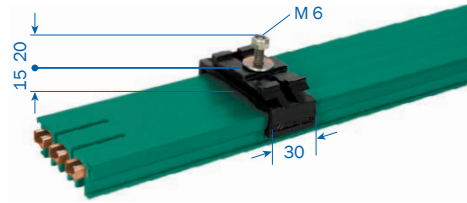

Type	Weight kg	Order No.
VAS 3	0.036	153060

End cap⁽²⁾


3-pole
suitable left and right

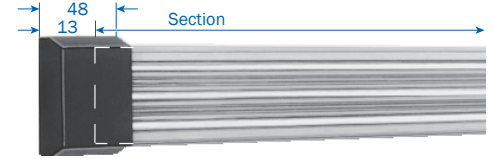

Type	Weight kg	Order No.
VES 3 - L	0.033	153080
VES 3 - M	0.033	152023

Fixpoint hanger⁽¹⁾


4-pole
with tapping screw and clamp

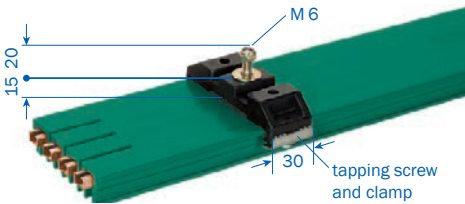

Type	Weight kg	Order No.
VEPS 4	0.046	150120

Sliding hanger⁽¹⁾

4-pole

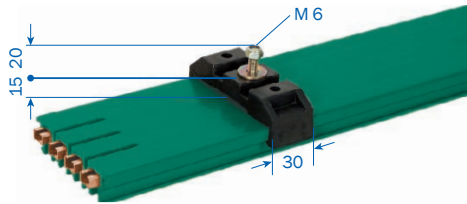

Type	Weight kg	Order No.
VAS 4	0.040	150130

End cap⁽²⁾


4-pole
suitable left and right



Type	Weight kg	Order No.
VES 4 - L	0.039	150140
VES 4 - M	0.039	152022

Fixpoint hanger⁽¹⁾


6-pole
with tapping screw and clamp

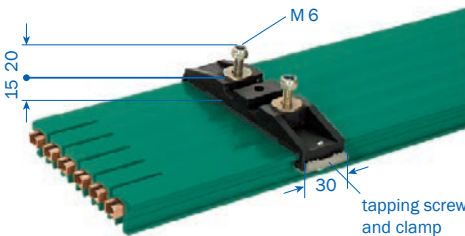

Type	Weight kg	Order No.
VEPS 6	0.062	152120

Sliding hanger⁽¹⁾


6-pole

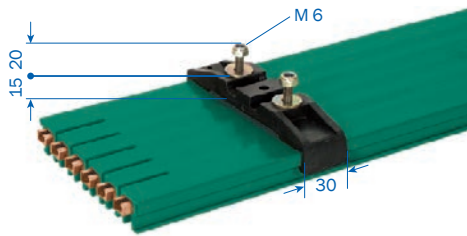

Type	Weight kg	Order No.
VAS 6	0.056	152130

End cap⁽²⁾

6-pole
suitable left and right

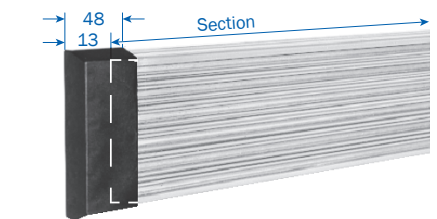

Type	Weight kg	Order No.
VES 6 - L	0.051	152140
VES 46 - M	0.051	152021


(1) Complete with hardware (bolts, nuts, spring washers). Support spacing see page 6.

(2) L = loose; c/w hardware

FEEDS

End feed⁽¹⁾ for VKS 3


3-pole
Terminal box with terminal clamps

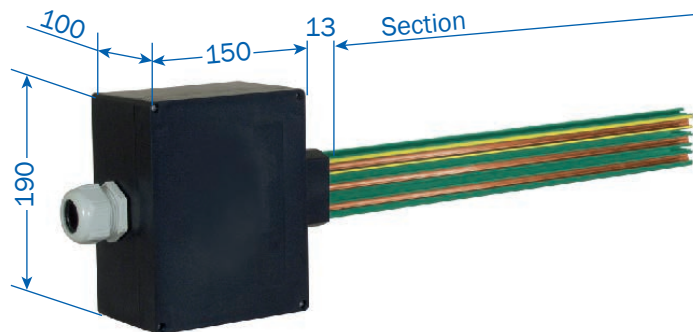

Type	Cable gland ⁽²⁾	Ampacity A	Weight kg	Order No.
VEKS 3/63 - 120 L	ST-M 40x1.5	63-120	1.150	156422
Surcharge for assembling				156423

End feed⁽¹⁾ for VKS 4


4-pole
Terminal box with terminal clamps

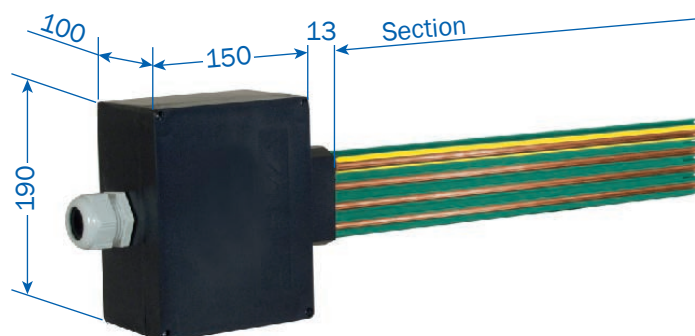

Type	Cable gland ⁽²⁾	Ampacity A	Weight kg	Order No.
VEKS 4/63 - 120 L	ST-M 40x1.5	63-120	1.230	156421
Surcharge for assembling				156423

End feed⁽¹⁾ for VKS 5 and VKS 6

5- and 6-pole
Terminal box with terminal clamps

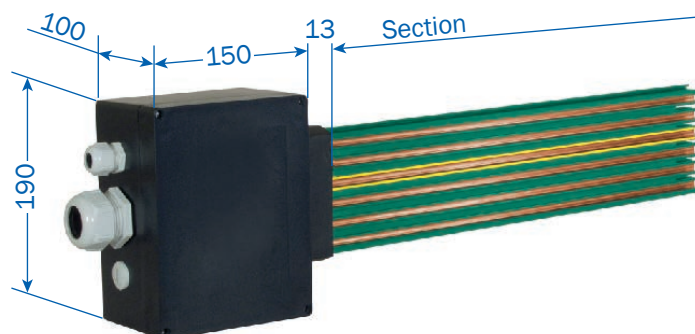

Type	Cable gland ⁽²⁾	Ampacity A	Weight kg	Order No.
VEKS 5/63 - 120 L	ST-M 40x1.5 ST-M 20x1.5	63-120	1.380	156420
VEKS 6/63 - 120 L	ST-M 40x1.5 ST-M 20x1.5	63-120	1.460	156419
Surcharge for assembling				156423


(1) End feeds loose as components. Sections are to be ordered separately (see pages 7-9).

(2) Cable gland ST - M40x1,5 for cable Ø = 19-28 mm
ST - M20x1,5 for cable Ø = 7-13 mm

Terminal cross section: Phase = 35 mm²
PE/Ground = 35 mm²


FEEDS

Line feed⁽¹⁾ 3-pole

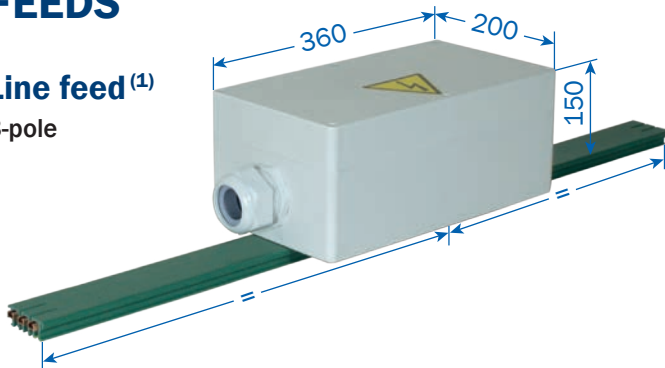


Type ⁽²⁾	Cable gland ⁽²⁾	Ampacity A	Weight kg	Order No.
VNS 3/63-140	STR-M63 x 1.5	63-140	1.876	157147

Line feed⁽¹⁾ 4-pole

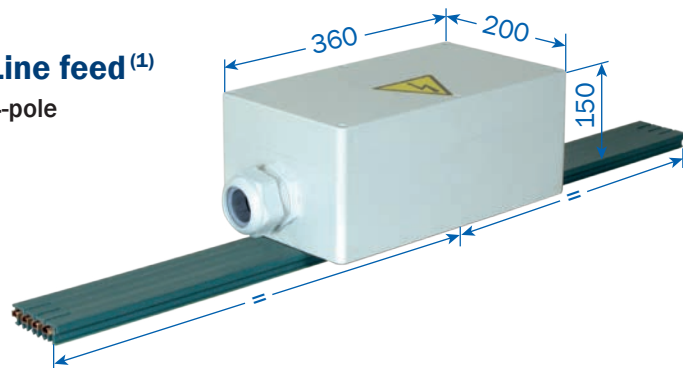

Type ⁽²⁾	Cable gland ⁽²⁾	Ampacity A	Weight kg	Order No.
VNS 4/63-140	STR-M63 x 1.5	63-140	1.982	157146

Line feed⁽¹⁾

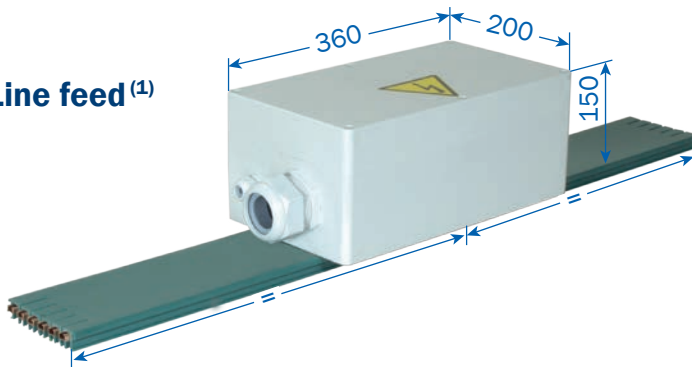

Type ⁽²⁾	Cable gland ⁽²⁾	Ampacity A	Weight kg	Order No.
VNS 5/63-140	STR-M63 x 1.5 STR-M20 x 1.5	63-140	2.080	157145
VNS 6/63-140	STR-M63 x 1.5 STR-M20 x 1.5	63-140	2.200	157144

(1) Line feeds will be normally installed on 1 m sections.
This sections have to be ordered separately. (see pages 7-9).
Connecting cable is provided by customer.


(2) Cable gland STR - M63x1,5 for Ø= 28–45 mm. Cable connection main: M10
Cable gland STR - M20x1,5 for Ø= 5–13 mm. Cable connection control: M5

(3) Cable connection with **attached** special cable lugs for single cores 35 mm² (up to conductor-Ø 8.5 mm) for 140 A,
25 mm² (up to conductor-Ø 8.2 mm) for 100-120 A

Line feed⁽¹⁾

3-pole without cable connection; terminal bolt M 6

VKS 3

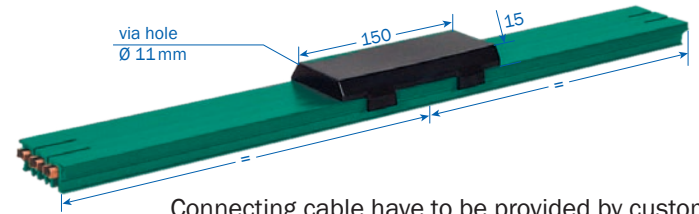


Connecting cable have to be provided by customer

Type	Lug mm ²	Ampacity A	Weight kg	Order No.
VLS 3/ 63	–	63	0.071	156948
VLS 3/100-120 ⁽³⁾	25	100-120	0.137	156944
VLS 3/140 ⁽³⁾	35	140	0.173	156958

Line feed⁽¹⁾

4-pole without cable connection; terminal bolt M 6

VKS 4

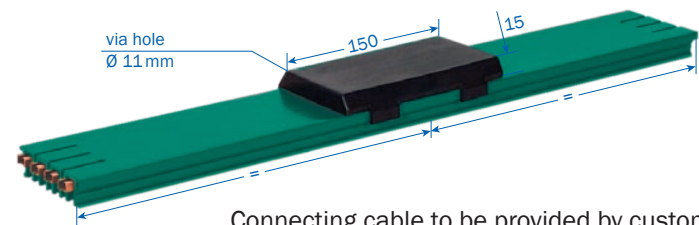


Connecting cable to be provided by customer

Type	Lug mm ²	Ampacity A	Weight kg	Order No.
VLS 4/ 63	–	63	0.091	156947
VLS 4/100-120 ⁽³⁾	25	100-120	0.179	156943
VLS 4/140 ⁽³⁾	35	140	0.227	156957

Line feed⁽¹⁾

5- and 6-pole without cable connection; terminal bolt M 6

VKS 5, VKS 6

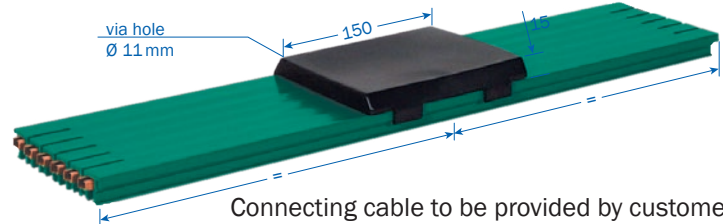

Connecting cable to be provided by customer

Type	Lug mm ²	Ampacity A	Weight kg	Order No.
VLS 5/ 63	–	63	0.115	156946
VLS 5/100-120 ⁽³⁾	25	100-120	0.225	156942
VLS 5/140 ⁽³⁾	35	140	0.285	156956
VLS 6/ 63	25	63	0.123	156945
VLS 6/100-120 ⁽³⁾	35	100-120	0.255	156941
VLS 6/140 ⁽³⁾	25	140	0.327	156955

TRANSFER GUIDES

Transfer guides⁽¹⁾

3-pole – for transfers, switches, spur lines
 Max. horizontal and vertical offset: ± 2 mm
 Application: – straight cuts
 – oblique cuts, lateral

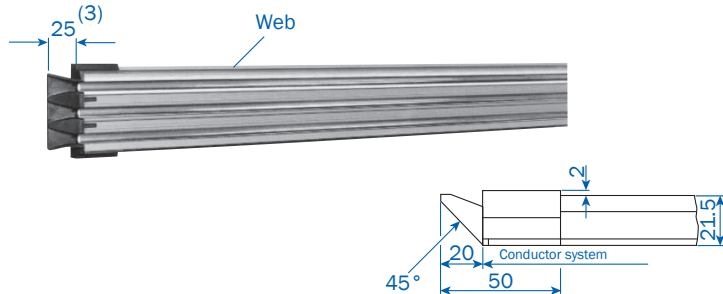


Photo shows left version

Type	Order No. Left version	Order No. Right version
VU 3 S-M	150191	150192
VU 3 S-L	150188	

Type M: factory assembled;

Type L: ⁽²⁾ loose delivery as a single component, complete with accessories

Transfer guide oblique cut⁽¹⁾

3-pole – for switches and turntables
 prepared per your layout drawings
 Application: oblique cuts, horizontal

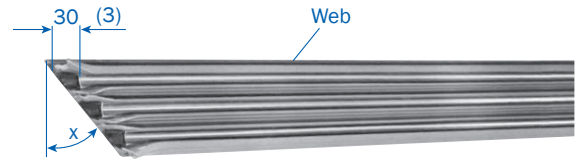


Photo shows left version

IP 21 up to $x = 45^\circ$

Type	Order No. Left version	Order No. Right version
VUS 3 H	150410	150420

Transfer guide⁽¹⁾

4-pole – for transfers, switches, spur lines
 Max. horizontal and vertical offset: ± 2 mm
 Application: straight cuts

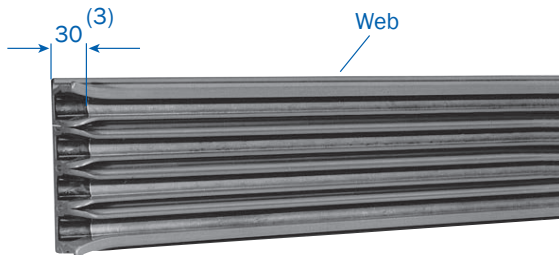


Photo shows left version

Type	Order No. Left version	Order No. Right version
VU 4	150160	150390

Type M: factory assembled;

Type L: ⁽²⁾ loose delivery as a single component, complete with accessories

Transfer guide oblique cut⁽¹⁾

4-pole – for switches and turntables
 prepared per your layout drawings
 Application: oblique cuts, horizontal and lateral

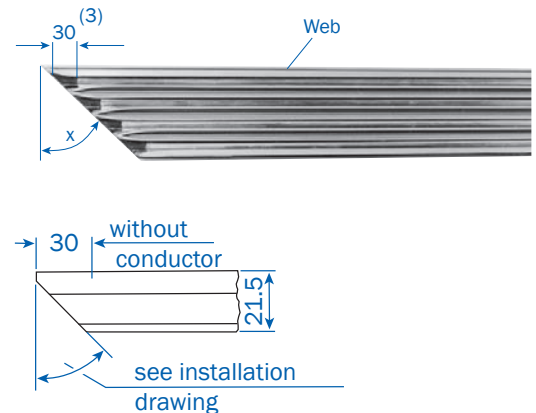


Photo shows left version

IP 21 up to $x = 45^\circ$

Type	Order No. Left version	Order No. Right version
VUS 4 H	150170	150400
VUS 4 S	153564	153565

H = for horizontal mounting

S = for lateral mounting (see pages 7-9)

(1) Fig. shows transfer and section. The section is included in the overall length. It will be charged separately for individual orders. (Specify type of conductor rail).

Transfer guide⁽¹⁾

6-pole – for transfers, switches, spur lines
 Max. horizontal and vertical offset: ± 2 mm
 Application: – straight cuts
 – oblique cuts, lateral

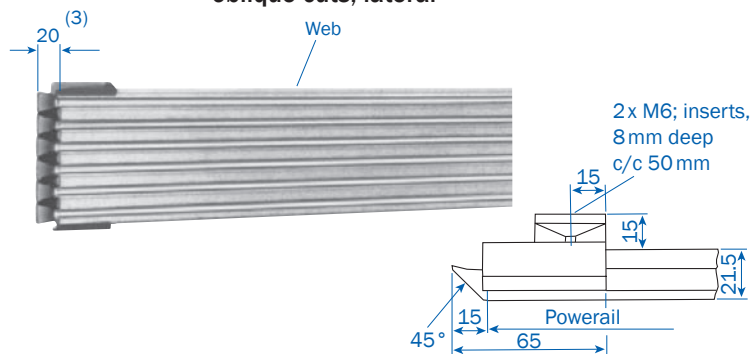


Photo shows left version for VKS 6 and VKS 5

Type	Order No. Left version	Order No. Right version
VU 6 S-M	153801	153802
VU 6 S-L	150215	

Transfer guide oblique cut⁽¹⁾

5- and 6-pole – for switches and turntables
 prepared per your layout drawings
 Application: oblique cuts, horizontal



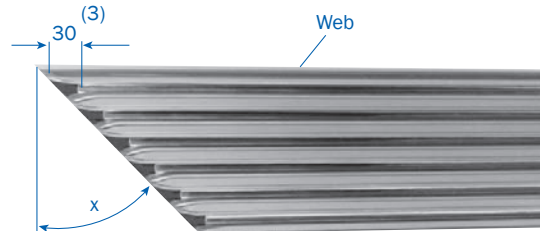


Photo shows left version

Type	Order No. Left version	Order No. Right version
VUS 5 H	152170	152300
VUS 6 H	152310	152320

TRANSFER FUNNELS FOR CURRENT COLLECTORS KSTU 30/55

for max. speed $v = 100$ m/min.⁽²⁾

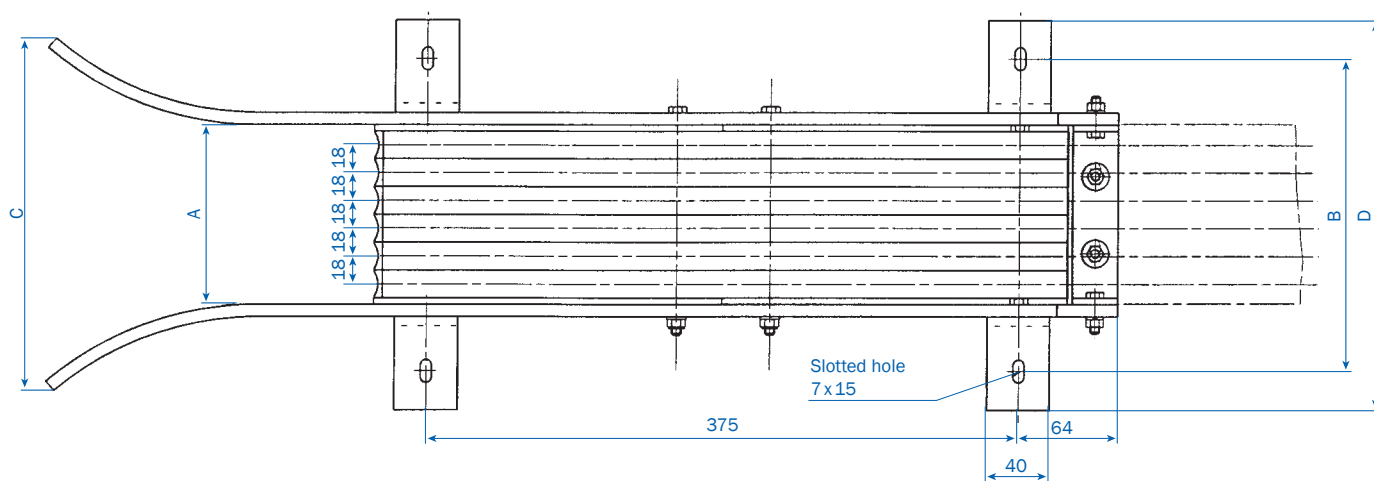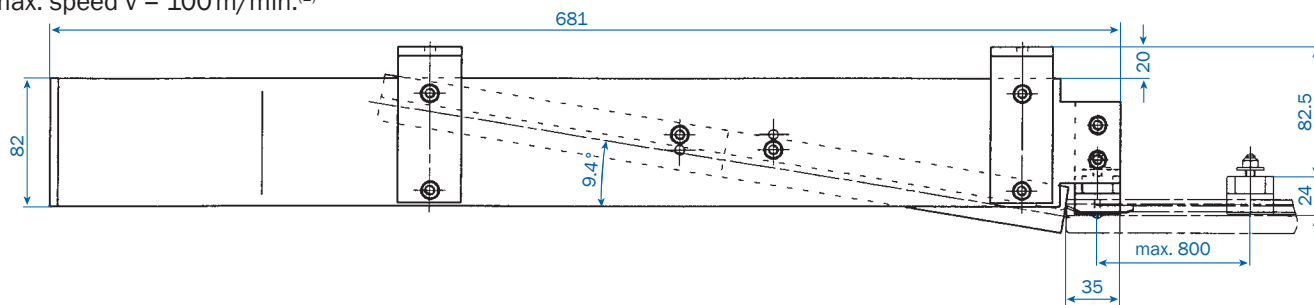

Type	A mm	B mm	C mm	D mm	Weight kg	Order No.	VU ... L ⁽¹⁾	VU ... R ⁽¹⁾
EFT V3 - KSTU	62	148	175	198	3.140	156144	150370	150380
EFT V4 - KSTU	80	166	193	216	3.320	156145	150160	150390
EFT V6 - KSTU	116	202	229	252	3.680	156146	152280	152290

(1) Conductor rail section must be factory prepared. Order separately for left hand VU ... L, for right hand VU ... R.


(2) Higher speeds on request

TRANSFER FUNNELS FOR CURRENT COLLECTORS KSFU 25⁽¹⁾

CURRENT COLLECTOR KSTU 30/55

with 2 m connecting cable;
contact pressure: ca. 5 N
For transfer funnels EFT V ... -KSTU
(in funnel area ± 10 to all sides)

For double arrangement of current collectors
and support spacing for conductor system see page 6.

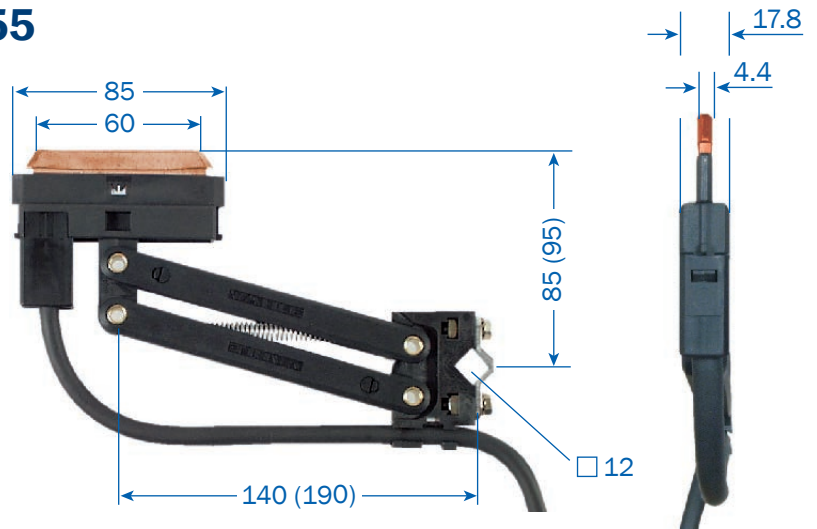


Type ⁽³⁾	Ampacity A	Connecting cable A/ mm ²	d max/ mm	Lift & Swivel deflection mm	Weight kg	Order No. Phase black	PE yellow
KSTU 30	30	2.50	5	± 20	0.240	152087	152088
KSTU 55	55	6.00	11	± 20	0.368	154441	154442

CURRENT COLLECTOR KSFU 25

with 1 m connecting cable
for transfer funnel EFT V ... -KSFU 25
(in funnel area ± 10 to all sides)

Max. ampacity: 25 A
Phase distance: 18 mm
Lift and swivel deflection: ± 15 mm
Contact pressure: ca. 3.5 N per carbon
PE on No. 4, with 3-poles on No. 3,
other arrangements possible
PE is first contact while entering conductor rail
Connecting cable cross section: 2.5 mm²
Connecting cable diameter: 4 mm

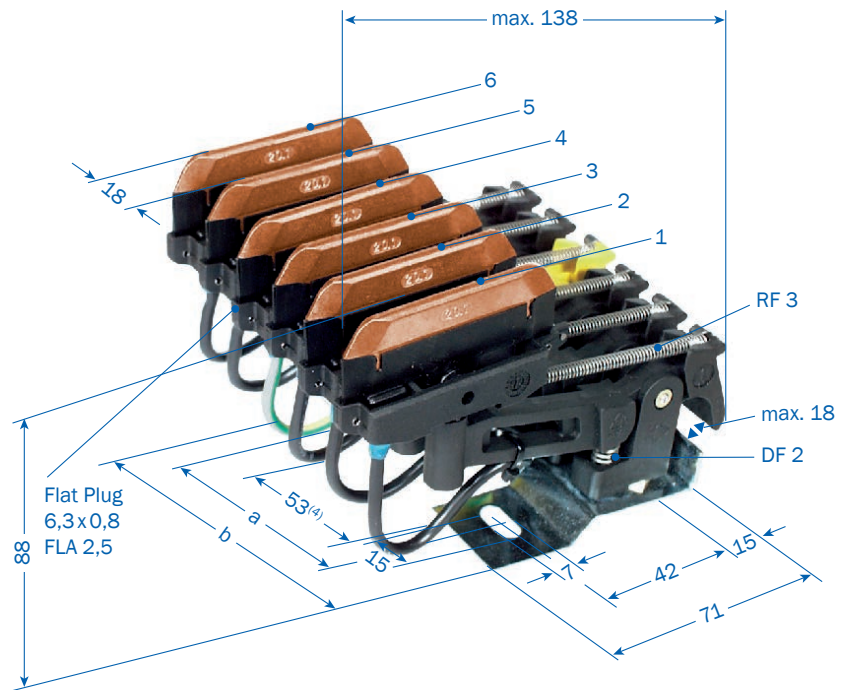

Type ⁽³⁾	Poles	a, mm	b, mm	Weight, kg	Order No. with PE/Ground - HS	without PE - ST
KSFU 25-2	2	18	43	0.182	155050	155059
KSFU 25-3	3	54	79	0.295	155051	155060
KSFU 25-4	4	54	79	0.352	155052	155061
KSFU 25-5	5	80	115	0.460	155053	155062
KSFU 25-6	6	80	115	0.517	155054	155063
Separately available Single Collectors:					Phase (PH)	Ground (PE)
Collector KSFU 25					155025	155026

(1) Description of conductor profiles see page 7-9.

(2) Length of the currentless track (longer designs on request).

(3) Types to be completed e.g. KSTU 30 R KSTU 30 PH Order No. 152087

CURRENT COLLECTOR KESR 32-55

Two-way conveying, short arm

Max. ampacity: 1 flat plug connection 32A – FLA 2,5
 40A – FLA 4,0
 55A – FLA 6,0


Phase distance 18 mm

Lift and swivel deflection ± 15 mm

Contact pressure: ca. 7 N per carbon

PE on No. 4, with 3-poles on No. 3, other arrangements possible

PE is first contact while entering conductor rail

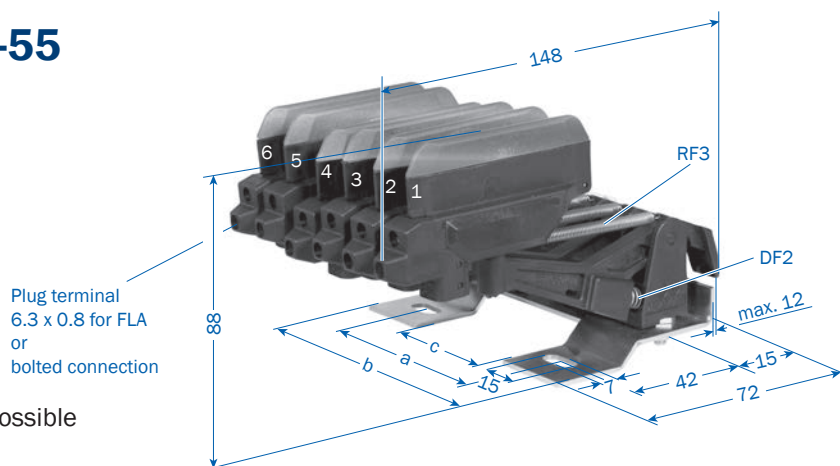

KESR 32-55 F (Flat plug connection)



Type ⁽¹⁾	Poles	a mm	b mm	c mm	Weight kg	Base plate	Order No. with PE -HS	without PE -ST
KESR 32-55 F- 3-18	3	54	79	–	0.393	4 poles (No. 4 = free)	157285	157290
KESR 32-55 F- 4-18	4	54	79	–	0.457	4 poles	157286	157291
KESR 32-55 F- 5-18	5	80	115	53	0.521	6 poles (No. 6 = free)	157287	157292
KESR 32-55 F- 6-18	6	80	115	53	0.585	6 poles	157288	157293
Separately available Single Collectors:							Phase (PH)	Ground (PE)
Collector KESR 32-55 F/18							157274	157275

KESR 32-55 S (Bolted connection) Max. ampacity: 1 bolted connection 32A – AEA 2,5 | 40A – AEA 4,0 | 55A – AEA 6,0

Type ⁽¹⁾	Poles	a mm	b mm	c mm	Weight kg	Base plate	Order No. with PE -HS	without PE -ST
KESR 32-55 S- 3-18	3	54	79	–	0.405	4 poles (No. 4 = free)	157220	157225
KESR 32-55 S- 4-18	4	54	79	–	0.476	4 poles	157221	157226
KESR 32-55 S- 5-18	5	80	115	53	0.547	6 poles (No. 6 = free)	157222	157227
KESR 32-55 S- 6-18	6	80	115	53	0.618	6 poles	157223	157228
Separately available Single Collectors:							Phase (PH)	Ground (PE)
Collector KESR 32-55 S/18							157294	157295

Adapter for compact collectors assembled collectors with adapter on request.

Type	Poles	a, mm	b, mm	c, mm	Weight, kg	Order No.
AD4 - KESR/KESL	4	79	35	54	0.210	157368
AD6 - KESR/KESL	6	115	65	80	0.310	157367
AD8 - KESR/KESL	8	151	100	120	0.410	157432

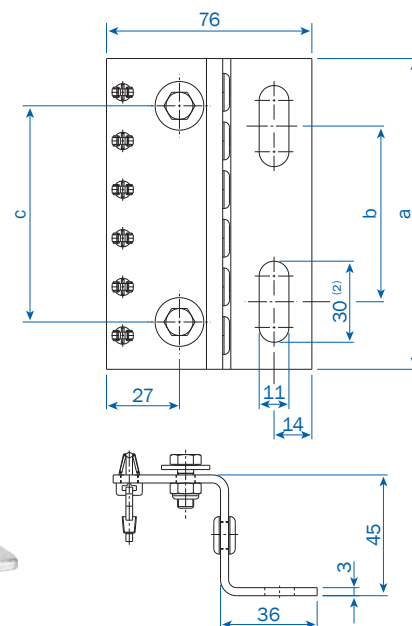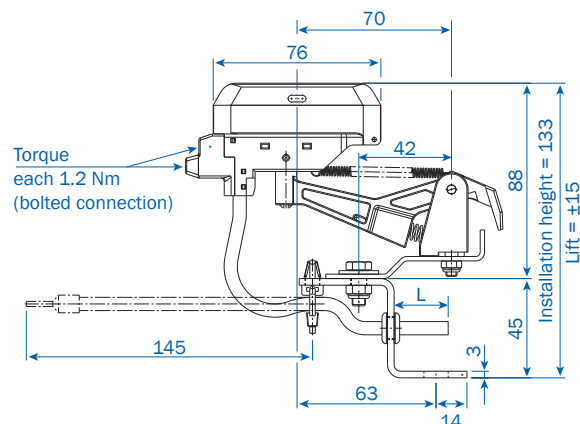

(1) Types to be completed e.g. KESR 32-55 S-4-18 with PE and bolted connection → KESR 32-55 S-4-18 HS Order No. 157221.

(2) 25 at AD4 - KESR/KESL

CURRENT COLLECTOR KESL 32-55

Two-way conveying, long arm

Max. ampacity: 1 flat plug connection 32 A – FLA 2,5
40 A – FLA 4,0
55 A – FLA 6,0


Phase distance 18 mm

Lift and swivel deflection ± 30 mm

Contact pressure: ca. 7 N per carbon

PE on No. 4, with 3-poles on No. 3, other arrangements possible

PE is first contact while entering conductor rail

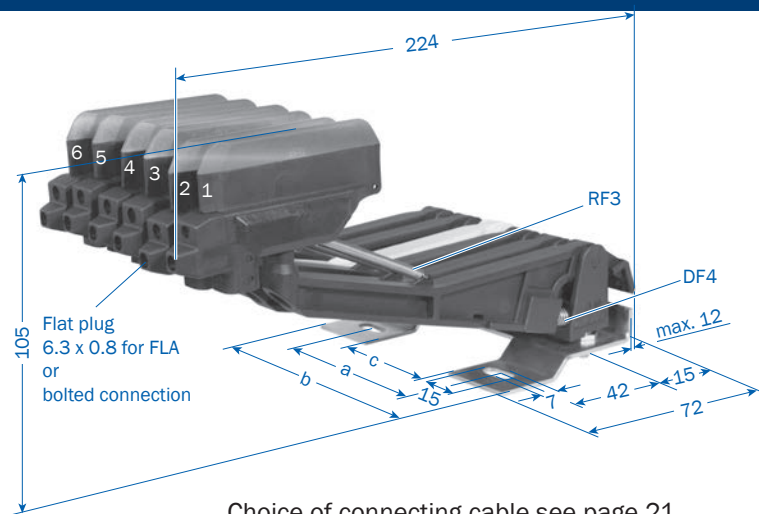

Choice of connecting cable see page 21

KESL 32-55 F (Flat plug connection)



Type ⁽¹⁾	Poles	a mm	b mm	c mm	Weight kg	Base plate	Order No. with PE -HS	without PE -ST
KESL 32-55 F- 3-18	3	54	79	–	0.438	4 poles (No. 4 = free)	157199	157300
KESL 32-55 F- 4-18	4	54	79	–	0.517	4 poles	157200	157301
KESL 32-55 F- 5-18	5	80	115	53	0.596	6 poles (No. 6 = free)	157201	157302
KESL 32-55 F- 6-18	6	80	115	53	0.675	6 poles	157202	157303
Separately available Single Collectors:							Phase (PH)	Ground (PE)
Collector KESL 32-55 F/18							157188	157189

KESL 32-63 S (Bolted connection) Max. ampacity: 32 A – AEA 2,5 | 40 A – AEA 4,0 | 55 A – AEA 6,0 | 63 A – AEA 10,0

Type ⁽¹⁾	Poles	a mm	b mm	c mm	Weight kg	Base plate	Order No. with PE -HS	without PE -ST
KESL 32-63 S- 3-18	3	54	79	–	0.451	4 poles (No. 4 = free)	157190	157296
KESL 32-63 S- 4-18	4	54	79	–	0.537	4 poles	157191	157297
KESL 32-63 S- 5-18	5	80	115	53	0.623	6 poles (No. 6 = free)	157192	157298
KESL 32-63 S- 6-18	6	80	115	53	0.709	6 poles	157193	157299
Separately available Single Collectors:							Phase (PH)	Ground (PE)
Collector KESL 32-63 S/18							157186	157187

Adaptor for compact collectors assembled collectors with adapter on request.


Type	Poles	a, mm	b, mm	c, mm	Weight, kg	Order No.
AD4 - KESR/KESL	4	79	35	54	0.210	157368
AD6 - KESR/KESL	6	115	65	80	0.310	157367
AD8 - KESR/KESL	8	151	100	120	0.410	157432

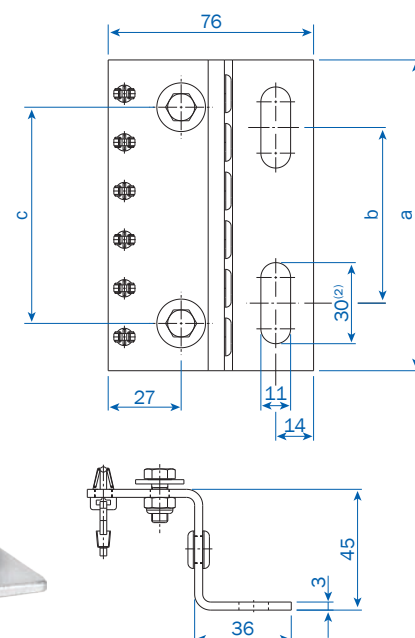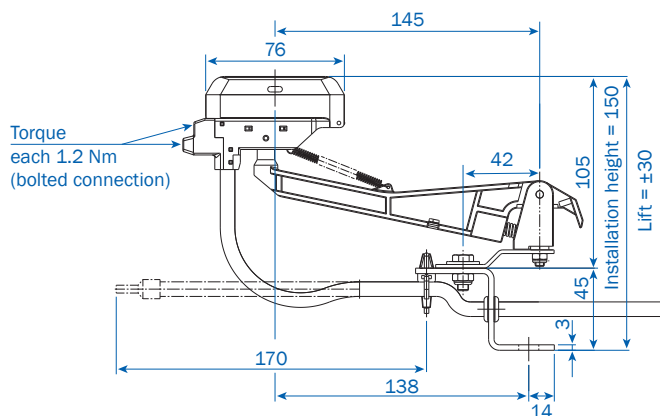

(1) Types to be completed e.g. KESL 32/63 with PE and bolted connection R KESL 32-63 S-4-18 HS Order No. 157191.

(2) 25 at AD4 - KESR/KESL

EXPANSION SECTIONS

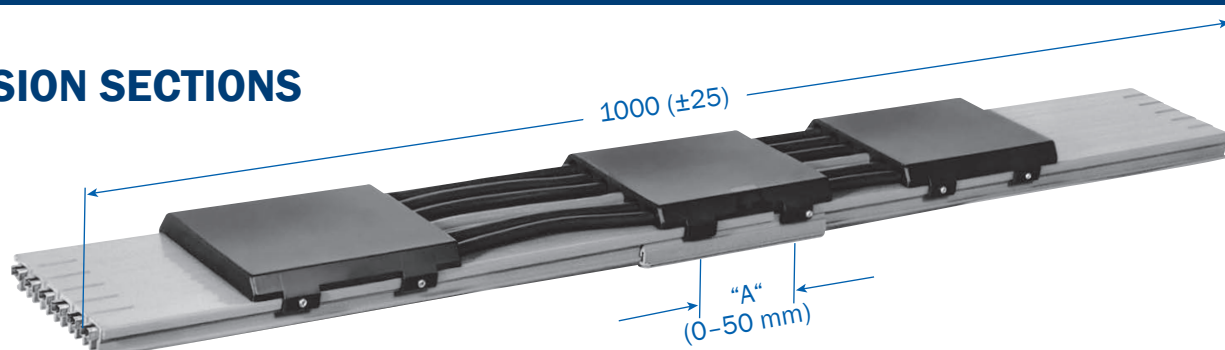


Type ⁽³⁾	Weight kg	Order No. (with PE) HS	Order No. (without PE) SS	Type ⁽³⁾	Weight kg	Order No. (with PE) HS	Order No. (without PE) SS
DVKS 3/ 63	1.900	153230	153240	DVKS 5/ 63	3.266	152340	152380
DVKS 3/ 100	2.090	153250	150551	DVKS 5/ 100	3.586	152350	150554
DVKS 3/ 120	2.215	153623	150552	DVKS 5/ 120	3.811	153633	150555
DVKS 3/ 140	2.346	156588	156589	DVKS 5/ 140	4.030	156596	156597
DVKS 4/ 63	2.412	150480	150510	DVKS 6/ 63	3.582	152360	152390
DVKS 4/ 100	2.622	150490	150516	DVKS 6/ 100	3.962	152370	150556
DVKS 4/ 120	2.852	153628	150553	DVKS 6/ 120	4.242	153638	150557
DVKS 4/ 140	3.027	156590	156595	DVKS 6/ 140	4.504	156598	156599

Application

Expansion sections are required to compensate for expansion and contraction in system expansion gaps (building or track). The expansion capacity is 50 mm. More tolerance require more than one VKS expansion section. They do not interrupt electrical power, so there is no need for an extra feeding. Expansion joints do not influence the voltage drop of a system.

Mounting

The expansion section is installed in the center between two fix points in the building/track expansion gap area. The gap dimension "A" equals the gap of the building/track. The remaining conductor rail is laid according to the installation instructions.

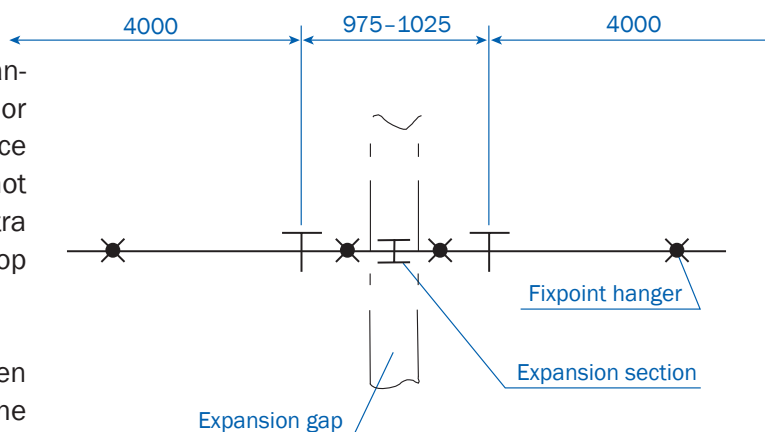


CONDUCTOR DEAD SECTIONS / SECTIONALIZING

The use of insulating section separations is limited to sectioning of equal potentials/voltages and low energies (e.g. control signals).

⁽¹⁾ Position of the conductor dead section and item number of the conductor profile which has to be separated have to be advised.

Type	Order No.	Color
VSTS 1/10-63 M	156933	black
VSTS 1/100 M	150150	black
VSTS 1/120 M	151674	black
VSTS 1/140 M	156335	black

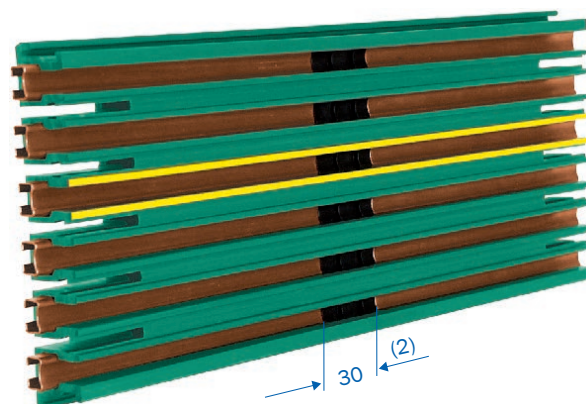

(1) Description of conductor profiles see page 7-9.

(2) Length of the currentless track (longer designs on request).

(3) Types to be completed e.g. KSTU 30 R KSTU 30 PH Order No. 152087

ACCESSORIES FOR CURRENT COLLECTORS

Connecting cable FLA

High flexible for collectors with flat plug connection
(Arrangement to different collector types according to pages 18 and 19.)

Operating conditions $-15^{\circ}\text{C} \dots 70^{\circ}\text{C}$




Type	Cross section mm ²	Outer-Ø mm	Wgt. kg	Order No. Phase black	PE green/yellow
FLA 2,5	2.50	4.00	0.080	165049	165050
FLA 4	4.00	6.00	0.100	165051	165052
FLA 6	6.00	7.00	0.150	166368	166369

Connecting cable AEA

High flexible for collectors with Bolted connection
(Arrangement to different collector types according to pages 18 and 19.)

Operating conditions $-15^{\circ}\text{C} \dots 70^{\circ}\text{C}$

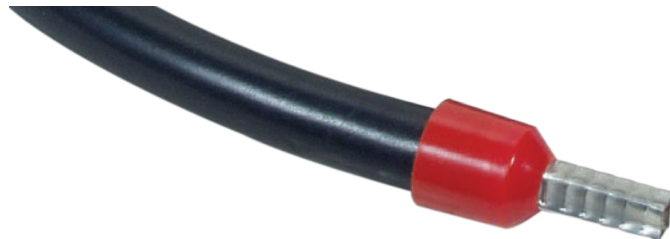


Type	Cross section mm ²	Outer-Ø mm	Wgt. kg	Order No. Phase black	PE green/yellow
AEA 2,5	2.50	4.00	0.038	143080	143079
AEA 4,0	4.00	6.00	0.063	143078	143077
AEA 6,0	6.00	7.00	0.085	143076	143075
AEA 10,0	10.00	8.50	0.160	143074	143073


Towing arm

for current collectors with Ground/PE
KSTU 30/55 see page 17

for control collectors without Ground/PE
KSTU 30/55 see page 17

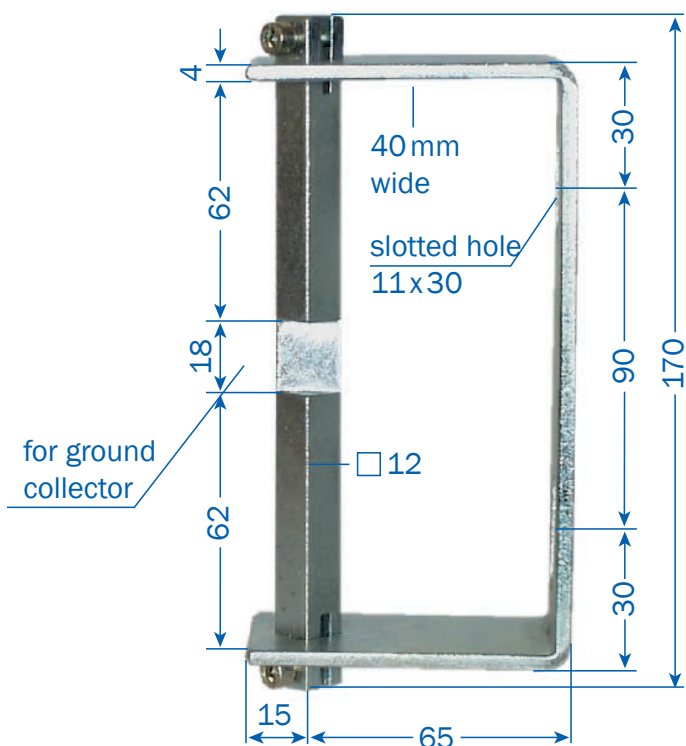


Type	Weight kg	Order No.
UMAS 12 HS-B	0.600	152232

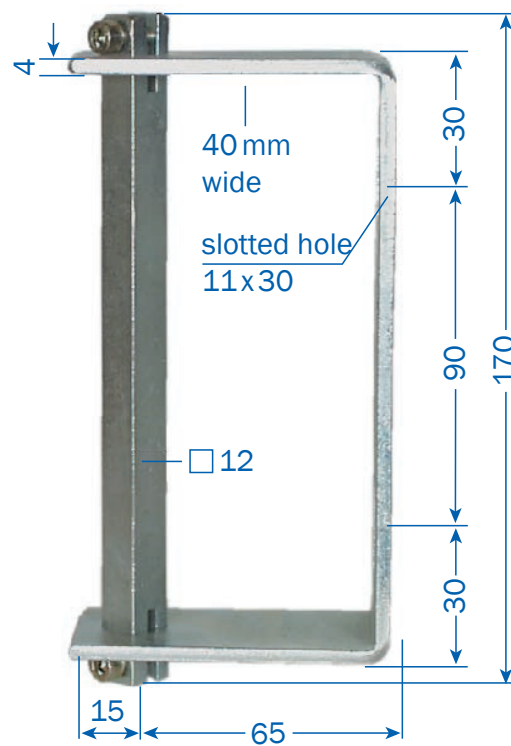


Type	Weight kg	Order No.
UMAS 12 ST	0.600	152234

SPARE PARTS FOR CURRENT COLLECTORS


Brush KMK 30-55 PH

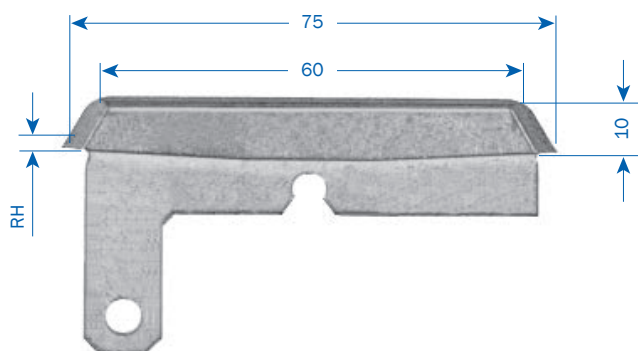


Brush KMK 30-55 PE

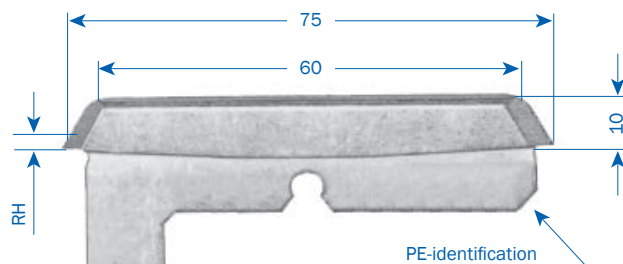

Brush KMKU 25/18⁽¹⁾

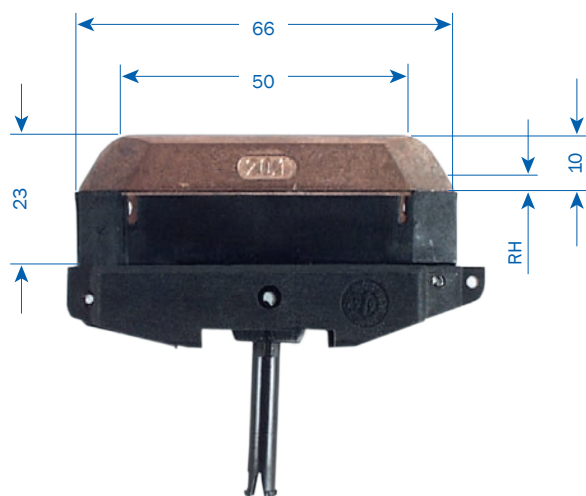


Brush MK 55, MK 63

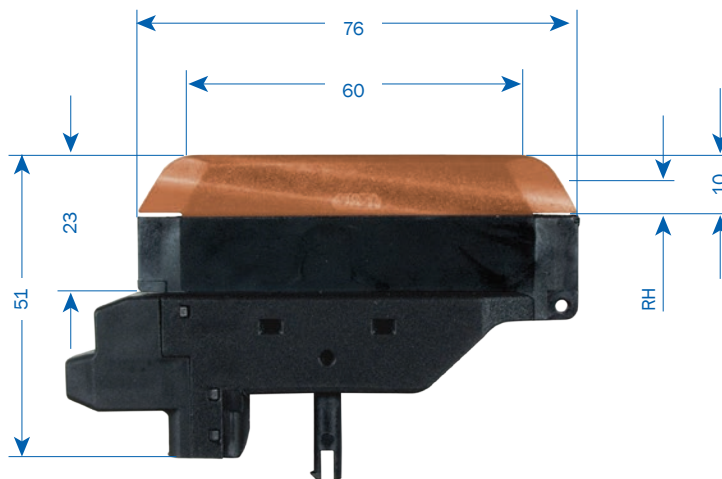


Type	For collectors	Thickness of brush	RH mm	Weight kg	Order No.
KMK 30-55 PH	KSTU 30-55	4.40 mm	4.00	0.031	154440
KMK 30-55 PE	KSTU 30-55	4.40 mm	4.00	0.034	154453
KMKU 25/18	KSFU 25	4.20 mm	3.50	0.035	155002
MK 55 F/18	KESR 32-55 F, KESL 32-55 F	4.20 mm	3.50	0.044	157308
MK 63 S/18	KESR 32-55 S, KESL 32-63 S	4.20 mm	3.50	0.053	157309

Dimension RH = allowed rest height

Pressure spring DF

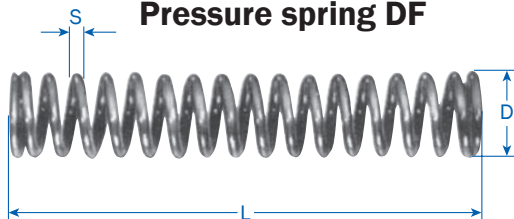

Tension spring RF

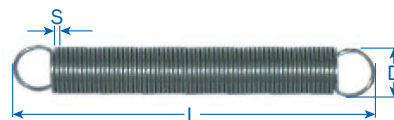


Type	For collectors	S mm	D mm	L mm	Order No.
DF 2	KSFU25, KESR 32-55	0.90	7.70	43.00	153848
RF 3	KSFU 25, KESR 32-55, KESL 32-63	0.40	4.40	31.00	153849
DF 4	KESL 32-63	1.10	6.40	41.00	157312

(1) 18 mm wide

SPARE PARTS FOR COLLECTORS KSTU 30-55


Type	Order No.		Weight kg	Order No.
1	Brush	Phase	0.031	154440
2	Brush	PE	0.031	154453
3	Collector arm KSTU, complete	Phase	0.083	152275
4	Collector arm KSTU, complete	PE	0.083	152276
5	Cover cap	Phase (black)	0.002	152291
6	Cover cap	PE (green)	0.002	152292
7	Distance spacer for KSTU 30-55		0.003	152293
8	Connecting cable RKA 2,5 PH, 2 m long	Phase	0.150	154447
	Connecting cable RKA 2,5 PE, 2 m long	PE	0.150	154448
8	Connecting cable RKA 6 PH, 2 m long	Phase	0.260	154449
	Connecting cable RKA 6 PE, 2 m long	PE	0.260	154450
9	Connecting screw		0.002	152658

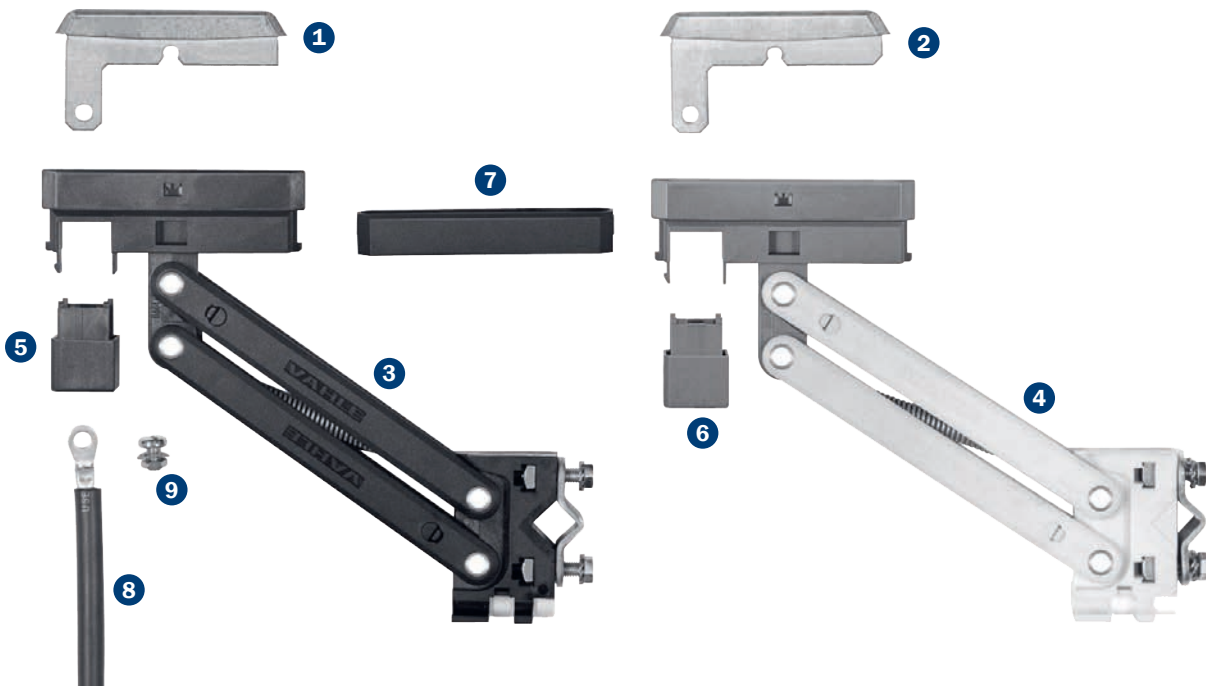

GENERAL SPARE PARTS

Type	Order No.
Joint cap for VKS 3	152012
Joint cap for VKS 4	152013
Joint cap for VKS 5 und 6	152014
Plug-in connector (1 pole, copper) for VKS.../ 10-100 A	153803
Plug-in connector (1 pole, copper) for VKS.../120-140 A	152672
Insulating piece for sectionalizing (1 pole) VSTS 1/63 L	156934
Insulating piece for sectionalizing (1 pole) VSTS 1/100 L	150419
Insulating piece for sectionalizing (1 pole) VSTS 1/120 L	151669
Insulating piece for sectionalizing (1 pole) VSTS 1/140 L	156336
Feed terminal, (1 pole) for line feed VNS	151774
Feed terminal, (1 pole) for line feed VLS	153603

MOUNTING BRACKETS

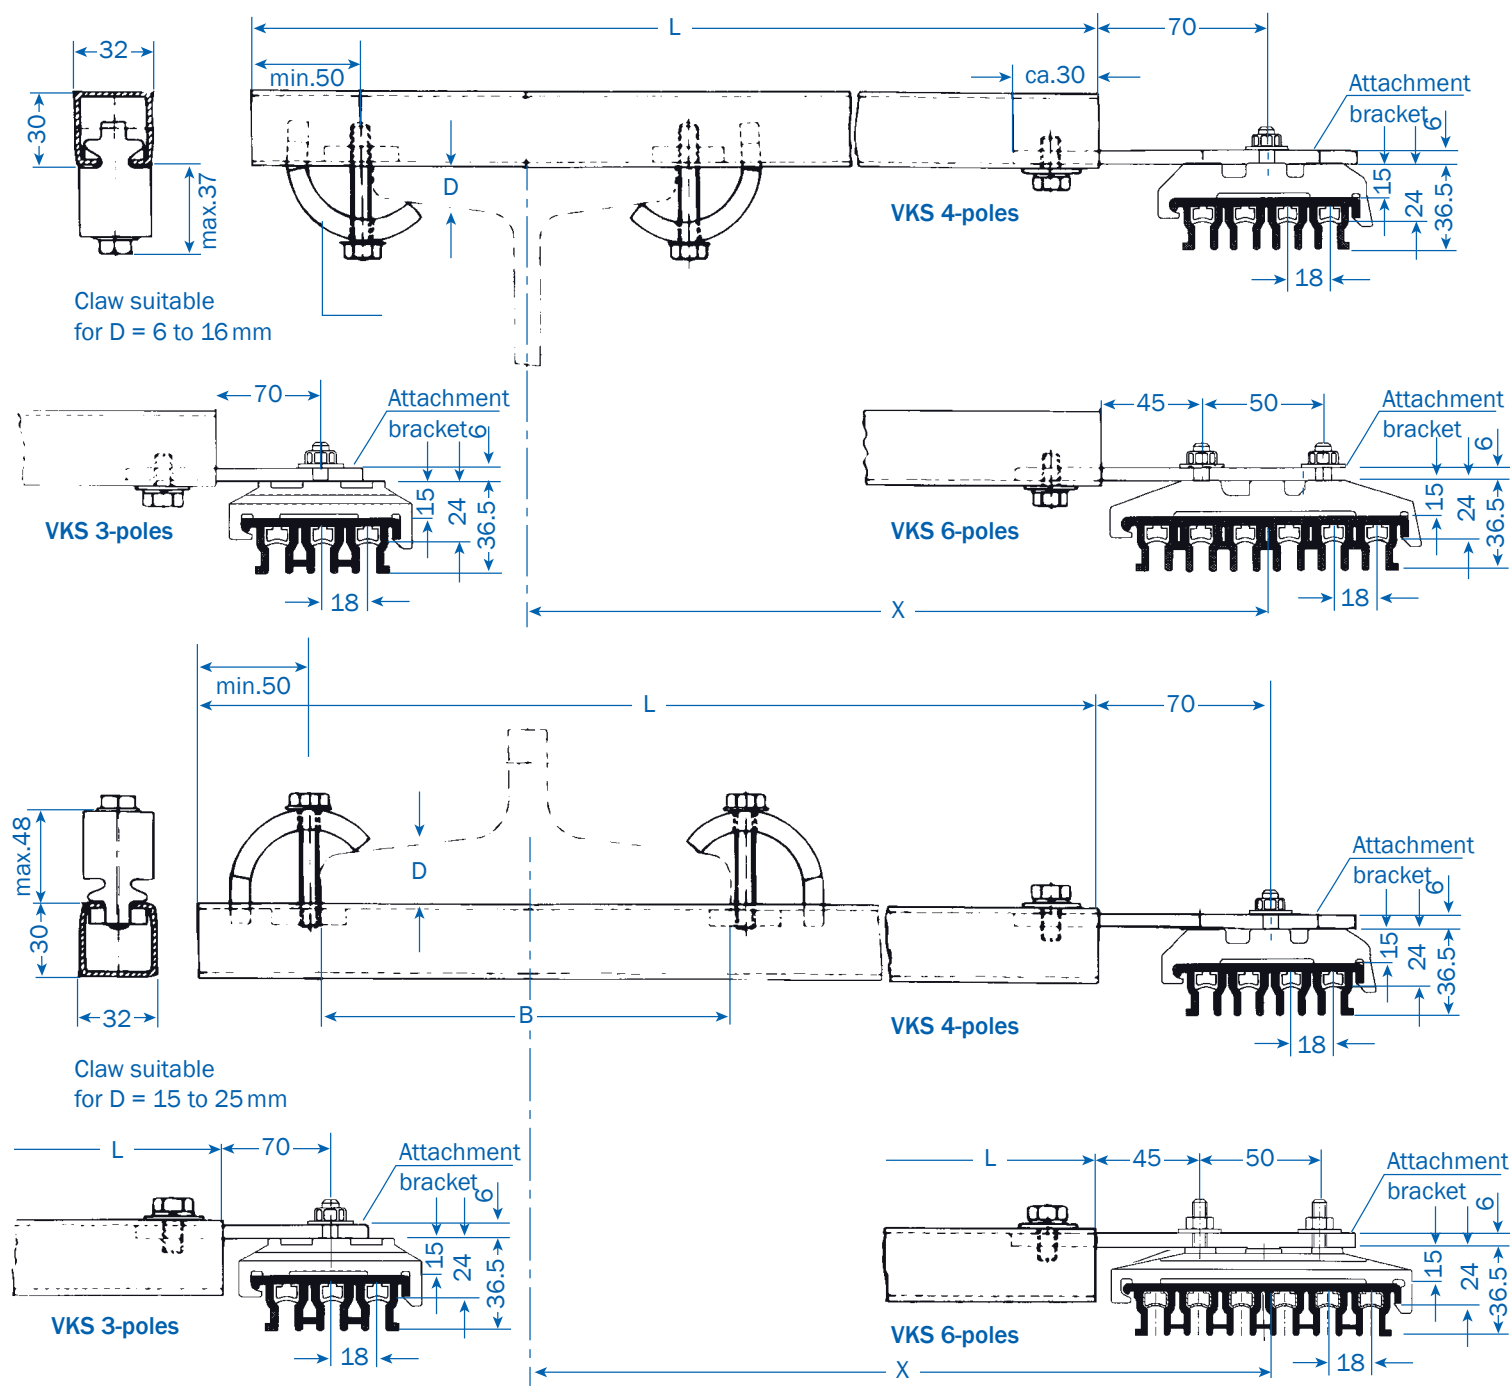

Attention!

Make sure that hoist wheels of monorail systems have enough clearance.


C-rail of HKV is identical to type S1 for cable carriers (catalog 8a). Hangers to be ordered separately.

The corresponding beam width (B_{max}) can be increased up to approx. 300 mm by reducing X.


Type ⁽¹⁾	X, mm	L, mm	B_{ma} , mm	Weight, kg	Order No.
HK ... 200	200	300	90	0.920	150600
HK ... 250	250	350	180	0.970	150610
HK ... 300	300	400	230	1.020	150620
HK ... 400	400	500	230	1.120	150630
HK ... 500	500	600	230	1.220	150640
HK ... 600	600	700	230	1.320	150650
HK ... 700	700	800	230	1.420	150660
HK ... 750	750	850	230	1.470	150670
HK ... 800	800	900	230	1.560	150680

(1) Please complete types e.g. for VKS → HKVKS 200


SNAP-ON BRACKETS

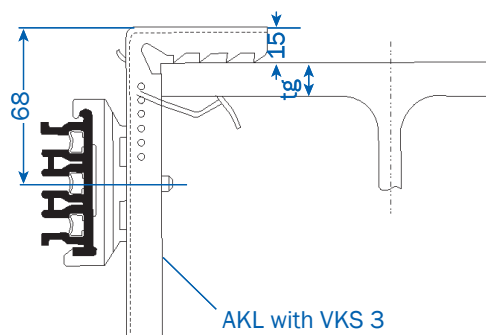

AKL with VKS 3

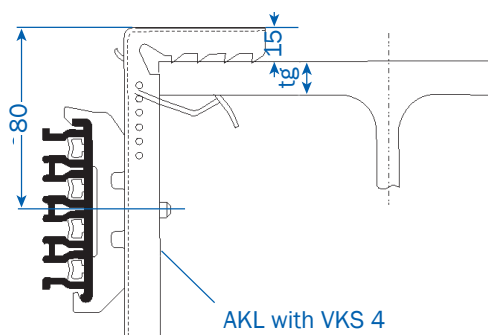

AKL with VKS 4

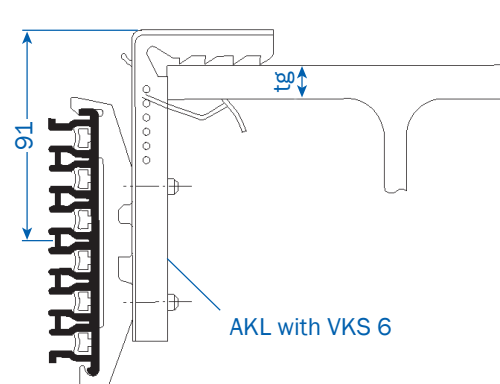

AKL with VKS 6

Snap-on brackets facilitate installation of conductor system on flat flange beams IPE-, IPB-, IPBI- and IPBv. They are adjustable to suit beam flange dimensions (tg) of up to 43 mm.




Type	AKL					
Beam flange tg/mm	8-13	14-19	20-25	26-31	32-37	38-43
Weight/kg	0.184					
Order No.	151925					

7-POLE VKS SYSTEM FOR HIGH-BAY WAREHOUSES

This system combines a VKS 4-pole and VKS 3-pole conductor rail in a common hanger clamp.

Possible fixing methods are shown below. All available VKS 4-pole and VKS 3-pole conductor systems can be combined. All standard components of VKS conductor system can be used. Restrictions apply to line feeds VNS, end feeds VEKS, transfers and towing arms (consult factory for these components).

Fixpoint hanger VEPS and sliding hanger VAS

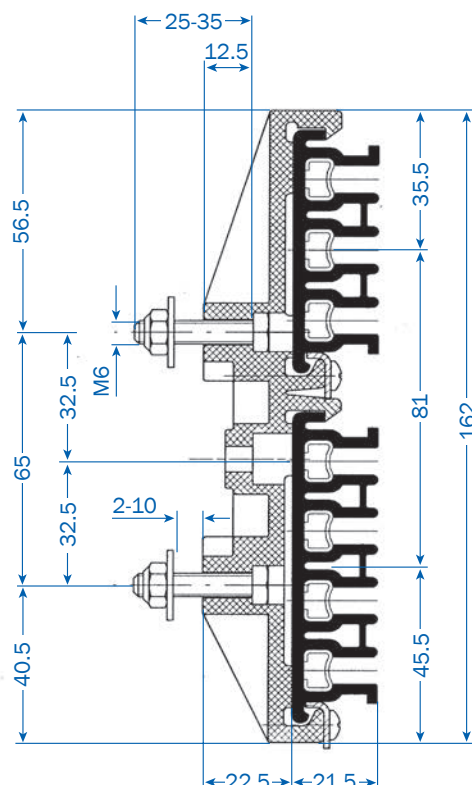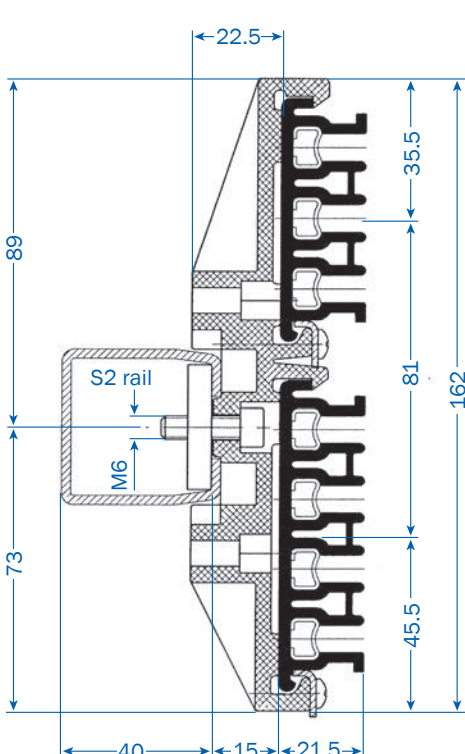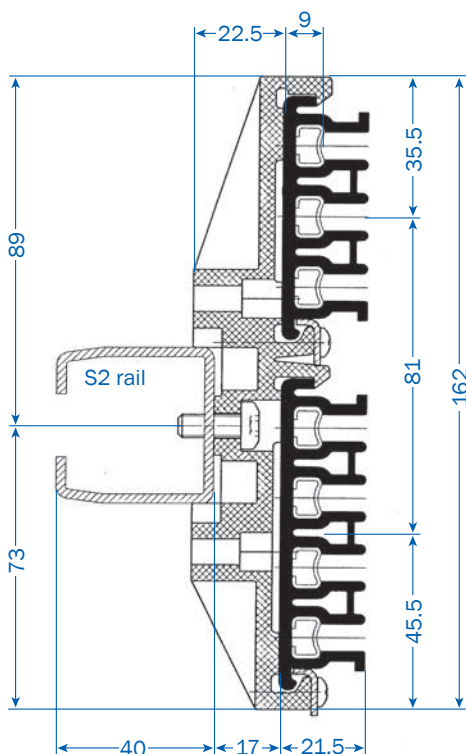

Type	Wgt. kg	Order No.
VEPS 4/3 SF M 6x16	0.100	156114
VAS 4/3 SF M 6x16	0.080	156115

Type	Wgt. kg	Order No.
VEPS 4/3 GP M 6	0.121	156116
VAS 4/3 GP M 6	0.101	156117


Type	Wgt. kg	Order No.
VEPS 4/3 M 6x35	0.119	156772
VAS 4/3 M 6x35	0.099	156089

EXAMPLES OF ORDERS

Example 1. Straight track with end feed⁽¹⁾

Length = 12 m

System type VKS 3/100 HS

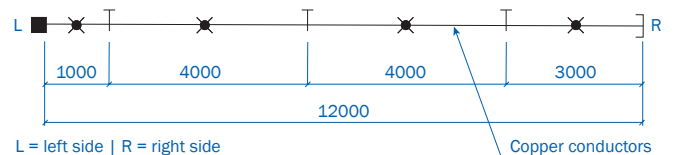


#	Description	Type	Order No.	Qty
1	Conductor rail, L=4m	VKS 3/100-4 HS	153904	2
2	Conductor rail, L=3m	VKS 3/100-3 HS	153903	1
3	Conductor rail, L=1m	VKS 3/100-1 HS	153901	1
4	Joint material	SVN 3/63-100	156533	3
5	Fixpoint hanger	VEPS 3	153070	4
6	Sliding hangers	VAS 3	153060	10
7	End cap	VES 3	153080	1
8	End feed	VEKS 3/10-120 L	156422	1
9	Collector	KESR 32-55F-3-18 HS	157285	1
10	Tow arm	-	-	-
11	Support bracket	HKVKS 300	150620	14

Example 2. Curved track with switch (lateral mounting)⁽¹⁾

Length = 27.857 m

System type VKS 6/63 HS

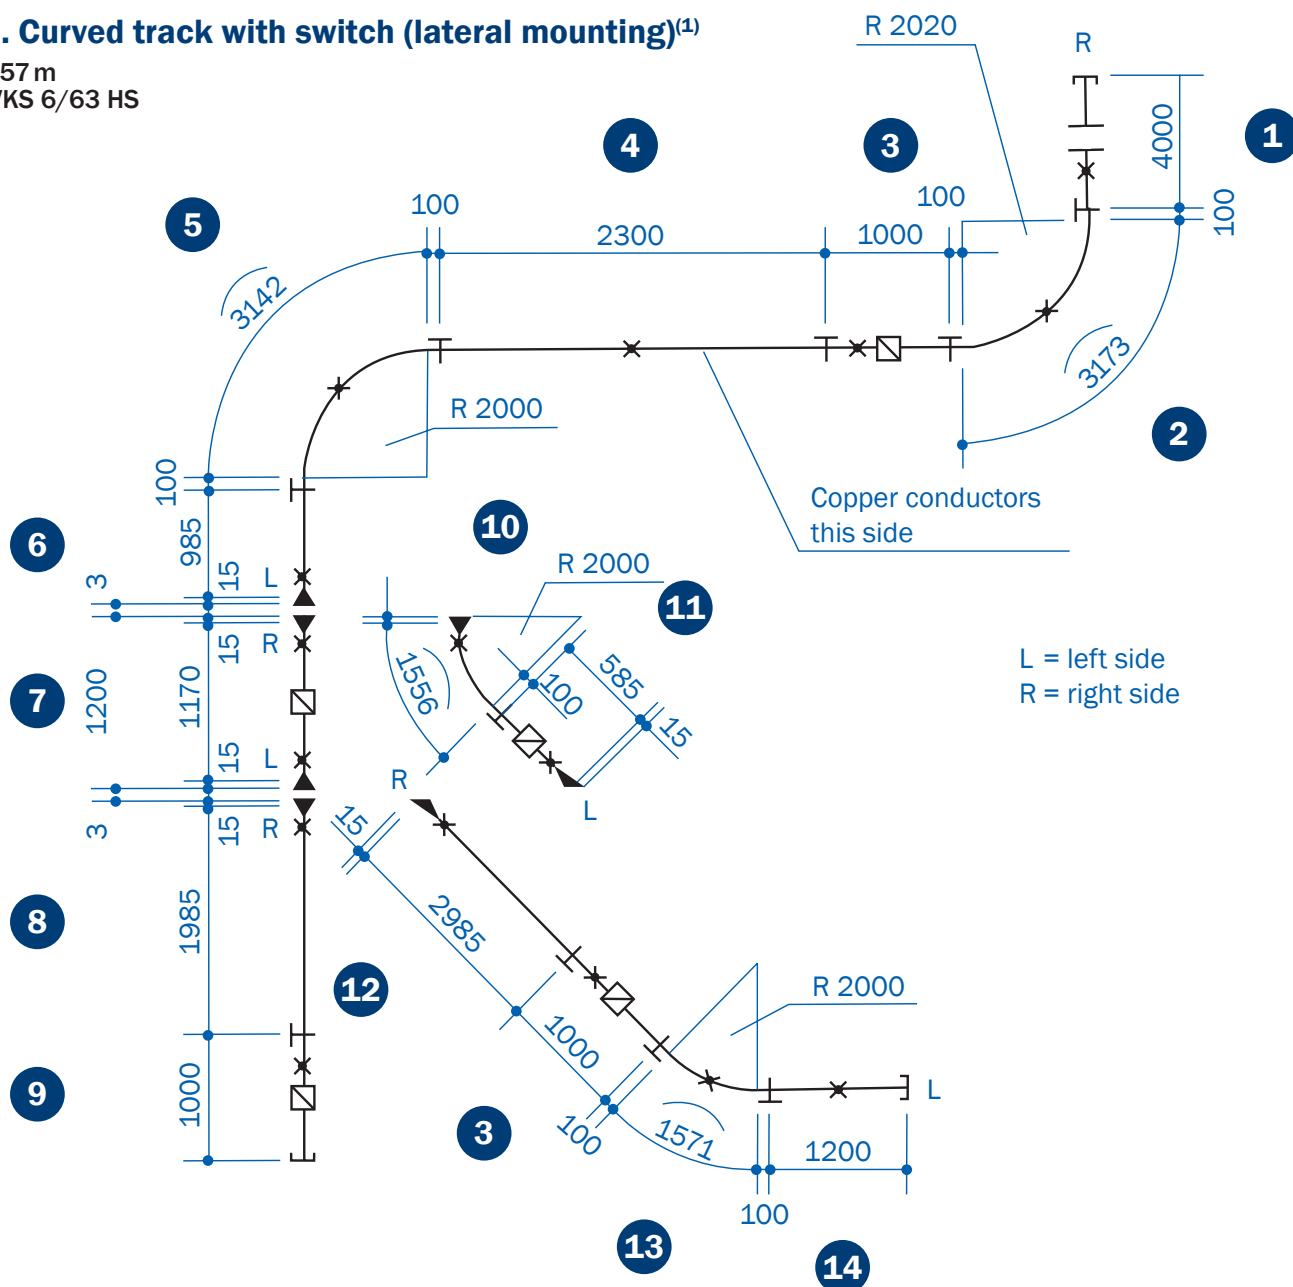

(1) For layout symbols see page 6.

EXAMPLES OF ORDERS

Example 2. Curved track with switch (lateral mounting). See the drawing on page 26.

Length = 27.857 m

System type VKS 6/63 HS

#	Description	Type	Order No.	Qty	Position
1	Conductor rail, L=4m	VKS 6/63-4 HS	154194	1	1
2	Conductor rail, L=3m cut to: 1x 2.985 m 1x 2.300 m	VKS 6/63-3 HS	154193	2	12 4
3	Conductor rail, L=2m cut to: 1x 1.985 m 1x 1.200 m 1x 1.170 m	VKS 6/63-2 HS	154192	3	8 14 7
4	Conductor rail, L=1m	VKS 6/63-1HS	154191	3	3 9
5	Conductor rail, L=1m cut to: 1x 0.985 m 1x 0.585 m	VKS 6/63-1 HS	154191	2	6 11
6	Conductor rail, L=4m 1x for outside curve 90°; R = 2020 mm; L = 3.373 m 1x for inside curve 90°; R = 2000 mm; L = 3.342 m	VKS 6/63-4 HS	154194	2	2 5
7	Conductor rail, L=2m 1x for inside curve ~ 45°; R = 2000 mm; L = 1.656 m 1x for inside curve 45°; R = 2000 mm; L = 1.771 m	VKS 6/63-2 HS	154192	2	10 13
8	Bending surcharge (outside curve)		152100	1	
9	Bending surcharge (inside curve)		153722	3	
10	Joint material	SVN 6/63-100	156539	10	
11	Fixpoint hangers	VEPS 6	152120	16	
12	Sliding hangers	VAS 6	152130	22	
13	End caps on above position. 1, 9, 14	VES 6-M	152021	3	
14	Line feeds installed on position 3, 7, 9, 11	VLS 6/63	156945	2	
15	Transfer guides, left installed on Pos. 6, 7, 11	VU 6 S-M	153801	3	
16	Transfer guides, right installed on Pos. 7, 8, 10, 12	VU 6 S-M	153802	4	
17	Compact collector, Ground on No. 3	KESR 32-55S-6-18 HS	157223	1	

For a free quote, please submit your inquiry in your preferred format, including any relevant drawings and sketches.

sales.usa@vahle.com, Phone: +1 713.465.9796, Fax: +1 713.465.1851



Try VAHLE CUSTOMER HUB for calculation, quoting and ordering! Request access today!
<https://customerhub.vahle.de/>

Download related catalogs, operation manuals, and more at
<https://www.vahle.com/en/download>





VAHLE, Inc.

**407 Cane Island Parkway
Katy, Texas 77494, USA**

**Phone: +1 713.465.9796
Fax: +1 713.465.1851**

**sales.usa@vahle.com
www.vahle.com**

**You can find your local contact at:
www.vahle.com/contact**