


MKHF | MKHS | MKHD

ENCLOSED CONDUCTOR SYSTEM

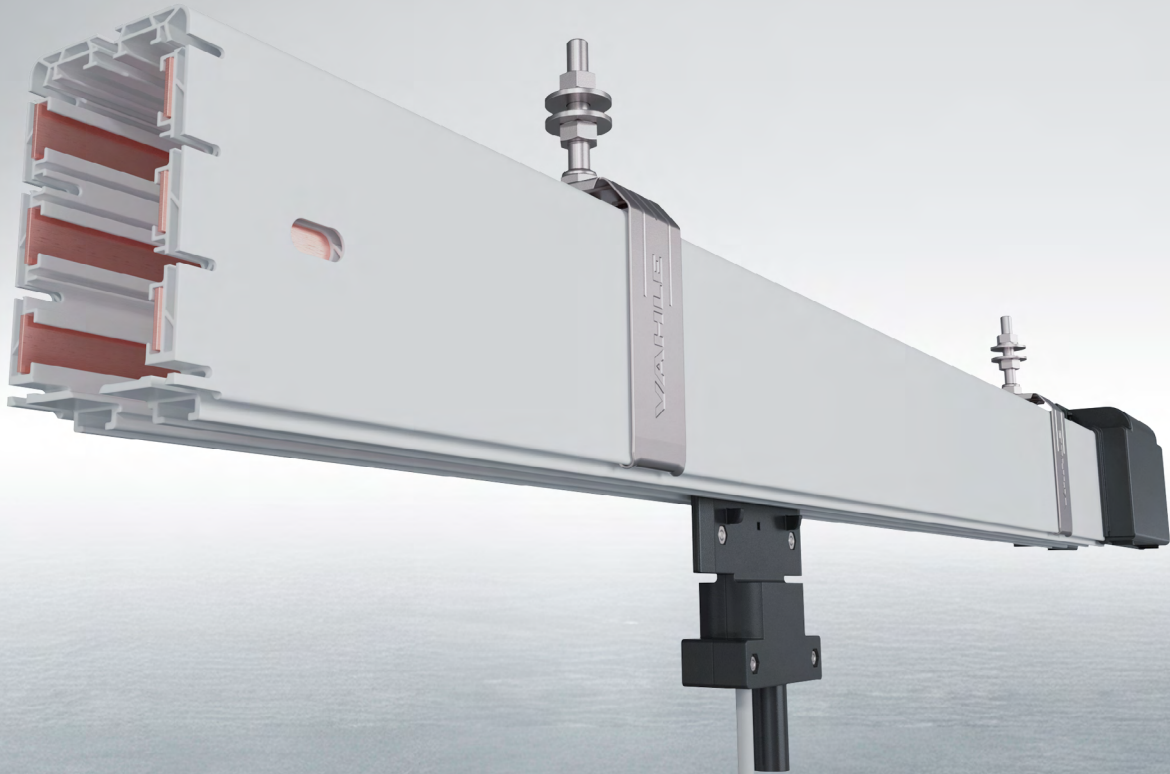

ENCLOSED CONDUCTOR SYSTEM MKH

Content

Enclosed conductor system MKH	2	Maintenance sections	23
Description of the conductor system	2	Conductor dead sections.....	24
Technical data	3	Anti-condensation sections	25
Technical data and standard sections.....	6	Expansion sections	26
Types and order numbers.....	7	Current collectors.....	28
Hangers and end sections.....	8	Tow arms.....	31
Jointing material and end feeds.....	9	Flat copper and cable glands.....	32
Line feeds	10	Assembling tools	33
Curved sections and sealing strips.....	13	Example for ordering.....	34
Mounting brackets	14	Spare parts.....	35
Heating	16	Embedded positioning system APOS M.....	36
Contact sections, Turntables and Switches	18	POWERNET - EtherNet/IP over conductor system	23
Entry funnel	19	Questionnaire	38
Transfer guides.....	20	Application Examples.....	39
Collector removal sections	22		

Description of the conductor system

The VAHLE conductor system MKH... is a totally enclosed conductor system for indoor and outdoor use. The insulated housing can accommodate different copper sections.

- Type **MKHD** 6-pole up to 10-pole conductor version, continuous copper strips from 63 to 160 A
(copper strips come as separate items as coils).
- Type **MKHF** 6-pole up to 8-pole conductor version, with pre-assembled copper conductors and spring loaded connectors from 63 to 100 A.
- Type **MKHS** 6-pole up to 8-pole conductor version, with pre-assembled copper conductors and bolted joints from 63 to 200 Amperes.

A compact design, corrosion resistance and easy installation are the main characteristics. The MKH complies with VDE, European and international standards as well as accident prevention regulations. It is protected to IP 23 standards. The MKH can be supplied with sealing strip and heating system. The conductor system with sealing strip is protected to IP 24 standards and EN 60529 (0470, part 1) regulation.

Collectors are safe against touch only when fully entered into the conductor system. If there is the possibility to touch live parts by hand, i.e. collectors that might leave the power rail during operation, provide safety barrier or disconnect mains. This is valid only for a supply voltage exceeding 24 VAC or 60 VDC.

Cross-sections other than those shown on pages 5 and 6 are possible. If the cross-section of the N-conductor is smaller than the cross-section of the outer conductor, it is necessary to protect it against overcurrent and short circuit, design according to IEC60364-4-43 (HD 60364-4-43).

Low voltages of max. 50 V AC or 120 V DC are valid if the conductor system is only used as control line (type...SSD). Refer to regulation SELV or PELV (also DIN VDE 0100-410). A ground conductor is required for higher voltages.

Applications

Mobile power feeding of overhead cranes, monorail systems, electric hoists, electric power tools, machine tools, automated storage and retrieval systems, assembly and test lines, hangar doors, studio and station lighting systems and many others.

Approvals

UL-approved

Housing

Color grey, plastic housing for 6 to 10 conductors.

Standard section 4 m. Other sections are available. The ground conductor is identified by international color code. Phase reversing prevented by design of the collector and housing.

Higher number of conductors possible by combination of several conductor systems.

TECHNICAL DATA

Couplings

Through plastic joint caps.

Feed sets

Through line feeds or end feeds.

When selecting the “overload” protection devices, selection has to be made according to DIN VDE 0100 part 530.

Continuity of the ground conductor

The continuity of the ground conductor has to be guaranteed as per regulation EN60204-32 for conductor rails.

Runways of lifting devices may not be used as ground conductor, only an additional connection is permissible. Therefore a continuous ground conductor is required.

End sections

End section incl. end cap for MKHD and end caps for MKHF and MKHS.

Hangers

The brackets are installed to the crane track (see page 14).

The conductor rails are located in sliding and fixpoint hangers.

Max. support distance with the following ambient temperatures:

- Indoor systems and covered outdoor systems:
 $\leq 35^{\circ}\text{C} = 2.00\text{ m}$
- Indoor and outdoor systems
 with and without heating: $> 35^{\circ}\text{C} = 1.33\text{ m}$
- Cold and frozen storage warehouses: $\leq 0^{\circ}\text{C} = 1.33\text{ m}$

It is necessary to provide at least one additional hanger on the sections of the feeds (line feeds), removing sections, anti-condensation sections and expansion sections (1 m sections). This prevents any sagging of the conductor system.

Expansion during temperature fluctuation

Housing-expansion section without electrical isolation for MKHD.
 Expansion section (Housing and Cu) without electrical isolation for MKHF and MKHS.

Anti-condensation sections

For combined indoor/outdoor applications use anti-condensation sections. They do not interrupt electric conductors.

Contact sections, turntables, switches

Conductor systems with entry funnels or transfer guides (see pages 18–21).

Sectionalizing

Conductor dead sections are electrical interrupts of the conductor. Under normal operating conditions a cross over with collectors to switch the voltage off or on is only allowed with low power ratings (control current). The conductors can be separated through air gaps (5 mm) or insulating pieces (35 mm). With the air gap the collector carbon bridges the gap, e.g. for mains. The insulating piece is longer than the carbon and each conductor rail section can be separated electrically, e.g. for control.

Double isolating sections are recommended to guarantee safely separated conductor sections as per EN 60204.

Collectors

The current collectors are made of re-enforced polyester fiber-glass, for high strength and light weight. Spring loaded carbon brushes maintain uniform contact. Connecting cables and hinged or flexible towing arms included.

The length of the connecting cable may not exceed 3 m if the added overload protection device is not designed for the load capacity of this cable. Refer also to regulation VDE 0100, part 430 and EN 60204-32. (Note: this occurs often with several collectors per system).

With following system requirements double collectors have to be used

- as proper measure to fulfil the continuity of the ground conductor system via carbon brushes. Refer to regulation DIN EN 60204-1:2007-06 and DIN EN 60204-32:2009-03
- Transfers with switches and turntables
- Operational voltage below 50 V
- Frequency controlled drives
- Transmission of signals
- High electrical loads

PLEASE NOTE

For use in galvanizing and pickling plants, under aggressive conditions and low voltage applications we would appreciate receiving detailed information, especially of the environmental conditions.

For quotations and order processing including Power rail systems with curves, dead sections, turntables, switches etc. we require your drawings or sketches. Please use our questionnaire, page 38.

TECHNICAL DATA

Conductor system values: electrical data

Max. continuous current	Nominal voltage (UL)	Dielectric strength	Spec. resistance	Surface resistance	Leakage resistance
200 A (with 80 % ED)	690 V (600 V)	IEC 60243 30–40 kV/mm	IEC 60093 $5 \times 10^{15} \Omega/\text{cm}$	IEC 60093 $10^{13} \Omega$	EN 60112 CTI 400-2.7

Conductor system values: mechanical data

Flexible strength	Tensile strength	Ambient temperature	Flammability	Resistance to chemicals (at 45 °C)
75 N/mm ² ±10 %	40 N/mm ² ±10 %	–30 °C up to +60 °C	flame retardant, self extinguishing, UL 94 V0	Gasoline, mineral oil, grease, acid sulfur up to 50 %, caustic soda up to 25 % and hydrochloric acid up to 50 %, concentrated

Correction factor f_T

Ambient temperature °C	35 °C	40 °C	45 °C	50 °C	55 °C	60 °C
Correction factor f_T Standard shrouding	1	0.95	0.89	0.84	0.77	0.71

Voltage drop for the conductor

For three-phase current

$$\Delta U = \sqrt{3} \cdot I \cdot I_A \cdot Z$$

Z = impedance [Ω/km]

For alternating current

$$\Delta U = 2 \cdot I \cdot I_A \cdot Z$$

R = resistance [Ω/km]

l = feed length [km]

For direct current

$$\Delta U = 2 \cdot I \cdot I_A \cdot R$$

Permissible continuous current of the conductor

$$I_{Dzul,UT} = I_{zul} \times f_T[A] \text{ mit } I_{Dzul,UT} > I_{DA}$$

$I_{Dzul,UT}$ = permissible continuous current at ambient temperature


I_{zul} = permissible continuous current at 35 °C (catalogue value)[A]

TECHNICAL DATA

MKHF/MKHS

Cross sections⁽¹⁾


In case of using a neutral conductor copper pos. 1 will be taken. Layout of the system on request.
(see page 3)

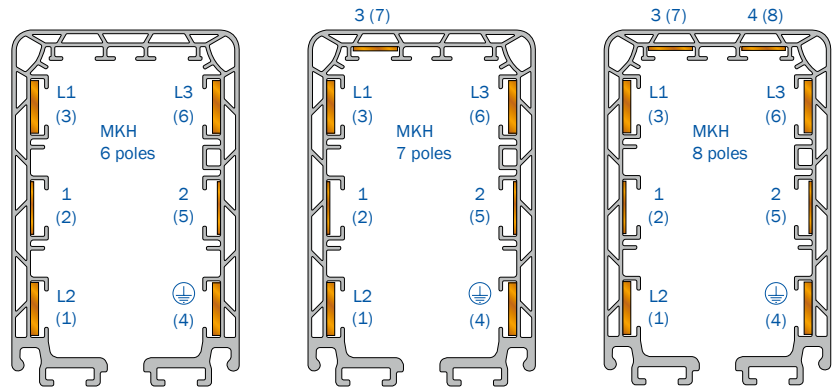

Type ⁽²⁾ (HS with PE / SS without PE)	No. of poles	Copper cross section mm ²				Ampere rating with 35 °C in A, L1, L2, L3 ⁽⁵⁾			Nom- inal volt- age V ⁽⁴⁾	Impedance at 50 Hz 20 °C Ω/1000 m		Resistance at 20 °C Ω/1000 m		Leak- age dis- tance mm
		Phase L1, L2, L3	⊥	Control line		60 % ED	80 % ED	100 % ED		Phase L1, L2, L3	⊥	Phase L1, L2, L3	⊥	
MKH ... 6/63-HSC	6	3x10	10	2x10		81	70	63	690	1.731		1.717	1.717	30
MKH ... 6/63-SSD	6			6x10		81	70	63	690	1.731		1.717		30
MKH ... 6/80-HSC	6	3x17	17	2x10		103	89	80	690	1.078		1.057	1.057	30
MKH ... 6/100-HSC	6	3x26	26	2x10		129	112	100	690	0.717	0.717	0.687	0.687	30
MKH ... 6/140-HSC	6	3x33	26	2x10		161	140	125	690	0.586	0.717	0.549	0.687	30
MKH ... 6/160-HSC	6	3x42	26	2x10		184	160	143	690	0.473	0.717	0.429	0.687	30
MKH ... 6/200-HSC ⁽³⁾	6	3x51	26	2x10		231	200	179	690	0.393	0.717	0.344	0.687	30
MKH ... 7/63-HSC	7	3x10	10	2x10	1x11	81	70	63	690	1.731		1.717	1.717	30
MKH ... 7/63-SSD	7			6x10	1x11	81	70	63	690	1.731		1.717		30
MKH ... 7/80-HSC	7	3x17	17	2x10	1x11	103	89	80	690	1.078		1.057	1.057	30
MKH ... 7/100-HSC	7	3x26	26	2x10	1x11	129	112	100	690	0.717	0.717	0.687	0.687	30
MKH ... 7/140-HSC	7	3x33	26	2x10	1x11	161	140	125	690	0.586	0.717	0.549	0.687	30
MKH ... 7/160-HSC	7	3x42	26	2x10	1x11	184	160	143	690	0.473	0.717	0.429	0.687	30
MKH ... 7/200-HSC ⁽³⁾	7	3x51	26	2x10	1x11	231	200	179	690	0.393	0.717	0.344	0.687	30
MKH ... 8/63-HSC	8	3x10	10	2x10	2x11	81	70	63	690	1.731		1.717	1.717	30
MKH ... 8/63-SSD	8			6x10	2x11	81	70	63	690	1.731		1.717		30
MKH ... 8/80-HSC	8	3x17	17	2x10	2x11	103	89	80	690	1.078		1.057	1.057	30
MKH ... 8/100-HSC	8	3x26	26	2x10	2x11	129	112	100	690	0.717	0.717	0.687	0.687	30
MKH ... 8/140-HSC	8	3x33	26	2x10	2x11	161	140	125	690	0.586	0.717	0.549	0.687	30
MKH ... 8/160-HSC	8	3x42	26	2x10	2x11	184	160	143	690	0.473	0.717	0.429	0.687	30
MKH ... 8/200-HSC ⁽³⁾	8	3x51	26	2x10	2x11	231	200	179	690	0.393	0.717	0.344	0.687	30


Type MKHF

with plug-in joints, factory assembled

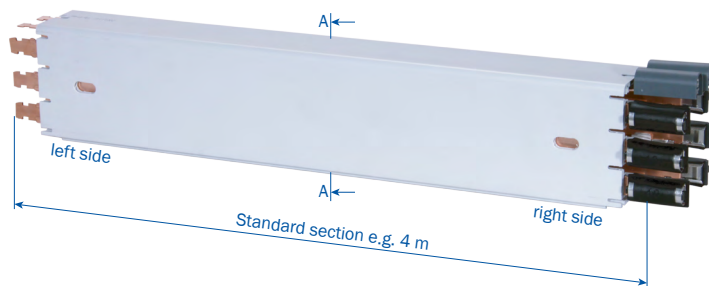

Type MKHS

with bolted joints, factory assembled

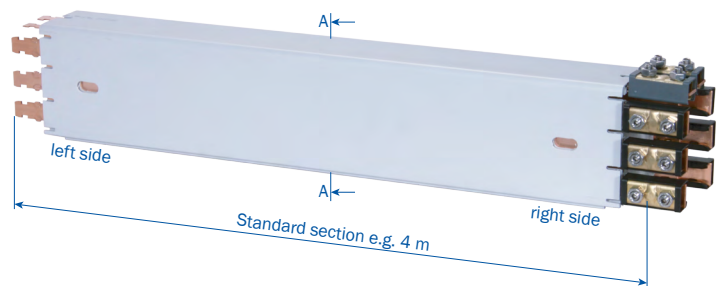

(1) Numbers in parenthesis apply to control line

(2) Complete types e.g. MKH ... 7/63HSC for 7 poles with bolted joints

(3) only for MKHS

(4) Nominal voltage UL = 600 V

TECHNICAL DATA AND STANDARD SECTIONS


Cross sections⁽¹⁾

In case of using a neutral conductor copper pos. 1 will be taken.

Layout of the system on request.



Pole 9 and 10 for max. 24 V

AC or 60 V DC.

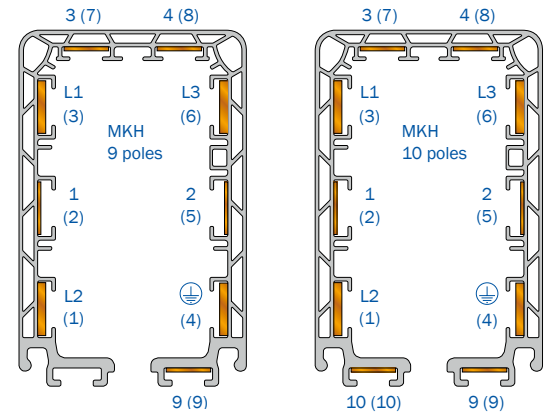

Type	No. of poles	Copper cross section mm ²				Ampere rating with 35 °C in A, L1, L2, L3 ⁽³⁾			Nominal voltage V	Impedance at 50 Hz 20 °C Ω/1000 m		Resistance at 20 °C Ω/1000 m		Leakage distance mm
		Phase L1, L2, L3	⊕	Control line		60 % ED	80 % ED	100 % ED		Phase L1, L2, L3	⊕	Phase L1, L2, L3	⊕	
MKHD ... 9/63-HSC	9	3x10	10	2x10	3x11	81	70	63	690	1.731		1.717	1.717	30
MKHD ... 9/63-SSD	9			6x10	3x11	81	70	63	690	1.731		1.717		30
MKHD ... 9/80-HSC	9	3x17	17	2x10	3x11	103	89	80	690	1.078		1.057	1.057	30
MKHD ... 9/100-HSC	9	3x26	26	2x10	3x11	129	112	100	690	0.717	0.717	0.687	0.687	30
MKHD ... 9/140-HSC	9	3x33	26	2x10	3x11	161	140	125	690	0.586	0.717	0.549	0.687	30
MKHD ... 9/160-HSC	9	3x42	26	2x10	3x11	184	160	143	690	0.473	0.717	0.429	0.687	30
MKHD ... 10/63-HSC	10	3x10	10	2x10	4x11	81	70	63	690	1.731		1.717	1.717	30
MKHD ... 10/63-SSD	10			6x10	4x11	81	70	63	690	1.731		1.717		30
MKHD ... 10/63-HSC	10	3x17	17	2x10	4x11	103	89	80	690	1.078		1.057	1.057	30
MKHD ... 10/100-HSC	10	3x26	26	2x10	4x11	129	112	100	690	0.717	0.717	0.687	0.687	30
MKHD ... 10/140-HSC	10	3x33	26	2x10	4x11	161	140	125	690	0.586	0.717	0.549	0.687	30
MKHD ... 10/160-HSC	10	3x42	26	2x10	4x11	184	160	143	690	0.473	0.717	0.429	0.687	30

Type MKHD for continuous copper strips

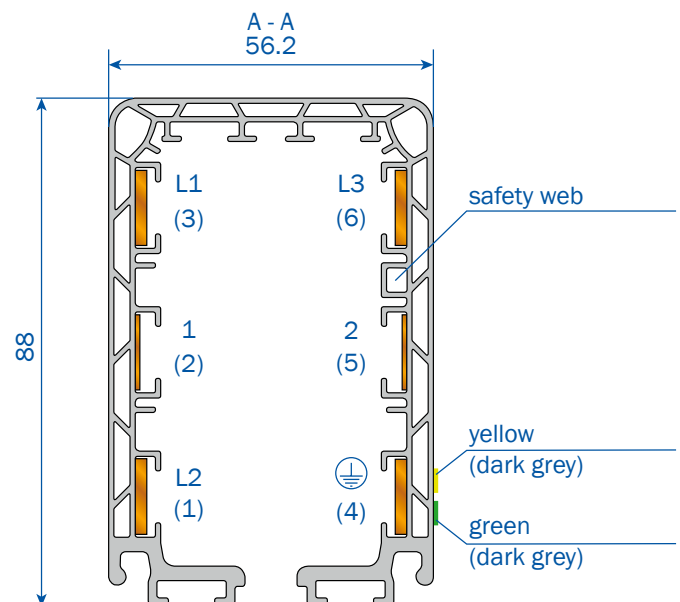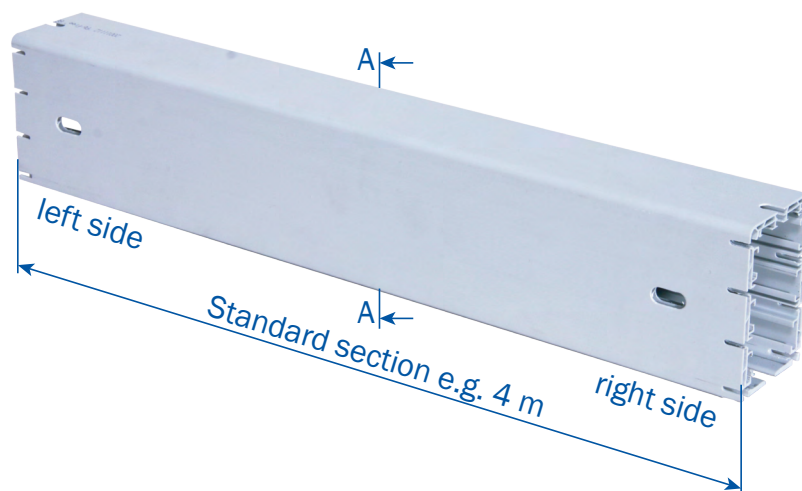

(1) Numbers in parentheses apply to control line

(2) Nominal voltage UL = 600 V

(3) Power consumption UL on request

TYPES AND ORDER NUMBERS

Type MKHF

with factory assembled copper strips and plug-in joints
(63 – 100 A)




Type MKHS

with factory assembled copper strips and bolted joints
(63 – 200 A)



Type MKHD

with continuous copper strips
(to be drawn in during installation)

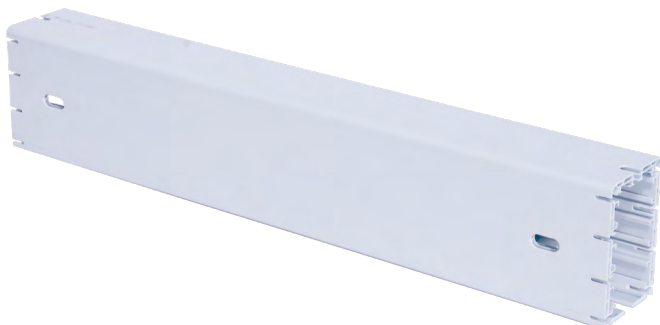

Type ⁽¹⁾	Weight kg/m	Order No.
MKHF6/63-...HSC	1.638	263204 •
MKHF6/63-...SSD	1.638	263224 •
MKHF6/80-...HSC	1.839	263214 •
MKHF6/100-...HSC	2.176	262054 •
MKHF7/63-...HSC	1.748	263234 •
MKHF7/63-...SSD	1.748	263254 •
MKHF7/80-...HSC	1.949	263244 •
MKHF7/100-...HSC	2.277	262094 •
MKHF8/63-...HSC	1.858	263264 •
MKHF8/63-...SSD	1.858	263284 •
MKHF8/80-...HSC	2.059	263274 •
MKHF8/100-...HSC	2.387	262134 •

Type ⁽¹⁾	Weight kg/m	Order No.
MKHS6/63-...HSC	1.824	263294 •
MKHS6/63-...SSD	1.824	263314 •
MKHS6/80-...HSC	1.950	263304 •
MKHS6/100-...HSC	2.353	262204 •
MKHS6/140-...HSC	2.530	262214 •
MKHS6/160-...HSC	2.773	262224 •
MKHS6/200-...HSC	3.019	262234 •
MKHS7/63-...HSC	1.961	263324 •
MKHS7/63-...SSD	1.961	263344 •
MKHS7/80-...HSC	2.087	263334 •
MKHS7/100-...HSC	2.490	262274 •
MKHS7/140-...HSC	2.667	262284 •
MKHS7/160-...HSC	2.910	262294 •
MKHS7/200-...HSC	3.156	262304 •
MKHS8/63-...HSC	2.098	263354 •
MKHS8/63-...SSD	2.098	263374 •
MKHS8/80-...HSC	2.224	263364 •
MKHS8/100-...HSC	2.627	262344 •
MKHS8/140-...HSC	2.804	262354 •
MKHS8/160-...HSC	3.047	262364 •
MKHS8/200-...HSC	3.293	262374 •

Type ⁽¹⁾	Weight kg/m	Order No.
MKHD-...HSC	1.052	262504 •
MKHD-...SSD	1.052	262514 •

(1) Complete types e.g. MKHD-**4000**HSC for 4 m Order No. 262504

MKHF8/63-**2750**HSC for 2750 mm Order No. 263263. Short sections are rounded up.

The 4-digit number (in bold) in the type indicates the length of the section in mm.


• The last number of the order specifies the section length in meters. Please change the suffix the order number with 1, 2, 3 for shorter sections

HANGERS AND END SECTIONS

MKHF/MKHS/MKHD


Sliding hanger

Type	Weight kg	Order No.
AH-MGH	0.134	262000
AH-MGH/K ⁽¹⁾	0.134	262003

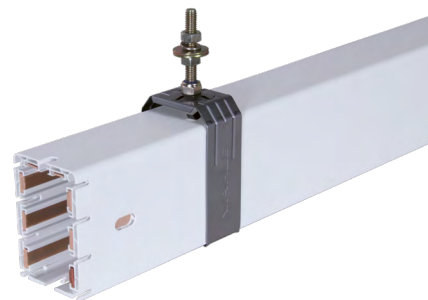

Fixpoint hanger


Type	Weight kg	Order No.
AH-MFH	0.182	262001
AH-MFH/K ⁽¹⁾	0.182	262002

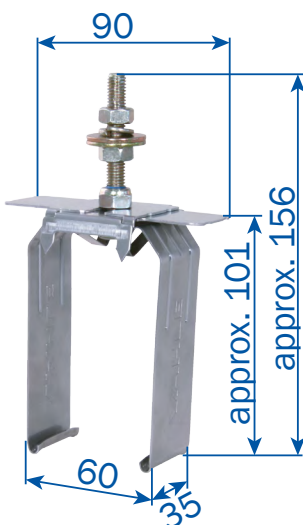

End section (MKHD)


with 0.3m section

Type	Weight kg	Execution	Order No.
EK-MHED/L	0.401	left	262537
EK-MHED/R	0.401	right	262536

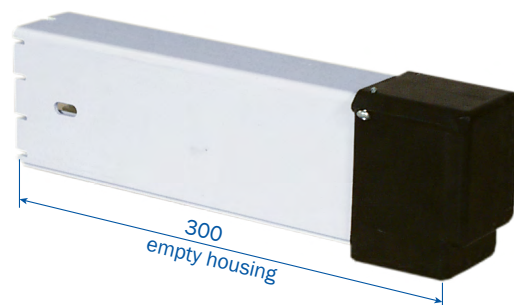

End cap (MKHF / MKHS)

Type	Weight kg	Execution	Order No.
EK-MSES	0.308	left and right	235141





(1) /K for stainless-steel hardware

JOINTING MATERIAL AND END FEEDS

MKHF/MKHS/MKHD


Joint cap, self locking (MKHD)

Type	Weight kg	Order No.
VM-MVMD	0.160	234678

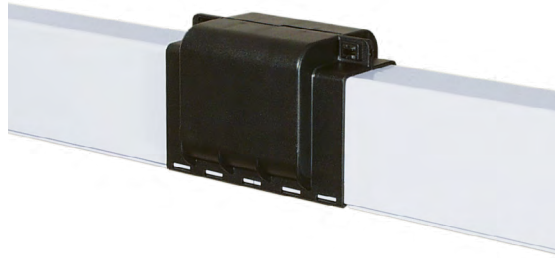



Joint cap, self locking (MKHF / MKHS)

Type	Weight kg	Order No.
VM-MVMS	0.274	234585



End feed (MKHD)


End feed comes loose without standard section. It can be mounted at the left or right hand side. Electrical connection with customer supplied cable shoes to M6 terminals

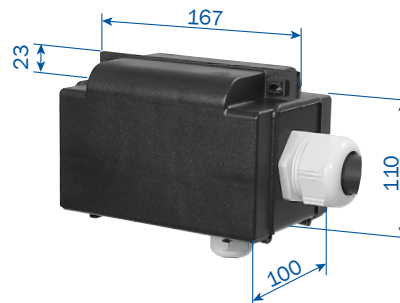

Type	Weight kg	Cable gland (dimensions see page 32)	Order No.
ES-MKED6-8/63-80HS	0.515	M 25 and M 40	235152
ES-MKED9-10/63-80HS	1.071	M 25 and M 40	262538
ES-MKED6-8/63SS	0.470	M 25	235157
ES-MKED9-10/63SS	1.020	M 25	262539

End feed (MKHF / MKHS)

End feed comes loose without standard section. It can be mounted at the left or right hand side. Electrical connection with customer supplied cable shoes to M6 terminals

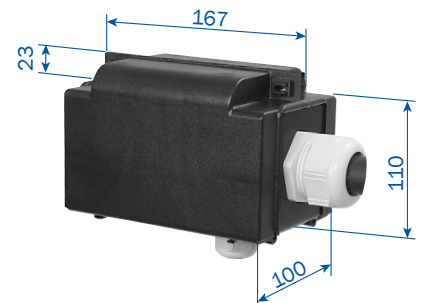


Type	Weight kg	Cable gland (dimensions see page 32)	Order No.
ES-MKES6-8/63-80HS	0.492	M 25 and M 40	235230
ES-MKES6-8/63SS	0.446	M 25	235233

LINE FEEDS

MKHF/MKHS

Electrical connection with customer supplied cable shoes to M8 terminals

type MHGF (on photo)
and MHGS

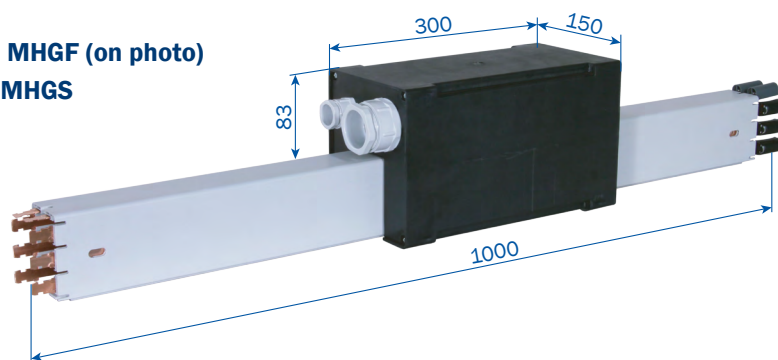

Type	Weight kg	M-Cable gland (dimensions see page 32)	Order No.
ES-MHGF6/63HSC-1000	3.056	M 50 and M 25	263205
ES-MHGF7/63HSC-1000	3.250	M 50 and M 25	263206
ES-MHGF8/63HSC-1000	3.444	M 50 and M 25	263207
ES-MHGF6/80HSC-1000	3.288	M 50 and M 25	263208
ES-MHGF7/80HSC-1000	3.482	M 50 and M 25	263209
ES-MHGF8/80HSC-1000	3.676	M 50 and M 25	263210
ES-MHGF6/100HSC-1000	3.616	M 50 and M 25	262498
ES-MHGF7/100HSC-1000	3.810	M 50 and M 25	262499
ES-MHGF8/100HSC-1000	4.004	M 50 and M 25	262500
ES-MHGF6/63SSD-1000	2.948	M 25	263215
ES-MHGF7/63SSD-1000	3.142	M 25	263216
ES-MHGF8/63SSD-1000	3.336	M 25	263217


Type	Weight kg	M-Cable gland (dimensions see page 32)	Order No.
ES-MHGS6/63HSC-1000	3.242	M 50 and M 25	263218
ES-MHGS7/63HSC-1000	3.463	M 50 and M 25	263219
ES-MHGS8/63HSC-1000	3.684	M 50 and M 25	263220
ES-MHGS6/80HSC-1000	3.474	M 50 and M 25	263225
ES-MHGS7/80HSC-1000	3.695	M 50 and M 25	263226
ES-MHGS8/80HSC-1000	3.916	M 50 and M 25	263227
ES-MHGS6/100HSC-1000	3.802	M 50 and M 25	262456
ES-MHGS7/100HSC-1000	4.023	M 50 and M 25	262457
ES-MHGS8/100HSC-1000	4.244	M 50 and M 25	262458
ES-MHGS6/140HSC-1000	3.965	M 50 and M 25	262459
ES-MHGS7/140HSC-1000	4.186	M 50 and M 25	262460
ES-MHGS8/140HSC-1000	4.407	M 50 and M 25	262461
ES-MHGS6/160HSC-1000	4.208	M 50 and M 25	262462
ES-MHGS7/160HSC-1000	4.429	M 50 and M 25	262463
ES-MHGS8/160HSC-1000	4.650	M 50 and M 25	262464
ES-MHGS6/200HSC-1000	4.454	M 50 and M 25	262465
ES-MHGS7/200HSC-1000	4.675	M 50 and M 25	262466
ES-MHGS8/200HSC-1000	4.896	M 50 and M 25	262467
ES-MHGS6/63SSD-1000	3.135	M 25	263228
ES-MHGS7/63SSD-1000	3.356	M 25	263229
ES-MHGS8/63SSD-1000	3.577	M 25	263230

LINE FEEDS

MKHF/MKHS

Electrical connection with customer supplied cable shoes to M8 terminals

type MHLF
and MHLS (on photo)

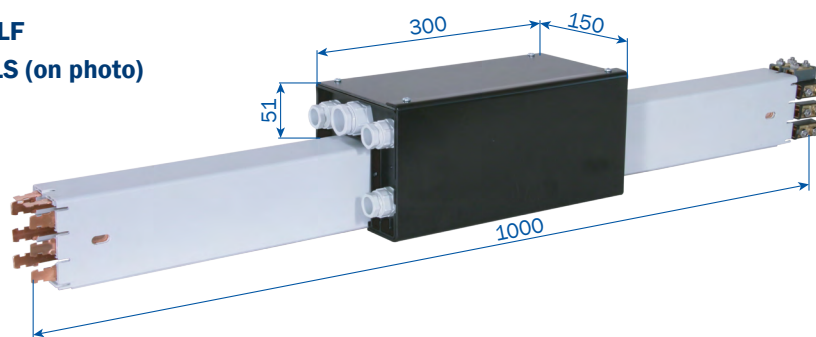

Type	Weight kg	M-Cable gland (dimensions see page 32)	Order No.
ES-MHLF6/63HSC-1000-0	3.170	M 25 for L1, L2, L3	263235
ES-MHLF7/63HSC-1000-0	3.364	M 25 for 1 – 4	263236
ES-MHLF8/63HSC-1000-0	3.558	M 20 for PE	263237
ES-MHLF6/80HSC-1000-0	3.402		263238
ES-MHLF7/80HSC-1000-0	3.596		263239
ES-MHLF8/80HSC-1000-0	3.790		263240
ES-MHLF6/100HSC-1000-0	3.730		262486
ES-MHLF7/100HSC-1000-0	3.924		262487
ES-MHLF8/100HSC-1000-0	4.118		262488
ES-MHLF6/63SSD-1000-0	3.075	M 25	263245
ES-MHLF7/63SSD-1000-0	3.269		263246
ES-MHLF8/63SSD-1000-0	3.463		263247

Type	Weight kg	M-Cable gland (dimensions see page 32)	Order No.
ES-MHLS6/63HSC-1000-0	3.356	M 25 for L1, L2, L3	263248
ES-MHLS7/63HSC-1000-0	3.577	M 25 for 1 – 4	263249
ES-MHLS8/63HSC-1000-0	3.798	M 20 for PE	263250
ES-MHLS6/80HSC-1000-0	3.588		263255
ES-MHLS7/80HSC-1000-0	3.809		263256
ES-MHLS8/80HSC-1000-0	4.030		263257
ES-MHLS6/100HSC-1000-0	3.916		262524
ES-MHLS7/100HSC-1000-0	4.137		262525
ES-MHLS8/100HSC-1000-0	4.358		262526
ES-MHLS6/140HSC-1000-0	4.081	M 25 for PE, L1, L2, L3	262527
ES-MHLS7/140HSC-1000-0	4.302	M 25 for 1 – 4	262528
ES-MHLS8/140HSC-1000-0	4.523		262529
ES-MHLS6/160HSC-1000-0	4.324		262530
ES-MHLS7/160HSC-1000-0	4.545		262531
ES-MHLS8/160HSC-1000-0	4.766		262532
ES-MHLS6/200HSC-1000-0	4.570		262533
ES-MHLS7/200HSC-1000-0	4.791		262534
ES-MHLS8/200HSC-1000-0	5.012		262535
ES-MHLS6/63SSD-1000-0	3.256	M 25	263258
ES-MHLS7/63SSD-1000-0	3.477		263259
ES-MHLS8/63SSD-1000-0	3.698		263260


LINE FEEDS

MKHD


Electrical connection with customer supplied cable shoes to M8 terminals

Type	Weight kg	M-Cable gland (dimensions see page 32)	Order No.
ES-MHGD6/63-100HSC-1000	2.445	M 50 and M 25	262545
ES-MHGD7/63-100HSC-1000	2.530	M 50 and M 25	262546
ES-MHGD8/63-100HSC-1000	2.615	M 50 and M 25	262547
ES-MHGD9/63-100HSC-1000	2.654	M 50 and M 25	262548
ES-MHGD10/63-100HSC-1000	2.693	M 50 and M 25	262549
ES-MHGD6/140-160HSC-1000	2.431	M 50 and M 25	262550
ES-MHGD7/140-160HSC-1000	2.516	M 50 and M 25	262551
ES-MHGD8/140-160HSC-1000	2.601	M 50 and M 25	262552
ES-MHGD9/140-160HSC-1000	2.640	M 50 and M 25	262553
ES-MHGD10/140-160HSC-1000	2.679	M 50 and M 25	262554
ES-MHGD6/63SSD-1000	2.385	M 25	262540
ES-MHGD7/63SSD-1000	2.460	M 25	262541
ES-MHGD8/63SSD-1000	2.545	M 25	262542
ES-MHGD9/63SSD-1000	2.584	M 25	262543
ES-MHGD10/63SSD-1000	2.623	M 25	262544

type MHGD

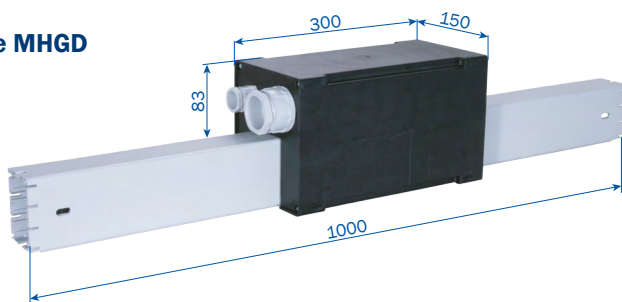

type MHLD

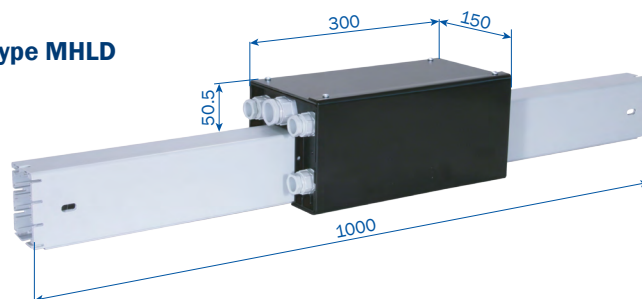

Type	Weight kg	M-Cable gland (dimensions see page 32)	Order No.
ES-MHLD6/63-100HSC-1000-0	2.565	M 25 for L1, L2, L3 M 25 for 1 – 4 M 20 for PE, 9/10	262560
ES-MHLD7/63-100HSC-1000-0	2.651		262561
ES-MHLD8/63-100HSC-1000-0	2.737		262562
ES-MHLD9/63-100HSC-1000-0	2.745		262563
ES-MHLD10/63-100HSC-1000-0	2.749		262564
ES-MHLD6/140-160HSC-1000-0	2.553	M 25 for L1, L2, L3 M 25 for 1 – 4 M 20 for PE, 9/10	262565
ES-MHLD7/140-160HSC-1000-0	2.639		262566
ES-MHLD8/140-160HSC-1000-0	2.725		262567
ES-MHLD9/140-160HSC-1000-0	2.733		262568
ES-MHLD10/140-160HSC-1000-0	2.737		262569
ES-MHLD6/63SSD-1000-0	2.517	1 x M 25	262555
ES-MHLD7/63SSD-1000-0	2.593		262556
ES-MHLD8/63SSD-1000-0	2.679		262557
ES-MHLD9/63SSD-1000-0	2.687	2 x M 25	262558
ES-MHLD10/63SSD-1000-0	2.691		262559

CURVED SECTIONS AND SEALING STRIPS

MKHF/MKHS/MKHD

Curves

Min. bending radius, horizontal = 1000 mm

max. length L = 3600 mm

max. $\sphericalangle$ 120°

Smallest vertical radius: on request

HR for SI = Horizontal radius – Safety web inside

HR for SA = Horizontal radius – Safety web outside

VRO = Vertical radius upwards


VRU = Vertical radius downwards

Safety web will be mounted in direction of track.

Changes in measurements of curves have to be mentioned for replacement orders.

Sealing strip including accessories

The sealing strip is available in lengths of 10 m, 20 m and 40 m.

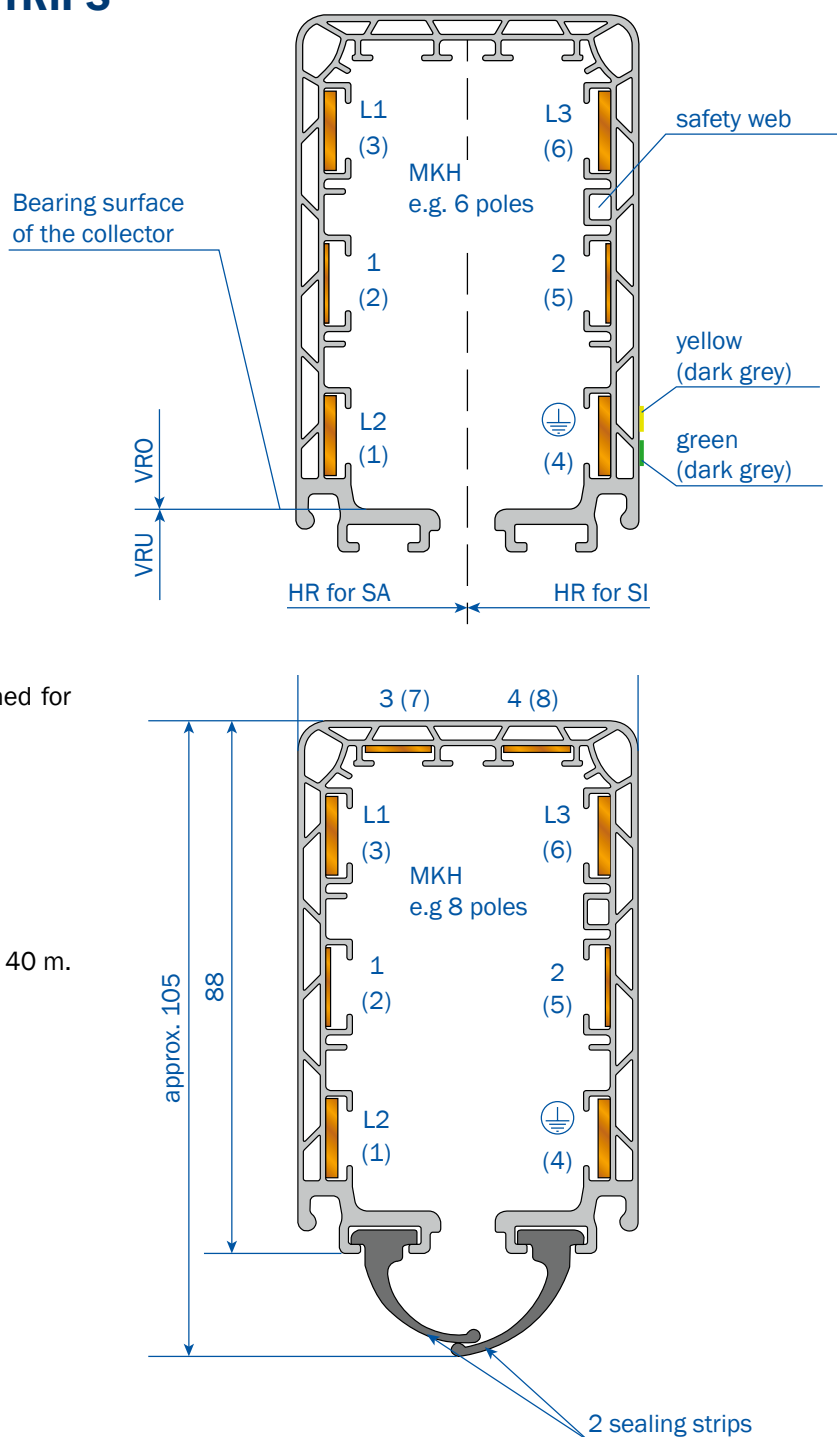



Type	Description	Order No.
DL-D-KBH-MKH-MKL-TDV10 ⁽¹⁾	Sealing strip 10 m long	600551-10
DL-D-KBH-MKH-MKL-TDV20 ⁽¹⁾	Sealing strip 20 m long	600551-20
DL-D-KBH-MKH-MKL-TDV40 ⁽¹⁾	Sealing strip 40 m long	600551-40
DL-F-MKL/H	Fixing clamp for sealing strip (1 per end)	236105
DL-V-KSLT-KBH-MKL/H-LSV/G	Joint for coupling the sealing strip (2 per joint)	258300
DL-EZRD-MKL/H	Mounting glider for sealing strip EZRD	234552
SA-ZB-DG-MSWA-S	Sealing strip slide plate for collector MSWA	236625

(1) The max. single length is 40 m long. For longer distances joint laces are necessary.

For each meter system length 2 m sealing strip to be ordered.

Not available for 9- and 10-pole systems.


MOUNTING BRACKETS FOR I-BEAM

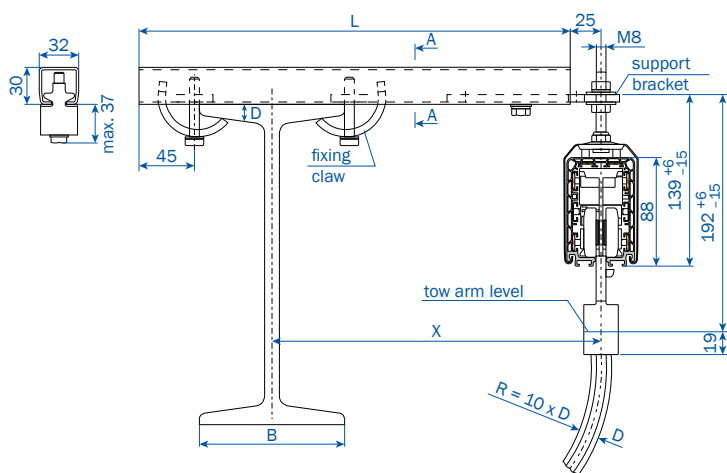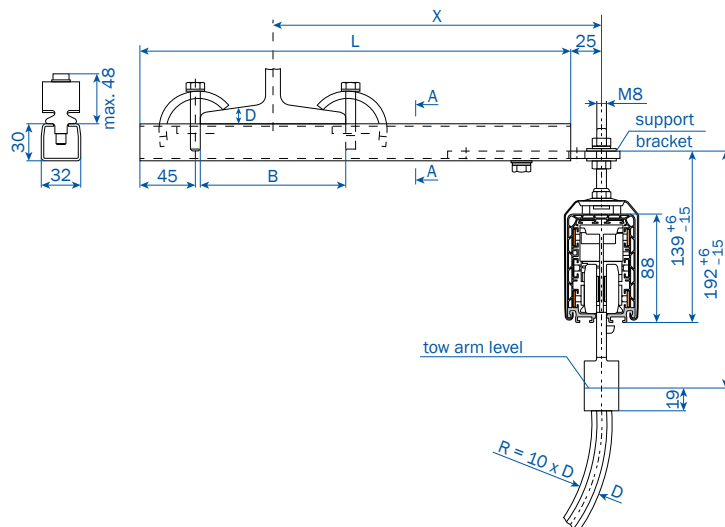MKHF/MKHS/MKHD
Position of the fixing claw for D = 6 – 15 mm

Position of the fixing claw for D = 15 – 25 mm

Arrangement EHK with small fixing claw

Attention! Make sure that hoist wheels have enough clearance!

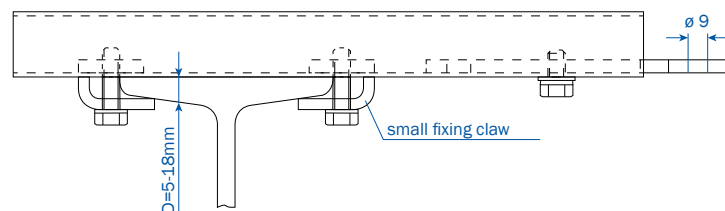Use small claw if necessary!

The □-rail of EHK is identical to type S1 (catalog 8a).




Type ⁽¹⁾	X mm	L mm	B max ⁽²⁾ mm	Weight kg	Order No. standard version	with small fixing claw ⁽¹⁾
HK-EHK250-NS	250	350	170	1.080	251600	–
HK-EHK250-KS ...					–	251720-...
HK-EHK300-NS	300	400	170	1.128	251610	–
HK-EHK300-KS ...					–	251730-...
HK-EHK400-NS	400	500	170	1.313	251620	–
HK-EHK400-KS ...					–	251740-...
HK-EHK500-NS	500	600	170	1.510	251630	–
HK-EHK500-KS ...					–	251750-...
HK-EHK600-NS	600	700	170	1.639	251640	–
HK-EHK600-KS ...					–	251760-...
HK-EHK700-NS	700	800	170	1.804	251650	–
HK-EHK700-KS ...					–	251770-...
HK-EHK750-NS	750	850	170	1.782	251660	–
HK-EHK750-KS ...					–	251780-...
HK-EHK800-NS	800	900	170	2.026	251670	–
HK-EHK800-KS ...					–	251790-...

(1) e.g. HK-EHK250-KS12 → Order No. 251720-12 for fixing claw with D = 12 mm


(2) Select next larger size bracket when your I-beam dimension B is more than 170.

The corresponding beam width (B_{max}) can be increased up to approx. 300 mm by reducing X.

MOUNTING BRACKETS for workstation cranes - no welding or drilling

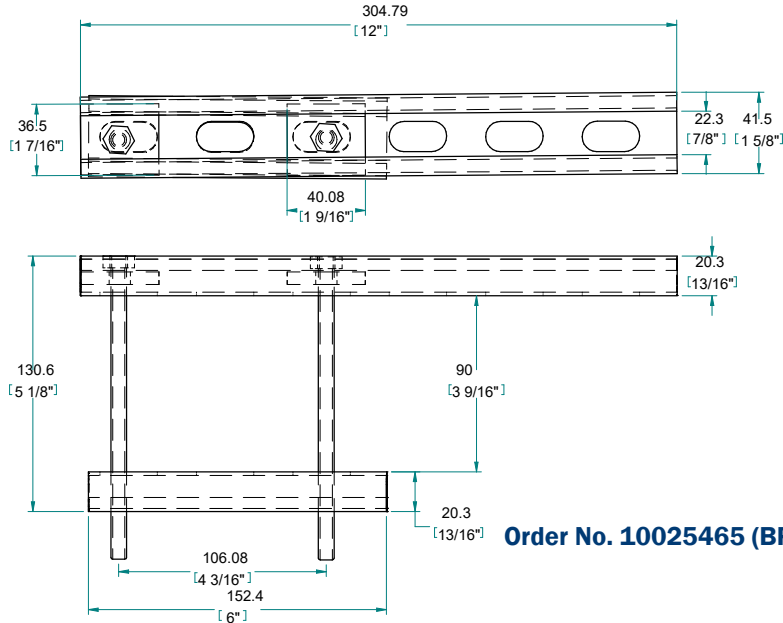

Order No. 10025465 (BR-G305)

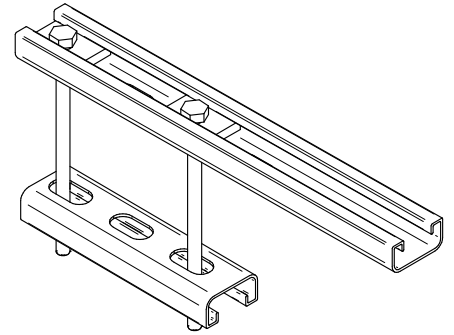




WEB MOUNTED BRACKETS for bolted or welded connection



Order No. 10032992 (BR-L400) steel

Order No. 10029896 (BR-L400) galvanized steel


Stock item for quick shipments

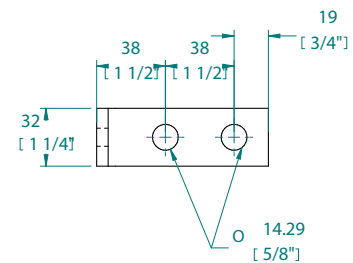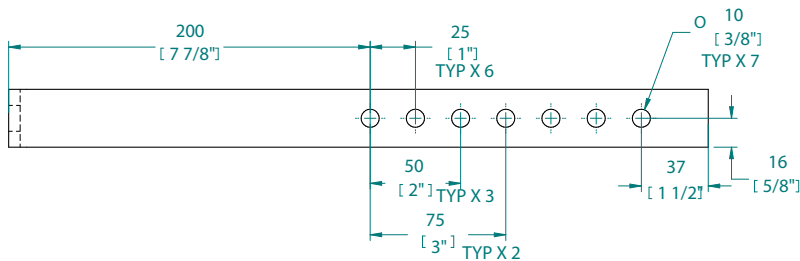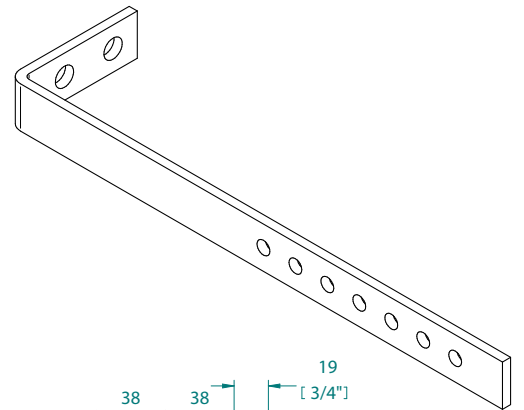

HEATING MKHF/MKHS/MKHD

Heating cable

Type	Resistance ⁽¹⁾	Order No.
HL-0,10-EYCEX-5203-PTFE-260-750	0.10 Ω/m	196381
HL-0,15-EYCEX-5203-PTFE-260-750	0.15 Ω/m	196382
HL-0,20-EYCEX-5203-PTFE-260-750	0.20 Ω/m	196383
HL-0,32-EYCEX-5203-PTFE-260-750	0.32 Ω/m	196384
HL-0,38-EYCEX-5203-PTFE-260-750	0.38 Ω/m	196385
HL-0,48-EYCEX-5203-PTFE-260-750	0.48 Ω/m	196386
HL-0,60-EYCEX-5203-PTFE-260-750	0.60 Ω/m	196387
HL-0,81-EYCEX-5203-PTFE-260-750	0.81 Ω/m	196389
HL-1,00-EYCEX-5203-PTFE-260-750	1.00 Ω/m	196390
HL-1,44-EYCEX-5203-PTFE-260-750	1.44 Ω/m	196391
HL-2,00-EYCEX-5203-PTFE-260-750	2.00 Ω/m	196392
HL-3,00-EYCEX-5203-PTFE-260-750	3.00 Ω/m	196393
HL-4,00-EYCEX-5203-PTFE-260-750	4.00 Ω/m	196394
HL-4,40-EYCEX-5203-PTFE-260-750	4.40 Ω/m	196395
HL-5,16-EYCEX-5203-PTFE-260-750	5.16 Ω/m	196396
HL-5,60-EYCEX-5203-PTFE-260-750	5.60 Ω/m	196397

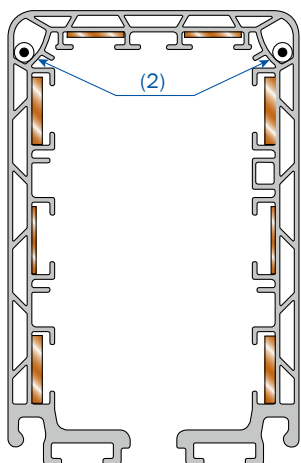

We recommend a heating system for outdoor installations and installations in humid plants. The heating consists of arrangement two heating cables as per drawing.

Attention: Switch on heating system below +5 °C ambient temperature.

The type of heating cable has to be calculated: heat output per heating cable between 20 – 25 W/m.


For longer heating distances the total length has to be divided into several heating sections. For short heating distances to feed with lower secondary voltage via transformer.

$$\text{Heating capacity Watt/m: } N' = \frac{U^2}{R \cdot L^2}$$

U = Supply voltage (Volt)

R = Resistance of heating cable (Ohm/m)


L = Length of heating section (m)

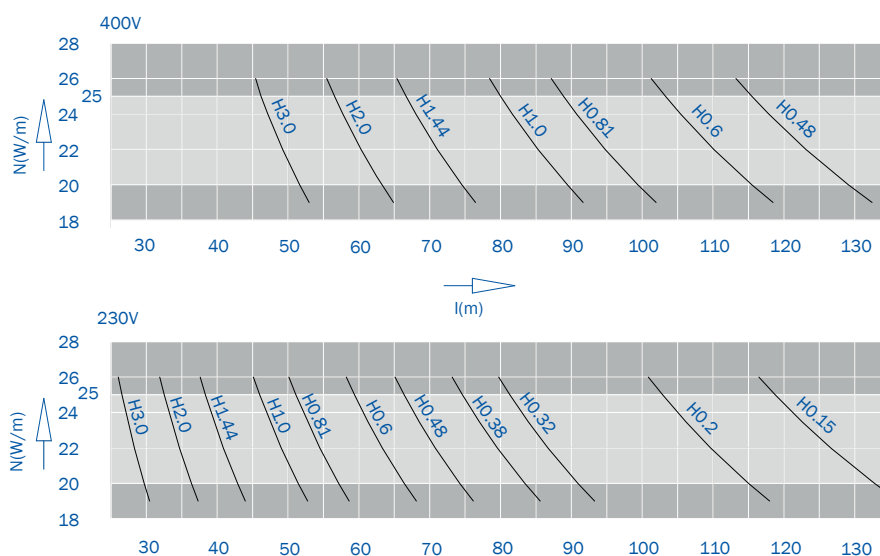


HEATING

Switching examples (depending on the plant situation) MKHF/MKHS/MKHD


a) 2 heating circuits

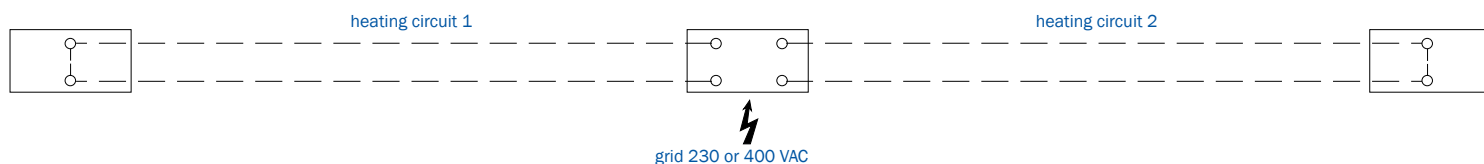

b) 1 heating circuit

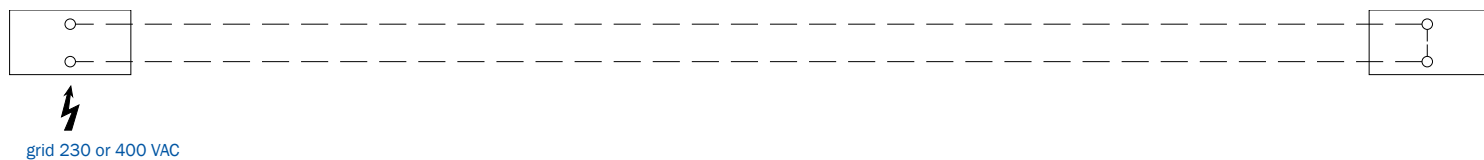

c) 2 heating circuits

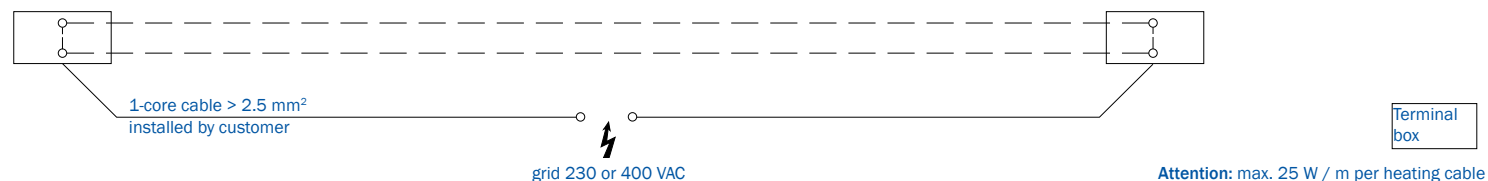

Type	Execution	Cable gland (dimensions see page 13)	Order No.
BH-AKB-MKH-L	left end	M 20	262037
BH-AKB-MKH-R	right end	M 20	262038
BH-AKB-MKH-M	line feed	2 x M 20	262039
BH-MA-KBH-MKL/H-LSV/G	1 set material for connecting clamps		195291

For each end feed box 2 sets of material for connecting ends are required.

For line feed you need 4 sets of material for connection ends.

Order for 60 m conductor system example c)

1) 122 m heating cable type H 2.0 (2x60 m and 2x1 m additional)

Voltage 400 V, two heating circuits in parallel

heating capacity as per above mentioned diagram 2x22 W/m

at 60 m 2x22 W/m ~2640 W = 2.64 kW.

2) 1x junction box left end, 1x junction box right end

3) 4x sets of material for connection ends.


Switch gear assembly and temperature control unit as per customer's inquiry.

Fuses, cables etc. have to be provided by the customer.


CONTACT SECTIONS, TURNTABLES AND SWITCHES

MKHF/MKHS/MKHD


Contact section⁽¹⁾

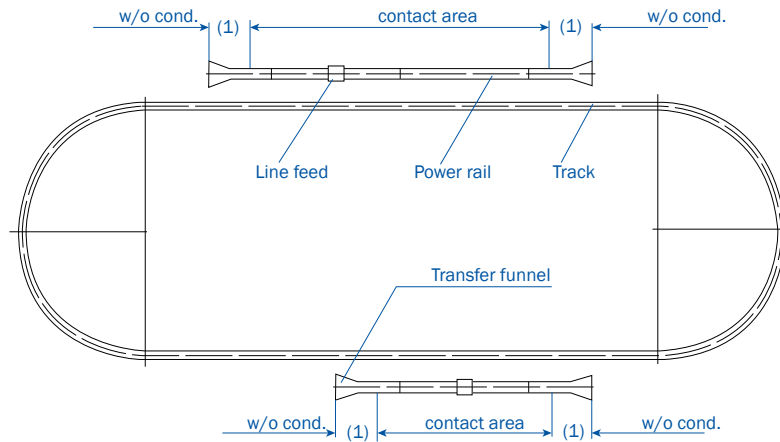

Turntable

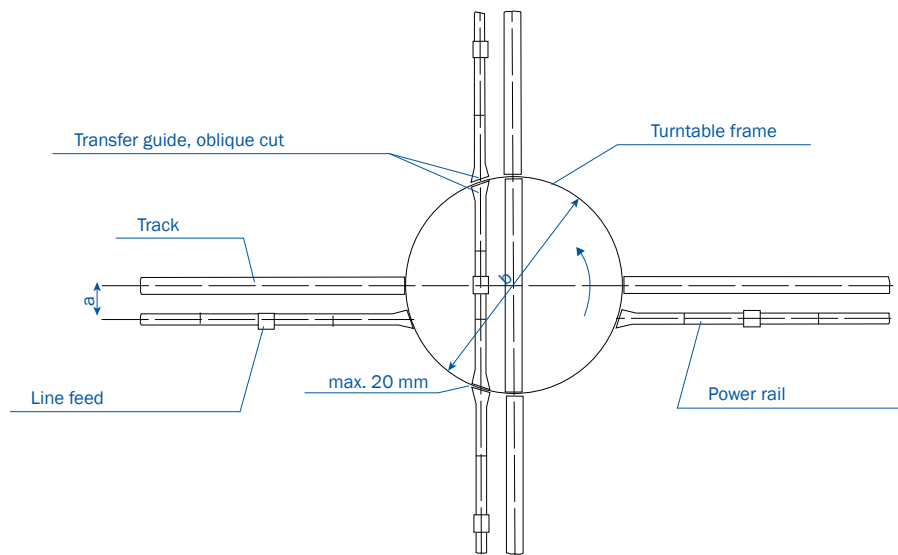

Sliding switch

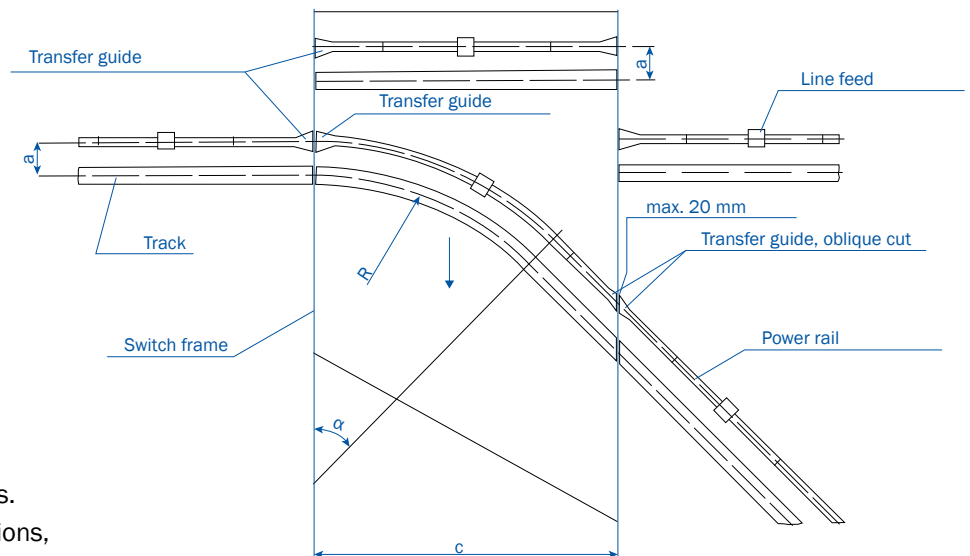

Specify dimensions **a**, **b**, **c**,
R and angle α .
 $\alpha = 50^\circ$ max.



Max. 20 mm air gap between transfer guides.
 To create all components for contact sections,
 turntables and switches we require detailed con-
 struction drawings.

(1) Contact sections must not be activated before collectors are fully engaged.


ENTRY FUNNEL

MKHF/MKHS/MKHD

Power rail should not be activated before the collector carbons have complete contact with the conductors. The use of flexible tow arm is required for all types.

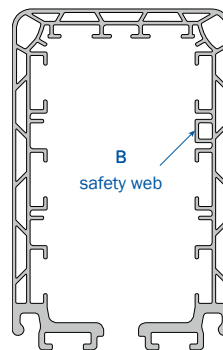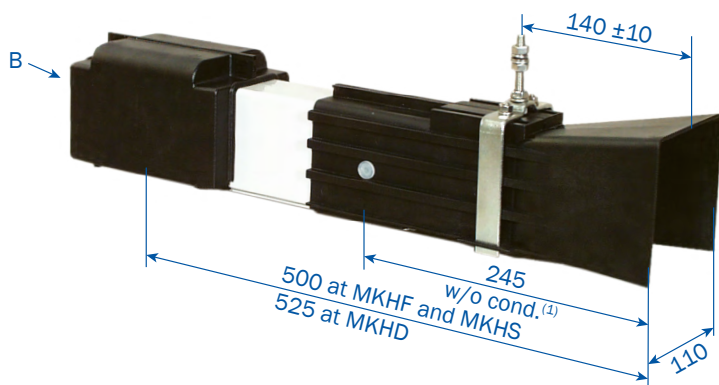

Left version

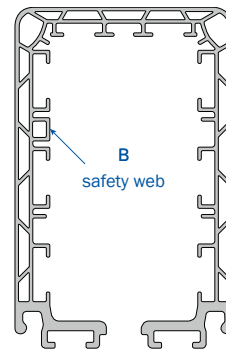

Right version

Offset of the funnel/guide to the collector:

- max. 15 mm horizontal
- max. 10 mm vertical

Max. speed for crossover of the current collector 60 m/min

Type	Weight kg	Order No. Version	
		left	right
ET-MTH6/63-100-L-HSC-500 ⁽⁵²⁵⁾⁽²⁾	2.018	262375	–
ET-MTH6/63-100-R-HSC-500 ⁽⁵²⁵⁾⁽²⁾	2.049	–	262387
ET-MTH7/63-100-L-HSC-500 ⁽⁵²⁵⁾⁽²⁾	2.089	262376	–
ET-MTH7/63-100-R-HSC-500 ⁽⁵²⁵⁾⁽²⁾	2.120	–	262388
ET-MTH8/63-100-L-HSC-500 ⁽⁵²⁵⁾⁽²⁾	2.160	262377	–
ET-MTH8/63-100-R-HSC-500 ⁽⁵²⁵⁾⁽²⁾	2.191	–	262389
ET-MTH6/140-160-L-HSC-500 ⁽⁵²⁵⁾	2.029	262378	–
ET-MTH6/140-160-R-HSC-500 ⁽⁵²⁵⁾	2.060	–	262390
ET-MTH7/140-160-L-HSC-500 ⁽⁵²⁵⁾	2.100	262379	–
ET-MTH7/140-160-R-HSC-500 ⁽⁵²⁵⁾	2.131	–	262391
ET-MTH8/140-160-L-HSC-500 ⁽⁵²⁵⁾	2.171	262380	–
ET-MTH8/140-160-R-HSC-500 ⁽⁵²⁵⁾	2.202	–	262392
ET-MTH6/200-L-HSC-500 ⁽⁵²⁵⁾	2.082	262384	–
ET-MTH6/200-R-HSC-500 ⁽⁵²⁵⁾	2.121	–	262396
ET-MTH7/200-L-HSC-500 ⁽⁵²⁵⁾	2.153	262385	–
ET-MTH7/200-R-HSC-500 ⁽⁵²⁵⁾	2.192	–	262397
ET-MTH8/200-L-HSC-500 ⁽⁵²⁵⁾	2.224	262386	–
ET-MTH8/200-R-HSC-500 ⁽⁵²⁵⁾	2.263	–	262398
ET-MTH6/63-L-SSD-500 ⁽⁵²⁵⁾⁽²⁾	2.006	262381	–
ET-MTH6/63-R-SSD-500 ⁽⁵²⁵⁾⁽²⁾	2.006	–	262393
ET-MTH7/63-L-SSD-500 ⁽⁵²⁵⁾⁽²⁾	2.075	262382	–
ET-MTH7/63-R-SSD-500 ⁽⁵²⁵⁾⁽²⁾	2.075	–	262394
ET-MTH8/63-L-SSD-500 ⁽⁵²⁵⁾⁽²⁾	2.144	262383	–
ET-MTH8/63-R-SSD-500 ⁽⁵²⁵⁾⁽²⁾	2.144	–	262395

(1) corresponding to the center of collector



(2) Also suitable for former version with 40 A

TRANSFER GUIDES


MKHF/MKHS/MKHD

Transfer guides, straight

Necessary with all types of double collectors or 2 single collectors.

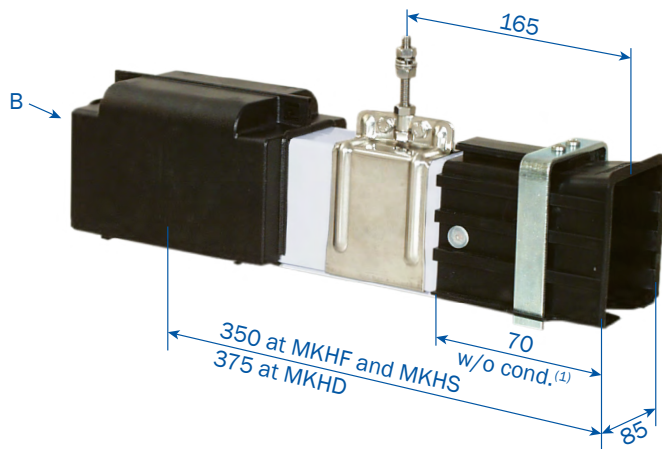

Left version



Right version

Staggered arrangement of the transfer guides to each other:

- max. 4 mm horizontal
- max. 3 mm vertical

Max. speed for crossover of the current collector 80 m/min

Type ⁽¹⁾	Weight kg	Order No. Version	
		left	right
UE-MUH6/63-100-L-HSC-350 ⁽³⁷⁵⁾⁽²⁾	2.005	262399	–
UE-MUH6/63-100-R-HSC-350 ⁽³⁷⁵⁾⁽²⁾	2.005	–	262408
UE-MUH7/63-100-L-HSC-350 ⁽³⁷⁵⁾⁽²⁾	2.077	262400	–
UE-MUH7/63-100-R-HSC-350 ⁽³⁷⁵⁾⁽²⁾	2.077	–	262409
UE-MUH8/63-100-L-HSC-350 ⁽³⁷⁵⁾⁽²⁾	2.119	262401	–
UE-MUH8/63-100-R-HSC-350 ⁽³⁷⁵⁾⁽²⁾	2.119	–	262410
UE-MUH6/140-160-L-HSC-350 ⁽³⁷⁵⁾	2.020	262402	–
UE-MUH6/140-160-R-HSC-350 ⁽³⁷⁵⁾	2.020	–	262411
UE-MUH7/140-160-L-HSC-350 ⁽³⁷⁵⁾	2.092	262403	–
UE-MUH7/140-160-R-HSC-350 ⁽³⁷⁵⁾	2.092	–	262412
UE-MUH8/140-160-L-HSC-350 ⁽³⁷⁵⁾	2.134	262404	–
UE-MUH8/140-160-R-HSC-350 ⁽³⁷⁵⁾	2.134	–	262413
UE-MUH6/200-L-HSC-350 ⁽³⁷⁵⁾	2.092	262417	–
UE-MUH6/200-R-HSC-350 ⁽³⁷⁵⁾	2.092	–	262420
UE-MUH7/200-L-HSC-350 ⁽³⁷⁵⁾	2.164	262418	–
UE-MUH7/200-R-HSC-350 ⁽³⁷⁵⁾	2.164	–	262421
UE-MUH8/200-L-HSC-350 ⁽³⁷⁵⁾	2.236	262419	–
UE-MUH8/200-R-HSC-350 ⁽³⁷⁵⁾	2.236	–	262422
UE-MUH6/63-L-SSD-350 ⁽³⁷⁵⁾⁽²⁾	1.986	262405	–
UE-MUH6/63-R-SSD-350 ⁽³⁷⁵⁾⁽²⁾	1.986	–	262414
UE-MUH7/63-L-SSD-350 ⁽³⁷⁵⁾⁽²⁾	2.055	262406	–
UE-MUH7/63-R-SSD-350 ⁽³⁷⁵⁾⁽²⁾	2.055	–	262415
UE-MUH8/63-L-SSD-350 ⁽³⁷⁵⁾⁽²⁾	2.124	262407	–
UE-MUH8/63-R-SSD-350 ⁽³⁷⁵⁾⁽²⁾	2.124	–	262416



(1) corresponding to the center of collector

(2) Also suitable for former version with 40 A


TRANSFER GUIDES, OBLIQUE⁽¹⁾

MKHF/MKHS/MKHD

Necessary with all types are 2 single collectors.

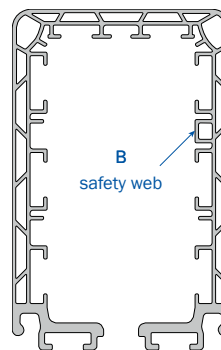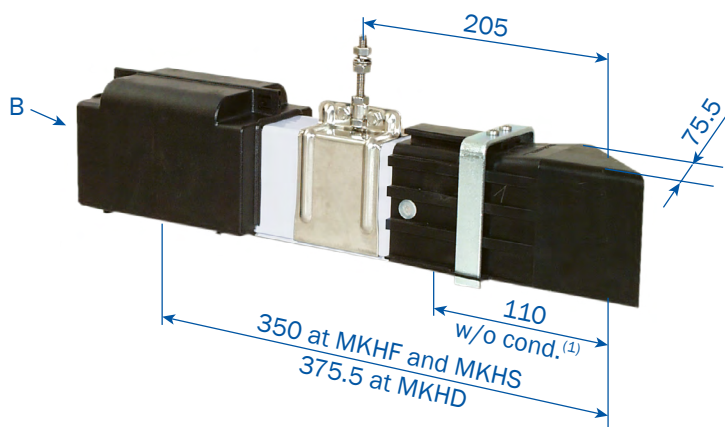

Left version

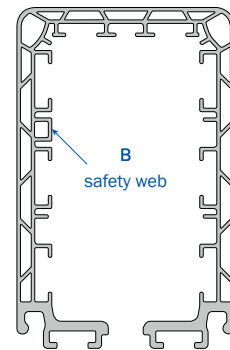

Right version

Staggered arrangement of the transfer guides to each other:

- max. 4 mm horizontal
- max. 3 mm vertical

Max. speed for crossover of the current collector 80 m/min

Type	Weight kg	Order No. Version	
		left	right
UE-MUHS6/63-100-L-HSC-350 ⁽³⁷⁵⁾⁽²⁾	2.017	262423	-
UE-MUHS6/63-100-L-HSC-350 ⁽³⁷⁵⁾⁽²⁾	2.017	-	262432
UE-MUHS7/63-100-L-HSC-350 ⁽³⁷⁵⁾⁽²⁾	2.082	262424	-
UE-MUHS7/63-100-R-HSC-350 ⁽³⁷⁵⁾⁽²⁾	2.082	-	262433
UE-MUHS8/63-100-L-HSC-350 ⁽³⁷⁵⁾⁽²⁾	2.147	262425	-
UE-MUHS8/63-100-R-HSC-350 ⁽³⁷⁵⁾⁽²⁾	2.147	-	262434
UE-MUHS6/140-160-L-HSC-350 ⁽³⁷⁵⁾	2.032	262426	-
UE-MUHS6/140-160-R-HSC-350 ⁽³⁷⁵⁾	2.032	-	262435
UE-MUHS7/140-160-L-HSC-350 ⁽³⁷⁵⁾	2.097	262427	-
UE-MUHS7/140-160-R-HSC-350 ⁽³⁷⁵⁾	2.097	-	262436
UE-MUHS8/140-160-L-HSC-350 ⁽³⁷⁵⁾	2.162	262428	-
UE-MUHS8/140-160-R-HSC-350 ⁽³⁷⁵⁾	2.162	-	262437
UE-MUHS6/200-L-HSC-350 ⁽³⁷⁵⁾	2.050	262441	-
UE-MUHS6/200-R-HSC-350 ⁽³⁷⁵⁾	2.050	-	262444
UE-MUHS7/200-L-HSC-350 ⁽³⁷⁵⁾	2.115	262442	-
UE-MUHS7/200-R-HSC-350 ⁽³⁷⁵⁾	2.115	-	262445
UE-MUHS8/200-L-HSC-350 ⁽³⁷⁵⁾	2.180	262443	-
UE-MUHS8/200-R-HSC-350 ⁽³⁷⁵⁾	2.180	-	262446
UE-MUHS6/63-L-SSD-350 ⁽³⁷⁵⁾⁽²⁾	2.020	262429	-
UE-MUHS6/63-R-SSD-350 ⁽³⁷⁵⁾⁽²⁾	2.020	-	262438
UE-MUHS7/63-L-SSD-350 ⁽³⁷⁵⁾⁽²⁾	2.085	262430	-
UE-MUHS7/63-R-SSD-350 ⁽³⁷⁵⁾⁽²⁾	2.085	-	262439
UE-MUHS8/63-L-SSD-350 ⁽³⁷⁵⁾⁽²⁾	2.150	262431	-
UE-MUHS8/63-R-SSD-350 ⁽³⁷⁵⁾⁽²⁾	2.150	-	262440

(1) corresponding to the center of collector



(2) Also suitable for former version with 40 A

COLLECTOR REMOVAL SECTIONS

MKHF/MKHS/MKHD

Assembly and disassembly of the collector is possible at the end of the track as well as at the removal section.

By opening and closing the sliders at the bottom of the conductor housing the collector can be mounted and removed easily. Before opening disconnect mains.

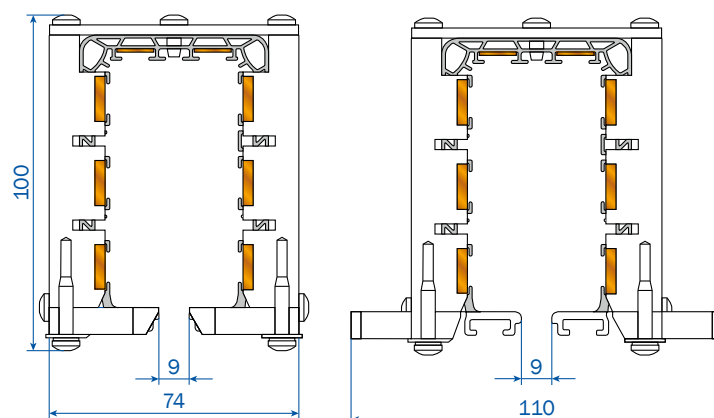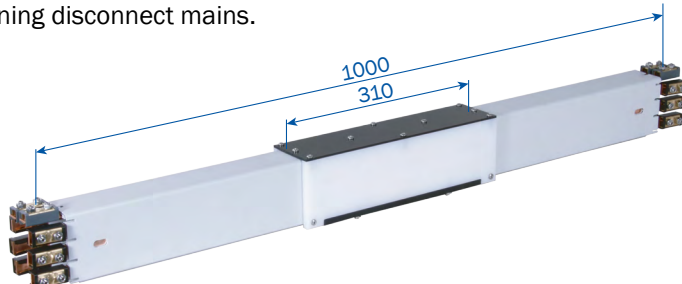

The removal section does not disconnect the power rail electrically.

For single collectors (on photo)

Type	Weight kg	Order No.
AT-MATH6/63-100HSC-1000 ⁽¹⁾	4.392	262147
AT-MATH7/63-100HSC-1000 ⁽¹⁾	4.568	262148
AT-MATH8/63-100HSC-1000 ⁽¹⁾	4.744	262149
AT-MATH 6/140-160HSC-1000	4.422	262150
AT-MATH7/140-160HSC-1000	4.598	262151
AT-MATH8/140-160HSC-1000	4.774	262152
AT-MATH6/200HSC-1000	4.652	262156
AT-MATH7/200HSC-1000	4.828	262157
AT-MATH8/200HSC-1000	5.004	262158
AT-MATH6/63SSD-1000 ⁽¹⁾	4.404	262153
AT-MATH7/63SSD-1000 ⁽¹⁾	4.580	262154
AT-MATH8/63SSD-1000 ⁽¹⁾	4.756	262155

For double collectors


Type	Weight kg	Order No.
AT-MATHD6/63-100HSC-1000 ⁽¹⁾	5.108	262159
AT-MATHD7/63-100HSC-1000 ⁽¹⁾	5.284	262160
AT-MATHD8/63-100HSC-1000 ⁽¹⁾	5.460	262161
AT-MATHD6/140-160HSC-1000	5.138	262162
AT-MATHD7/140-160HSC-1000	5.314	262163
AT-MATHD8/140-160HSC-1000	5.490	262164
AT-MATHD6/200HSC-1000	5.352	262168
AT-MATHD7/200HSC-1000	5.528	262169
AT-MATHD8/200HSC-1000	5.704	262170
AT-MATHD6/63SSD-1000 ⁽¹⁾	5.116	262165
AT-MATHD7/63SSD-1000 ⁽¹⁾	5.291	262166
AT-MATHD8/63SSD-1000 ⁽¹⁾	5.468	262167

(1) Also suitable for former version with 40A

MAINTENANCE SECTIONS

MKHS

For maintenance work with MKH systems, **collector removal and conductor bar replacement** can be easily and quickly achieved with a maintenance section. Maintenance sections conveniently drop out or reinstall at existing runway installations. To obtain best possible accessibility at longer runways we recommend installing several maintenance sections at convenient intervals or locations.

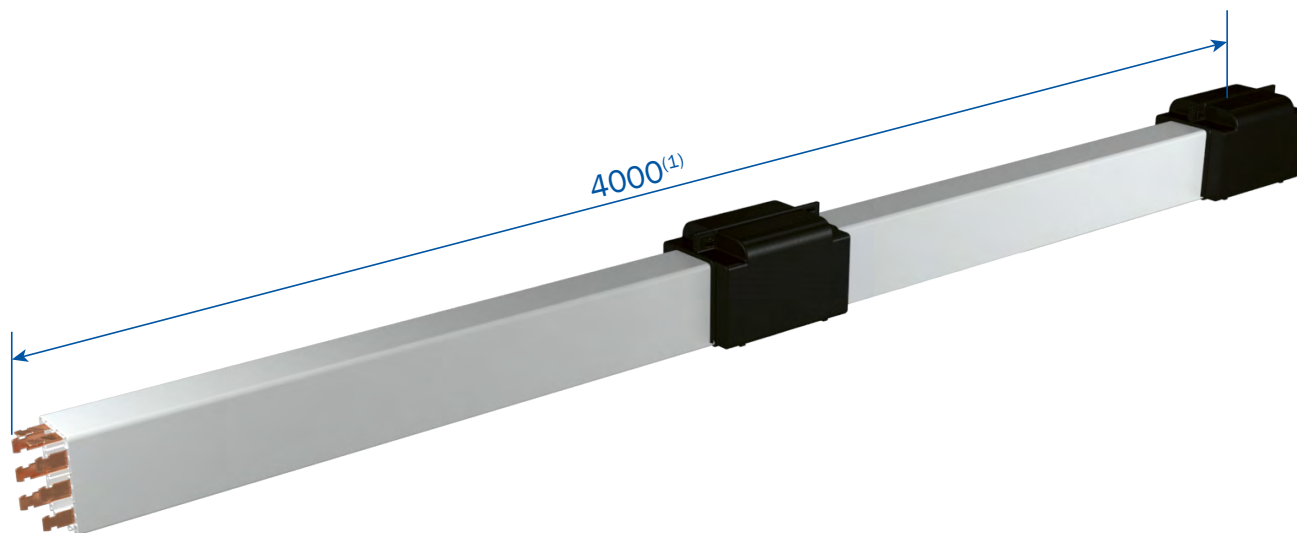

For single collectors

Type	Weight kg	Order No.
RVT-MRT6/63-4000HSC	7.104	263265
RVT-MRT7/63-4000HSC	7.539	263266
RVT-MRT8/63-4000HSC	7.974	263267
RVT-MRT6/80-4000HSC	8.032	263268
RVT-MRT7/80-4000HSC	8.467	263269
RVT-MRT8/80-4000HSC	8.902	263270
RVT-MRT6/100-4000HSC	9.339	263014
RVT-MRT7/100-4000HSC	9.774	263015
RVT-MRT8/100-4000HSC	10.209	263016
RVT-MRT6/140-4000HSC	10.047	263017
RVT-MRT7/140-4000HSC	10.482	263018
RVT-MRT8/140-4000HSC	10.917	263019
RVT-MRT6/160-4000HSC	11.019	263020
RVT-MRT7/160-4000HSC	11.454	263021
RVT-MRT8/160-4000HSC	11.889	263022
RVT-MRT6/200-4000HSC	12.003	263023
RVT-MRT7/200-4000HSC	12.430	263024
RVT-MRT8/200-4000HSC	12.873	263025
RVT-MRT6/63-4000SSD	7.104	263275
RVT-MRT7/63-4000SSD	7.539	263276
RVT-MRT8/63-4000SSD	7.974	263277

(1) Standard length = 4000 mm; any other length and maintenance sections in curves on request ($R_{\min} = 1000 \text{ mm}$ / $L_{\min} = 1000 \text{ mm}$).


CONDUCTOR DEAD SECTIONS

MKHF/MKHS/MKHD

Conductor dead section - for sectioning and repair zones

Please advise us which conductors should be disconnected. The Earth/Ground conductor is usually not disconnected for safety reasons.

The dead section comes factory assembled on a section..

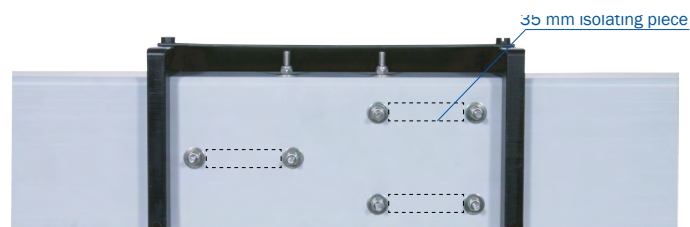

5 mm air gap

Type ⁽¹⁾	Weight kg	Order No.
ST-MHTL1 ...	0.238	262578
ST-MHTL2 ...	0.246	262579
ST-MHTL3 ...	0.254	262580
ST-MHTL4 ...	0.262	262581
ST-MHTL5 ...	0.270	262582
ST-MHTL6 ...	0.278	262583
ST-MHTL7 ...	0.286	262584
ST-MHTL8 ...	0.294	262585

35 mm isolating piece

Type ⁽¹⁾	Weight kg	Order No.
ST-MHTI1 ...	0.274	262586
ST-MHTI2 ...	0.294	262587
ST-MHTI3 ...	0.309	262588
ST-MHTI4 ...	0.324	262589
ST-MHTI5 ...	0.339	262590
ST-MHTI6 ...	0.354	262591
ST-MHTI7 ...	0.369	262592
ST-MHTI8 ...	0.384	262593
ST-MHTI9 ...	0.387	262594
ST-MHTI10 ...	0.390	262595

Please advise us which conductors should be disconnected (see pages 24 and 25). The dead section comes factory assembled.

(1) Complete types e.g. ST-MHTI4HS-L1/L2/L3/2-MSWA for a 35 mm isolation piece with separation of conductors L1, L2, L3 and 2 for the current collector MSWA → Order No.: 262589

ANTI-CONDENSATION SECTIONS


MKHF/MKHS/MKHD

The anti-condensation section consists of 1 m conductor with air circulation holes, covered by a protection hood. The anti-condensation section doesn't separate the conductor.

Use of the anti-condensation section

At transition areas where the system transitions from indoor to outdoor.

Thereby an icing of the outside conductor will be avoided, as the warm air leaks out of the anticondensation section and will not condensate in the housing (see sketch).

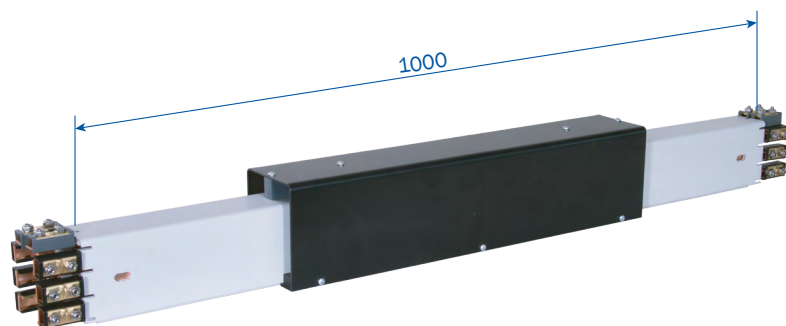

Feed


No extra feeds required as the Power rail is not interrupted.

Collectors

No extra collectors required.

Installation

The anti-condensation section is to be placed outdoors

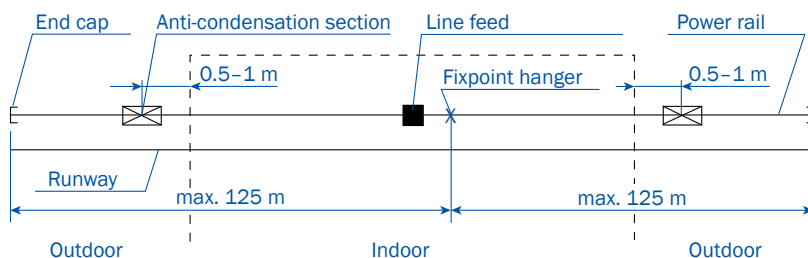

For MKHF / MKHS

Type	Weight kg	Order No.
BT-MBHS6/63-100HSC-1000 ⁽¹⁾	4.678	262135
BT-MBHS7/63-100HSC-1000 ⁽¹⁾	4.854	262136
BT-MBHS8/63-100HSC-1000 ⁽¹⁾	5.030	262137
BT-MBHS6/140-160HSC-1000	4.708	262138
BT-MBHS7/140-160HSC-1000	4.884	262139
BT-MBHS8/140-160HSC-1000	5.060	262140
BT-MBHS6/200HSC-1000	4.954	262144
BT-MBHS7/200HSC-1000	5.130	262145
BT-MBHS8/200HSC-1000	5.306	262146
BT-MBHS6/63SSD-1000 ⁽¹⁾	4.730	262141
BT-MBHS7/63SSD-1000 ⁽¹⁾	4.906	262142
BT-MBHS8/63SSD-1000 ⁽¹⁾	5.082	262143

For MKHD

Type	Weight kg	Order No.
BT-MBHD6-10HSC-1000	2.081	262570
BT-MBHD6-10SSD-1000	2.081	262571

(1) Also suitable for former version with 40A

EXPANSION SECTIONS

MKHF/MKHS

The expansion sections are required to compensate for the different expansions between copper conductors and steel- or concrete structures, in varying temperatures without interrupting electrical power: Expansion joints are used when the Power rail length between feeds, curves, switches or other fix points is exceeding 20 m.


Max. length during differences in temperature:

Δt 90 °C (–30 °C bis +60 °C) one expansion joint per 100 m.

An additional expansion joint every 100 m.

Arrangement of fixpoints according to sketches.



The remaining conductor sections have to be installed with sliding hangers.

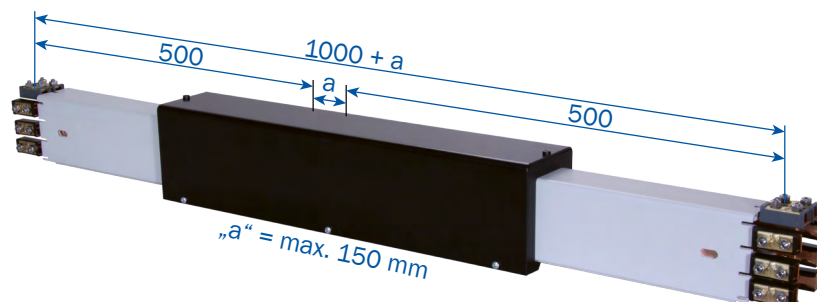

Assembly

The gap dimension „a“ is 75 mm during installation.
Valid for an ambient temperature of –10 °C to +35 °C during installation.

Additional feeds or current collectors are not required as the expansion-sections do not interrupt electrical power.

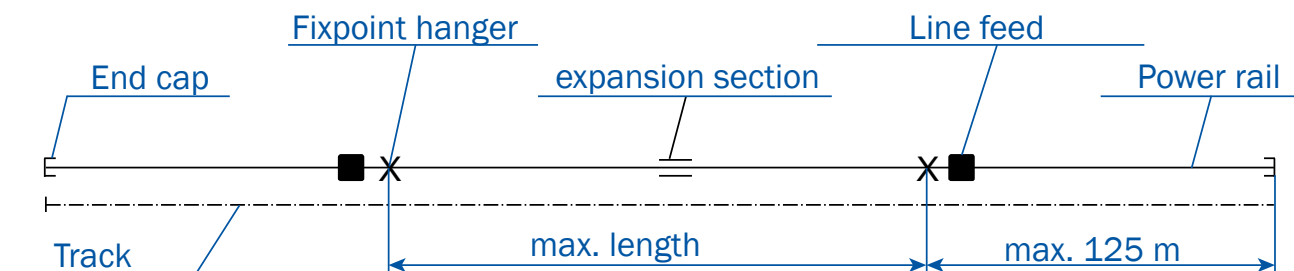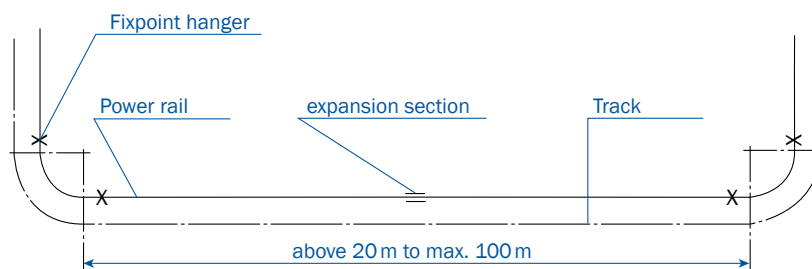

Type	Weight kg	Order No.
DT-MDHS6/63-100HSC-1000 ⁽¹⁾	6.354	262004
DT-MDHS7/63-100HSC-1000 ⁽¹⁾	6.619	262005
DT-MDHS8/63-100HSC-1000 ⁽¹⁾	6.884	262006
DT-MDHS6/140-160HSC-1000	6.384	262007
DT-MDHS7/140-160HSC-1000	6.649	262008
DT-MDHS8/140-160HSC-1000	6.914	262009
DT-MDHS6/200HSC-1000	6.564	262013
DT-MDHS7/200HSC-1000	6.829	262014
DT-MDHS8/200HSC-1000	7.094	262015
DT-MDHS6/63SSD-1000 ⁽¹⁾	6.368	262010
DT-MDHS7/63SSD-1000 ⁽¹⁾	6.633	262011
DT-MDHS8/63SSD-1000 ⁽¹⁾	6.898	262012

(1) Also suitable for former version with 40 A

EXPANSION SECTIONS

MKHD

Expansion sections are required to compensate for the different expansions between copper conductors and steel- or concrete structures, in varying temperatures without interrupting electrical power: Expansion joints are used when the Power rail length between feeds, curves, switches or other fix points is exceeding 10 m.

Max. length during differences in temperature:



$\Delta t 20^{\circ}\text{C} = 70 \text{ m}$ $\Delta t 40^{\circ}\text{C} = 35 \text{ m}$ $\Delta t 80^{\circ}\text{C} = 17 \text{ m}$

$\Delta t 30^{\circ}\text{C} = 45 \text{ m}$ $\Delta t 60^{\circ}\text{C} = 23 \text{ m}$

Longer runs or higher differences in temperature require more expansion joints.

X = max. 55 m for outdoor systems

X = max. 100 m for indoor systems

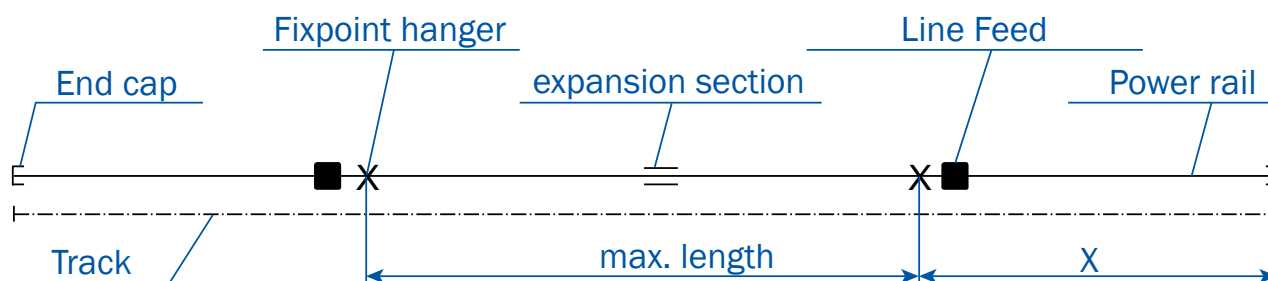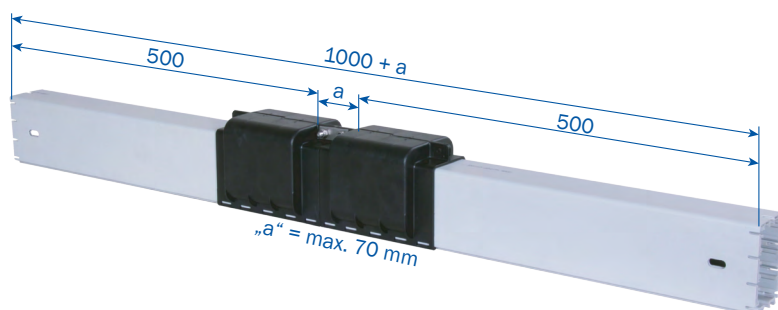

Type	Weight kg	Order No.
DT-MDHD6-8HSC-1000	1.424	262572
DT-MDHD9HSC-1000	1.418	262573
DT-MDHD10HSC-1000	1.412	262574
DT-MDHD6-8SSD-1000	1.424	262575
DT-MDHD9SSD-1000	1.418	262576
DT-MDHD10SSD-1000	1.412	262577

SINGLE COLLECTORS

MKHF/MKHS/MKHD

Single collector MSWA

up to max. 180 m/min.

In conductor rails with sealing strip up to 100 m/min.

Connecting cables

for power line: cable 1 → 4 x 6 mm²

cable 2 → ... x 1.5 mm²

for control line: cable 1 → ... x 2.5 mm²

(two cables for 8-pole and more)

Example of ordering double collectors with 2 m cable


Order No. 236177-2

for collector SA-MSWA6/50-2HS28-60

Cleaning trolleys on request

For curves use single collectors only.

Connecting cable 1 m, longer cable available.

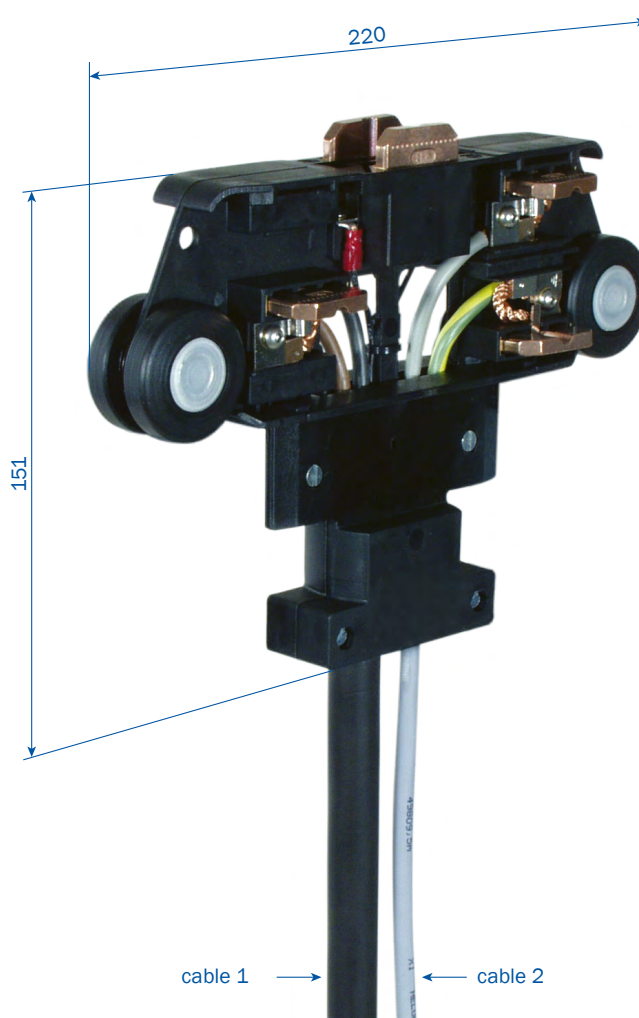

Type	Weight kg	No of Poles	Power rating at 60 % ED in A	Ø of connecting-cables in mm		Order No.
				Cable 1	Cable 2	
SA-MSWA6/50-1HS28-60	1.254	6	50	≈ 17.0	≈ 7.0	236177
SA-MSWA7/50-1HS28-60	1.307	7	50	≈ 17.0	≈ 7.5	236178
SA-MSWA8/50-1HS28-60	1.369	8	50	≈ 17.0	≈ 8.0	236179
SA-MSWA9/50-1HS28-60	1.484	9	50	≈ 17.0	≈ 9.0	236180
SA-MSWA10/50-1HS28-60	1.592	10	50	≈ 17.0	≈ 9.5	236181
SA-MSWA6/25-1SS28-60	0.922	6	25	≈ 11.5	-	236182
SA-MSWA7/25-1SS28-60	0.958	7	25	≈ 11.5	-	236183
SA-MSWA8/25-1SS28-60	1.030	8	25	≈ 10.0	≈ 10.0	236184
SA-MSWA9/25-1SS28-60	1.158	9	25	≈ 11.0	≈ 10.0	236185
SA-MSWA10/25-1SS28-60	1.347	10	25	≈ 11.5	≈ 10.0	236186

SINGLE COLLECTORS

MKHF/MKHS/MKHD

Single collector MSWAS

up to max. 250 m/min.

In conductor rails with sealing strip up to 100 m/min.

Connecting cables

for power line: cable 1 → 4 x 6 mm²
cable 2 → ... x 1.5 mm²

for control line: cable 1 → ... x 2.5 mm²
(two cables for 8-pole and more)


Example of ordering collector with 2 m cable

Order No. 236200-2

for collector SA-MSWAS6/50-2HS28-60

For curves use single collectors only.

Connecting cable 1 m, longer cable available.

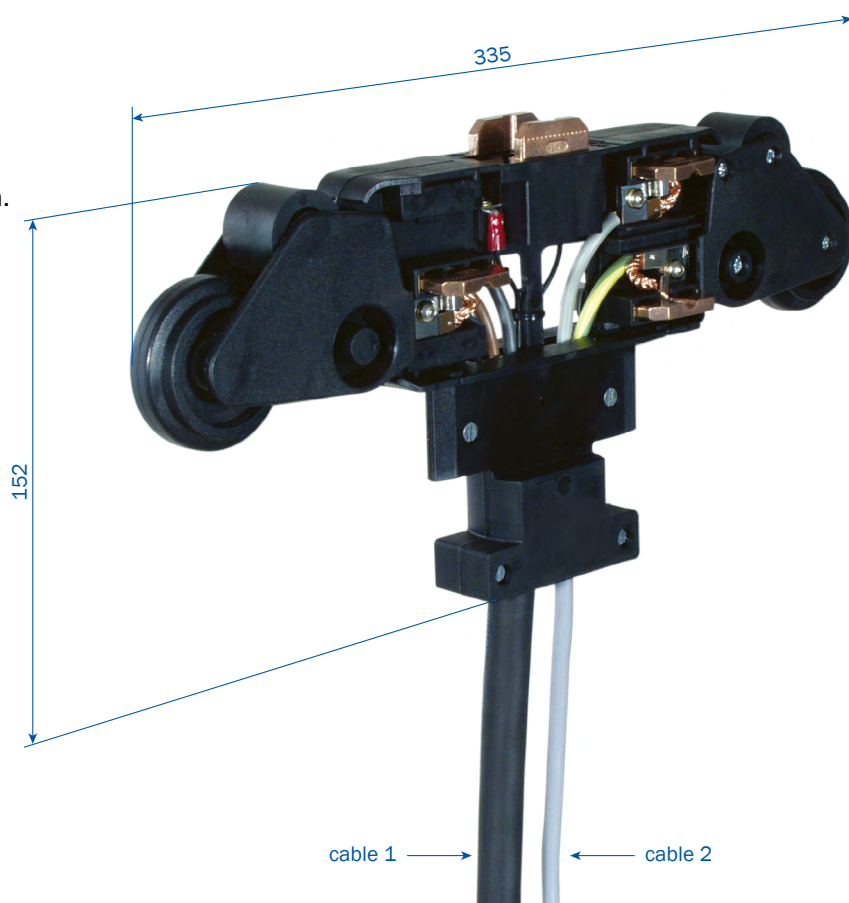

Type	Weight kg	No of Poles	Power rating at 60 % ED in A	Ø of connecting-cables in mm		Order No.
				cables 1	cables 2	
SA-MSWAS6/50-1HS28-60	1.354	6	50	≈ 17.0	≈ 7.0	236200
SA-MSWAS7/50-1HS28-60	1.407	7	50	≈ 17.0	≈ 7.5	236201
SA-MSWAS8/50-1HS28-60	1.469	8	50	≈ 17.0	≈ 8.0	236202
SA-MSWAS9/50-1HS28-60	1.584	9	50	≈ 17.0	≈ 9.0	236203
SA-MSWAS10/50-1HS28-60	1.692	10	50	≈ 17.0	≈ 9.5	236204
SA-MSWAS6/25-1SS28-60	1.022	6	25	≈ 11.5	-	236205
SA-MSWAS7/25-1SS28-60	1.058	7	25	≈ 11.5	-	236206
SA-MSWAS8/25-1SS28-60	1.130	8	25	≈ 10.0	≈ 10.0	236207
SA-MSWAS9/25-1SS28-60	1.258	9	25	≈ 11.0	≈ 10.0	236208
SA-MSWAS10/25-1SS28-60	1.447	10	25	≈ 11.5	≈ 10.0	236209

DOUBLE (TANDEM) COLLECTORS

MKHF/MKHS/MKHD

Double collector DMSWA

up to max. 180 m/min.

In conductor rails with sealing strip up to 100 m/min.

Connecting cables

for power line: cable 1 → 4 x 6 mm²
cable 2 → ... x 1.5 mm²


for control line: cable 1 → ... x 2.5 mm²
(two cables for 8-pole and more)

Example of ordering collector with 2 m cable

Order No. 236315-2

for collector SA-DMSWA6/100S-2HS28-60

For curves use single collectors only.

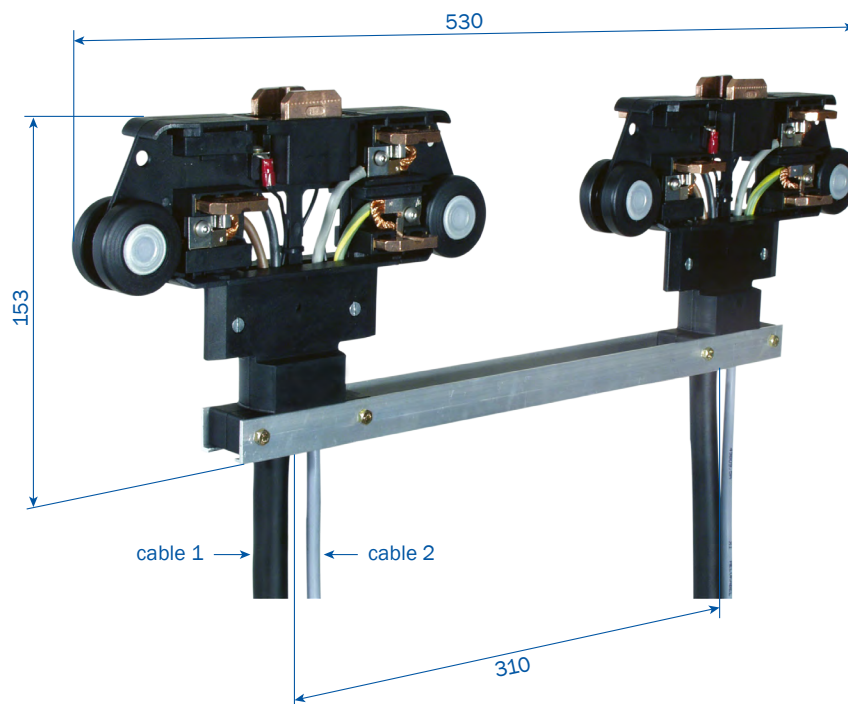

Type	Weight kg	No of Poles	Power rating at 60 % ED in A	Ø of connecting-cables in mm		Order No.
				cable 1	cable 2	
SA-DMSWA6/100S-1HS28-60	2.670	6	100	≈ 17.0	≈ 7.0	236315
SA-DMSWA7/100S-1HS28-60	2.776	7	100	≈ 17.0	≈ 7.5	236316
SA-DMSWA8/100S-1HS28-60	2.900	8	100	≈ 17.0	≈ 8.0	236317
SA-DMSWA9/100S-1HS28-60	3.130	9	100	≈ 17.0	≈ 9.0	236318
SA-DMSWA10/100S-1HS28-60	3.346	10	100	≈ 17.0	≈ 9.5	236319
SA-DMSWA6/50S-1SS28-60	2.006	6	50	≈ 11.5	-	236320
SA-DMSWA7/50S-1SS28-60	2.078	7	50	≈ 11.5	-	236321
SA-DMSWA8/50S-1SS28-60	2.222	8	50	≈ 10.0	≈ 10.0	236322
SA-DMSWA9/50S-1SS28-60	2.478	9	50	≈ 11.0	≈ 10.0	236323
SA-DMSWA10/50S-1SS28-60	2.856	10	50	≈ 11.5	≈ 10.0	236324


TOW ARMS

MKHF/MKHS/MKHD

Tow arm

Installation options of 30 mm square-, hollow profile or tube with 30 – 34 mm


Type	Weight kg	Order No.
MN-MGUN	0.436	600887
MN-MGU/K ⁽³⁾	0.550	600336

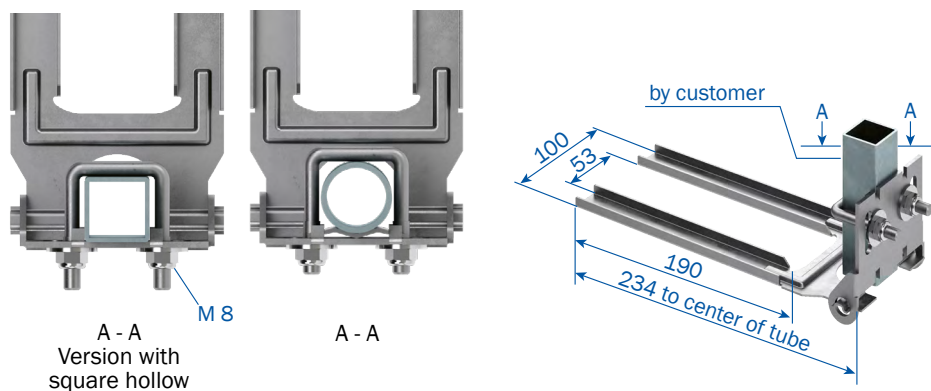

Tow arm

for mounting on plane surface

Type	Weight kg	Order No.
MN-MGFN	0.328	600888
MN-MGF/K ⁽²⁾	0.442	600337

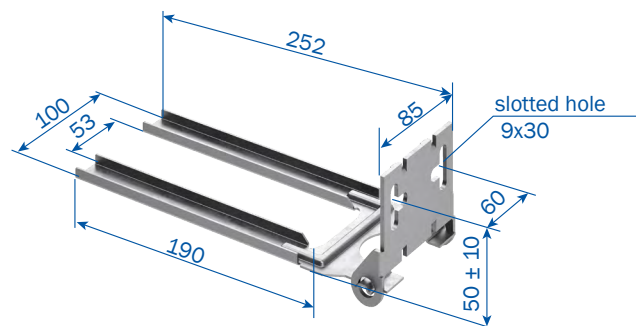


Flexible tow arm

For single collectors
for systems with transfer funnels MTH


If you are going to use the flexible towing arm in system with curves please contact us.

Type	Weight kg	Order No.
MN-MFMN	1.021	236460

max. horizontal offset 15 mm
max. vertical offset 10 mm

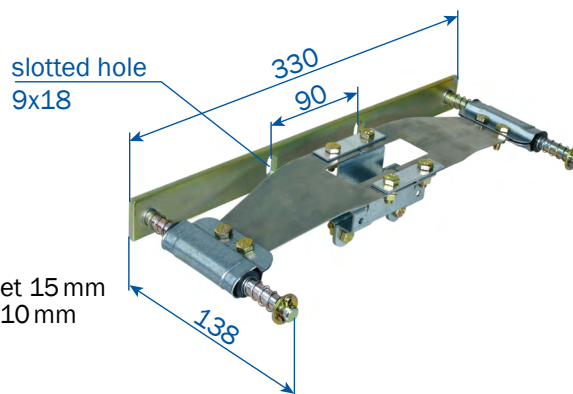

Flexible tow arm configuration

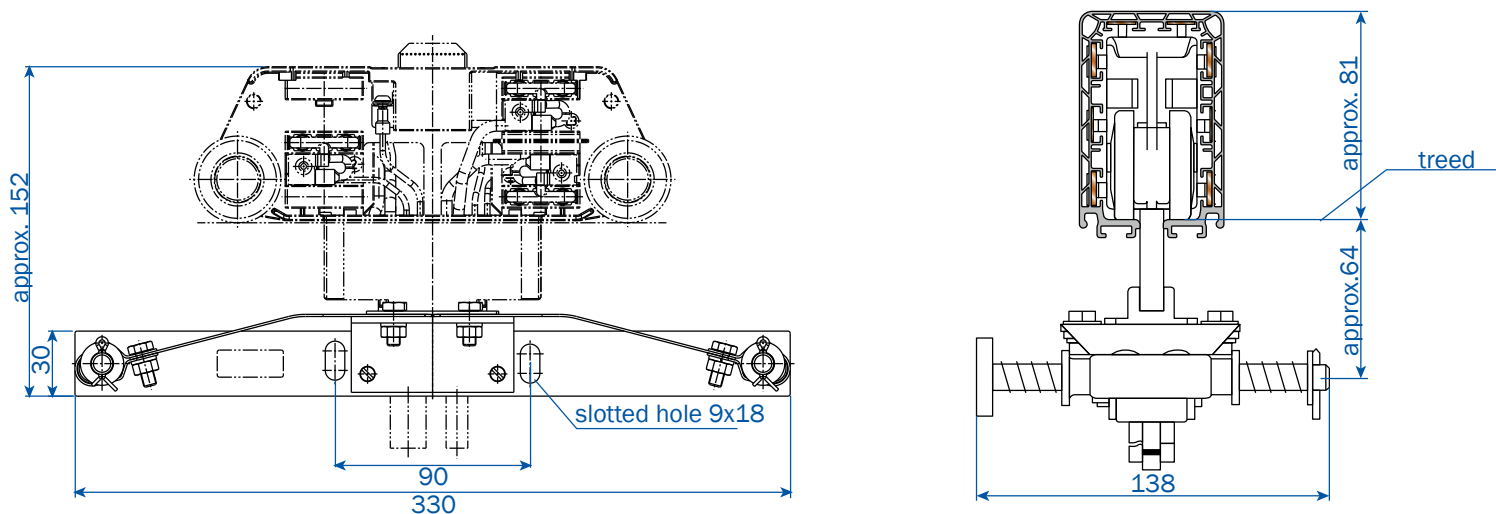


(1) For assembly use enclosed adapter plate (Prisma).
(2)... / K Stainless steel

FLAT COPPER AND CABLE GLANDS

MKHF/MKHS/MKHD

Flat continuous copper conductors (MKHD)

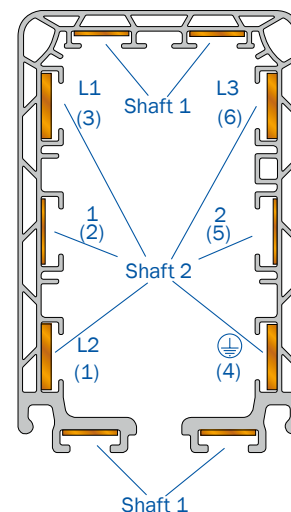

Max. length in meters of 11 mm wide strip (for shaft 1)

Type	Description	Weight kg/m	Type of cassette (A,B,C) meters of copper strip			Order No. (Cu)	Order No. (Inox)
			A	B	C		
SS-FLCU40A/11-11X1-E	11 mm ² 11 x 1 mm (40 A)	0.10	90	260	300	234198	-
SS-INOX40A/11-11X1-E	11 mm ² 11 x 1 mm	0.09	90	260	300	-	234384

Max. length in meters of 13 mm wide strips (for shaft 2)

Type	Description	Weight kg/m	Type of cassette (A,B,C) meters of copper strip			Order No. (Cu)	Order No. (Inox)
			A	B	C		
SS-FLCU63A/10-13X0,8-E	10 mm ² 13 x 0.8 mm (63 A)	0.09	115	300	-	234197	-
SS-FLCU80A/17-13X1,3-E	17 mm ² 13 x 1.3 mm (80 A)	0.15	65	200	300	234199	-
SS-INOX40A/17-13X1,3-E	17 mm ² 13 x 1.3 mm	0.14	65	200	300	-	234383
SS-FLCU100A/26-13X2-E	26 mm ² 13 x 2 mm (100 A) ⁽²⁾	0.23	45	130	200	234200	-
SS-FLCU140A/33-13X2,5-E	33 mm ² 13 x 2.5 mm (140 A) ⁽²⁾	0.29	35	100	160	234201	-
SS-FLCU160A/42-13X3,2-E	42 mm ² 13 x 3.2 mm (160 A) ⁽²⁾	0.37	25	80 ⁽¹⁾	120 ⁽¹⁾	234202	-

Cable glands

Cable glands	for cable-Ø in mm	Capacity in A (execution: D / F / S)	Page
M 25 and M 40	11 – 17 and 19 – 28	63 – 80 HS	P. 12, 13
M 25	11 – 17	63 SS	P. 12, 13
M 25 and M 50	9 – 19 and 23 – 34	63 – 100 HS	P. 13, 14
M 25 and M 50	9 – 19 and 29 – 40	163 – 200 HS	P. 13, 14
M 25	9 – 19	63 SS	P. 13, 14
M 25 for L1/L2/L3	9 – 19	63 – 200 HS	P. 15, 16
M 25 for 1 – 4 and 9/10	6 – 15	63 – 200 HS	P. 15, 16
M 25 6 to 10 poles	9 – 19	63 SS	P. 15, 16
M 20	6 – 13	63 – 200 SS / HS	P. 15, 16, 18

(1) Values for installation through VAHLE-engineers (with help device possible). Use bolted joints and possibly expansion sections for bigger lengths than shown in the table. In this case installation by VAHLE experts is recommended, especially for copper cross section of 42 mm². Consult factory for proper layout.

(2) With straightening tool (see page 34).


ASSEMBLING TOOLS

MKHF/MKHS/MKHD

Copper cassettes (weight without copper)

Type	Weight kg	Dim "X"	Dim "Y"	Type of cassette	Order No.
MZ-EZK1-MKL/H	2.364	462	500	A	234219
MZ-EZK2-MKL/H	3.890	662	700	B	234220
MZ-EZK3-MKL/H	5.648	862	900	C	234250
MZ-DEZK1-MKL/H	4.831	462	500	A	234221
MZ-DEZK2-MKL/H	7.883	662	700	B	234222
MZ-DEZK3-MKL/H	11.387	862	900	C	234251

Type of copper cassette depends on copper cross section and system length (see page 32)



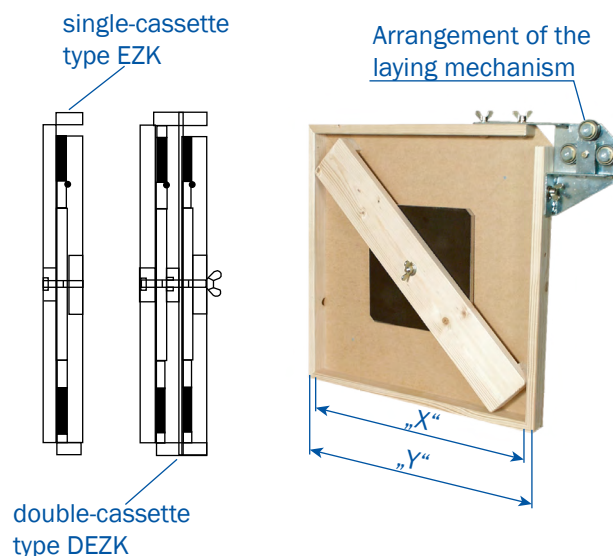


Straightening tool

required for copper strip cross sections 26 mm² Cu. upwards

Type	Weight kg	Order No.
MZ-RV-MKL/H	0.952	234218

Conductor threading tool

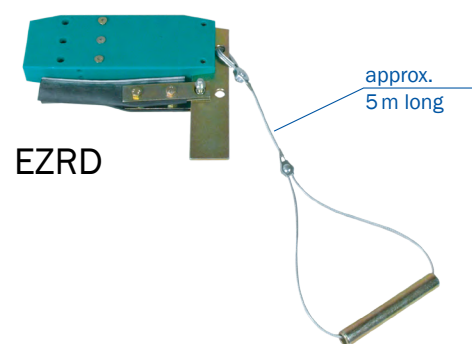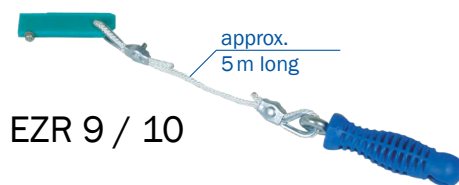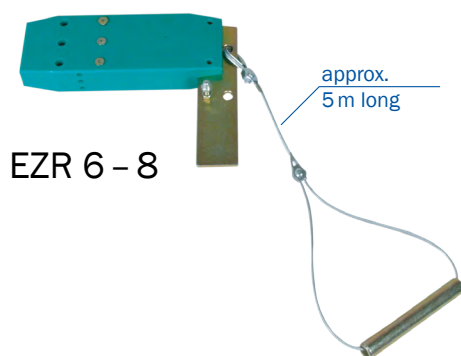

Type	Weight kg	Description	Order No.
MZ-EZR6-8-MKL/H	0.991	(for conductors inside housing, shafts 1 und 2)	234204
MZ-EZR9/10-MKL/H	0.182	(for conductors outside housing, shafts 1)	234730
DL-EZRD-MKL/H	1.197	(for sealing strip and for conductors inside housing 1 and 2)	234552

EXAMPLE FOR ORDERING

Try **VAHLE CUSTOMER HUB** for calculation,
quoting and ordering! Request access today!




MKHF/MKHS/MKHD

MKH ... 8/100 ... HSC (see pages 5 and 6)

X = 300 mm end section for copper conductor MKHD (w/o cond.)

<https://customerhub.vahle.de/>

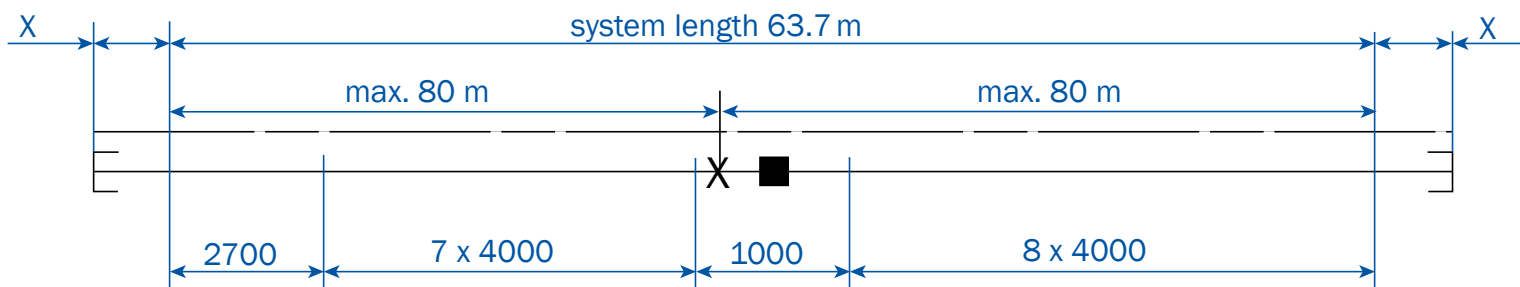

Quantity	Type	MKHD continuous copper		MKHF spring joints		MKHS bolted joints	
		Type	Order No.	Type	Order No.	Type	Order No.
15	Profile section, 4 m	MKHD-4000HSC	262504	-	-	-	-
1	Profile section, 3 m for 2.7 m short length	MKHD-3000HSC	262503	-	-	-	-
15	Conductor system 4 m	-	-	MKH 8/100-4000HSC	262134	MKHS8/100-4000HSC	262344
1	Conductor system 3 m for 2.7 m short length	-	-	MKH 8/100-3000HSC	262133	MKHS8/100-3000HSC	262343
1	Line feed	ES-MHG 8/63-100HSC-1000	262547	ES-MHGF8/100HSC-1000	262500	ES-MHGS6/100HSC-1000	262456
1	End section, left 0.3 m long	EK-MHED/L	262537	-	-	-	-
1	End section, right, 0.3 m long	EK-MHED/R	262536	-	-	-	-
2	End cap	-	-	EK-MSES	235141	EK-MSES	235141
18	Joint caps	VM-MVMD	234678	-	-	-	-
16	Joint caps	-	-	VM-MVMS	234585	VM-MVMS	234585
1	Fixpoint hanger	AH-MFH	262001	AH-MFH	262001	AH-MFH	262001
32	Sliding hangers	AH-MGH	262000	AH-MGH	262000	AH-MGH	262000
260 m	Flat copper strip 4 coils à 65 m, 26 mm ²	SS-FLCU100A/26-13X2-E	234200	-	-	-	-
130 m	Flat copper strip 2 coils à 65 m, 10 mm ²	SS-FLCU40A/10-13X0,8-E	234197	-	-	-	-
130 m	Flat copper strip 2 coils à 65 m, 11 mm ²	SS-FLCU40A/11-11X1-E	234198	-	-	-	-
1	Single collector	SA-MSWA8/50-1HS28-60	236179	SA-MSWA8/50-1HS28-60	236179	SA-MSWA8/50-1HS28-60	236179
1	Tow arm	MN-MGU	600334	MN-MGU	600334	MN-MGU	600334
1	Copper cassette	MZ-EZK2-MKL/H	234220	-	-	-	-
1	Laying mechanism	MZ-RV-MKL/H	234218	-	-	-	-
1	Conductor threading tool	MZ-EZR6-8-MKL/H	234204	-	-	-	-

SPARE PARTS

MKHF/MKHS/MKHD

For enclosed conductor system

Type	Description	Order No.
VM-STV11/40A-MKHF	Plug-in joint for MKHF (11 mm Cu; 40 A)	262020
VM-STV13/63-100A-KBHF/MKHF ⁽¹⁾	Plug-in joint for MKHF (13 mm Cu; 63–100 A)	600483
VM-SCHV11/40A-MKHS/MKLS	Bolted joint for MKHS (11 mm Cu; 40 A)	262019
VM-SCHV13/63-200A-KBHS/MKHS/MKLS ⁽¹⁾	Bolted joint for MKHS (13 mm Cu; 63–200 A)	262018
VM-MVMT-MT-MU/S-9/10POL	Joint cap for transfer guide and transfer funnel, pair (MKHD, MKHF and MKHS)	234779
DL-D-KBH-MKH-MKL-TDV	Sealing strip (max. length each 40 m)	600551
DL-V-KSLT-KBH-MKL/H-LSV/G	Coupling for sealing strip, in pairs (2 per joint)	258300
DL-F-MKL/H	Fixing clamp for sealing strip (1 per end)	236105

For current collector MSA, DMSA

Type	Description	Order No.
SK-KSW-MSA-PH/SU-28	Carbon phase (lateral, 9. and 10. pole)	600088
SK-KSW-MSA-PE/S-28	Carbon ground (lateral, PE)	600090
SK-MSA-PH/O-28	Carbon top (7. and 8. pole)	236187
SA-KF-KSW-MSA-SP	Carbon spring standard (for all carbons, pair)	600338
TR-DMSW/A-SF310	Rigid bar for DMSW and DMSA	234515
SA-ZB-AS-MSA-P-250	High speed set for collector MSAS	236199
SA-ZB-DG-MSA-S	Sealing strip slide plate for collectors MSA	236625



Download operation manuals and more at
<https://www.vahle.com/en/download>

(1) Also suitable for former version with 40 A

APOS MAGNETIC POSITIONING SYSTEM

VAHLE APOS positioning systems were developed for automated handling systems in material flow technology.

The control system can constantly query the absolute position of the mobile consumer.

The APOS Positioning system can be used in connection with the VAHLE POWERNET data transmission system (with 2 separate poles).

Features of APOS Magnetic positioning system:

- absolute position determination up to and 262 m
- Systems for exceeded lengths on request
- Space-saving solutions for integration into the power rail system or for installation in parallel to the runway
- retrofittable
- absolute position immediately available when switching on or after a power failure
- reliable position detection even in humid or dusty environments
- trouble-free functionality even in poor lighting conditions
- travel speed up to 250 m/min
- no wear (contactless)



Mechanical data

Dimensions..... 245 x 55 x 26 mm

Reading distance 4 mm $\pm$ 1 mm

Connection length 5 m

Electrical data

Protection class..... IP54



(special version with IP67 available)

Voltage 10...30 VDC

Interfaces..... RS485 und SSI

Temperature -20 °C...+65 °C


Accuracy..... $\pm$ 1 mm

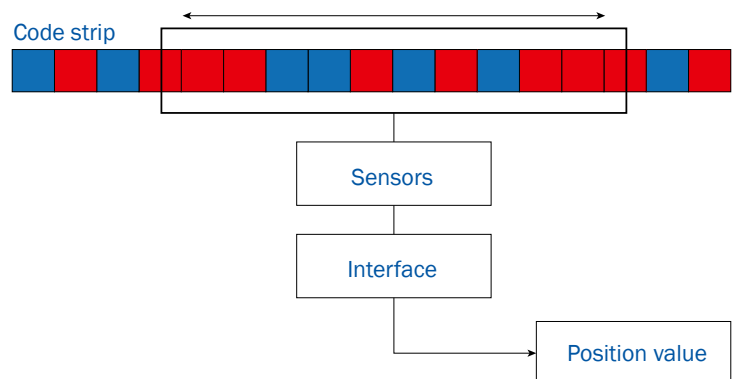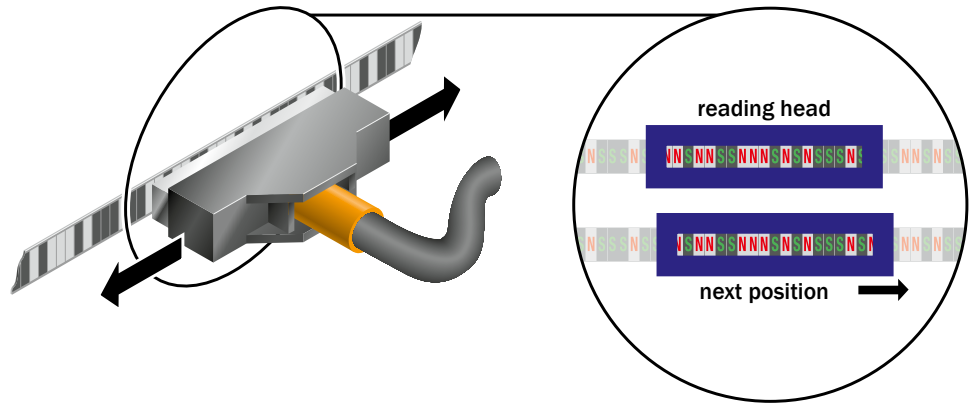

Download operation manuals and more at
<https://www.vahle.com/en/download>

VAHLE POWERNET (ETHERNET/IP OVER CONDUCTOR SYSTEM)

VAHLE POWERNET - Data transmission systems in conjunction with VAHLE conductor bars or sliprings were developed for automated handling systems in material flow technology. They enable the uninterrupted and cost effective data transfer between the central control system and the accompanying automation devices on the conveying vehicles.

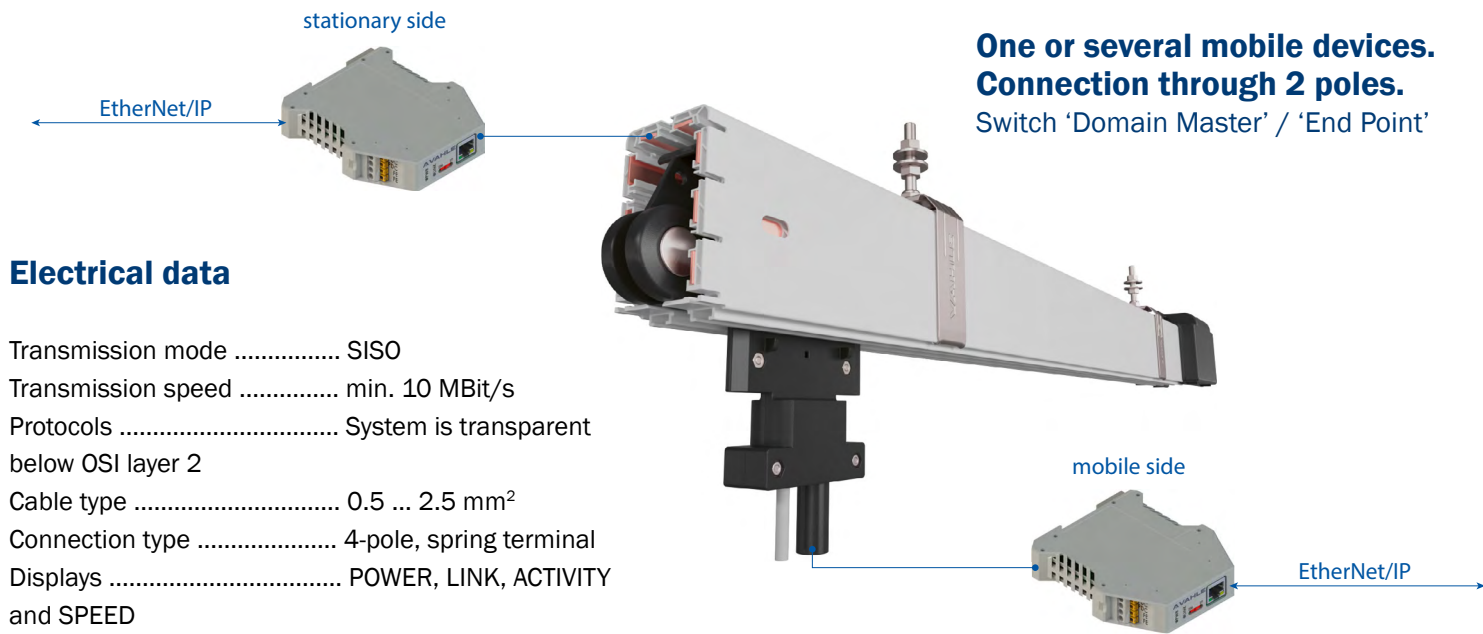

Electrical data


- Transmission mode SISO
- Transmission speed min. 10 MBit/s
- Protocols System is transparent below OSI layer 2
- Cable type 0.5 ... 2.5 mm²
- Connection type 4-pole, spring terminal
- Displays POWER, LINK, ACTIVITY and SPEED
- Supply voltage 24 VDC
- Voltage drop.....±20 %
- Power consumption ≤15 W

Mechanical data

- Housing dimensions 23 x 99 x 100 mm
- Protection class IP20
- Weight 106 g
- Mounting type..... Mounting on top-hat rail (mounting rail 35 x 7.5 mm)

Ambient conditions

- Operating temperature -5 °C ... 55 °C
- Storage temperature -25 °C ... +70 °C

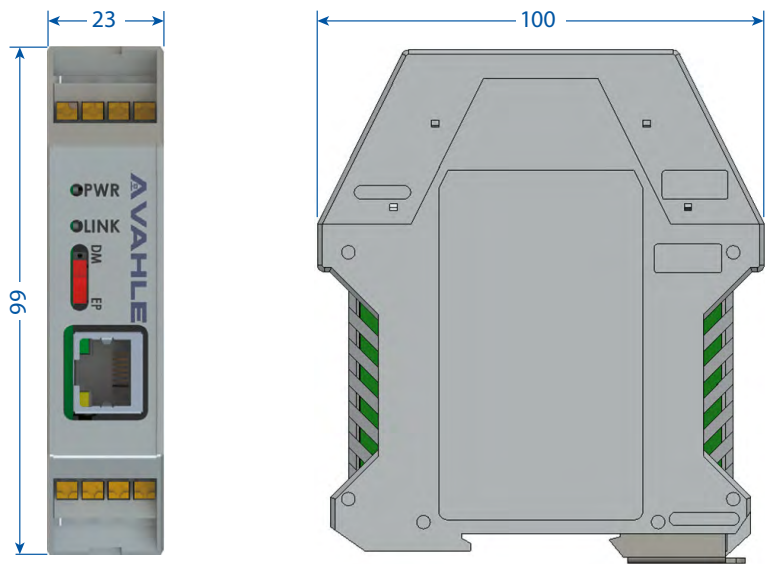

Type	Description	Order No.
PN-PDC-ETHERNET-24V+V	PowerNet module	10035171
RC-220R/100nF-630VDC/250VAC+AL:150MM+V	End termination 220 Ω for MKH conductor system	0910106/00-220

QUESTIONNAIRE

sales.usa@vahle.com, Phone: +1 713.465.9796, Fax: +1 713.465.1851

Please fill out the following questionnaire in order to determine which conductor bar system is right for your application. Copy / print this page, fill out the questionnaire, and send it to your VAHLE experts. For curved tracks, Power rail with isolating sections etc., we require sketches to enable us to prepare a quotation.

Contact Information

Company Name		Contact Person	
Address		Email Address	
State		ZIP	
		Phone Number	

System Information

☐ New Application ☐ Replacement ☐ Add on existing system

Application Type (i.e. cranes) details are helpful: i.e. load 20 tons		Desired Hanger Spacing		m ft
Total System Length		m ft		
Total Number of Conductors		System Layout (Straight / Curved / Loop / Other)		
Will one be a ground conductor?	☐ Yes ☐ No		please provide sketches or drawings when applicable	

Power Requirements

Operating voltage		Volt		Hz	AC/DC	
Total system amperage (example 150A at 40% duty cycle)				Max. voltage drop allowed (typically 3% - 5%)		%
Power Feed(s) Location (end feed, center feed, several feeds)				Duty Cycle % (DC, ED)		%
No. of Cranes / Consumers in the system				Power consumption of each crane		hp, A, kW
Max. Travel Speed		m/min ft/min		Type of motors (usually frequency controlled)		

Environment

Install Location indoor / outdoor / booth	
Ambient Temperature	min. max. °C °F
Interested in VAHLE certified installation?	☐ Yes ☐ No

Additional Comments: dirt, dust, salty air, corrosive, or locations such as water treatment plant, paper mill, etc.
Please specify if you want data communication / positioning.

If detailed motor information is available, please specify below
For the calculation, it is important to consider engines that can operate simultaneously. This helps to calculate and quote the optimal system.

Crane type 1. Information about motors kW, Amperes **or** hp.

	Motor name	Motor power	hp, Amp, kW	Type of Motors
1				
2				
3				

example: Motor 1 main load, motor 2 main travel, motor 3 cross travel


Crane type 2. Information about motors kW, Amperes **or** hp.

	Motor name	Motor power	hp, Amp, kW	Type of Motors
1				
2				
3				

Please send us the form after it is filled out to receive a free quote.

APPLICATION EXAMPLES

Sliding switch

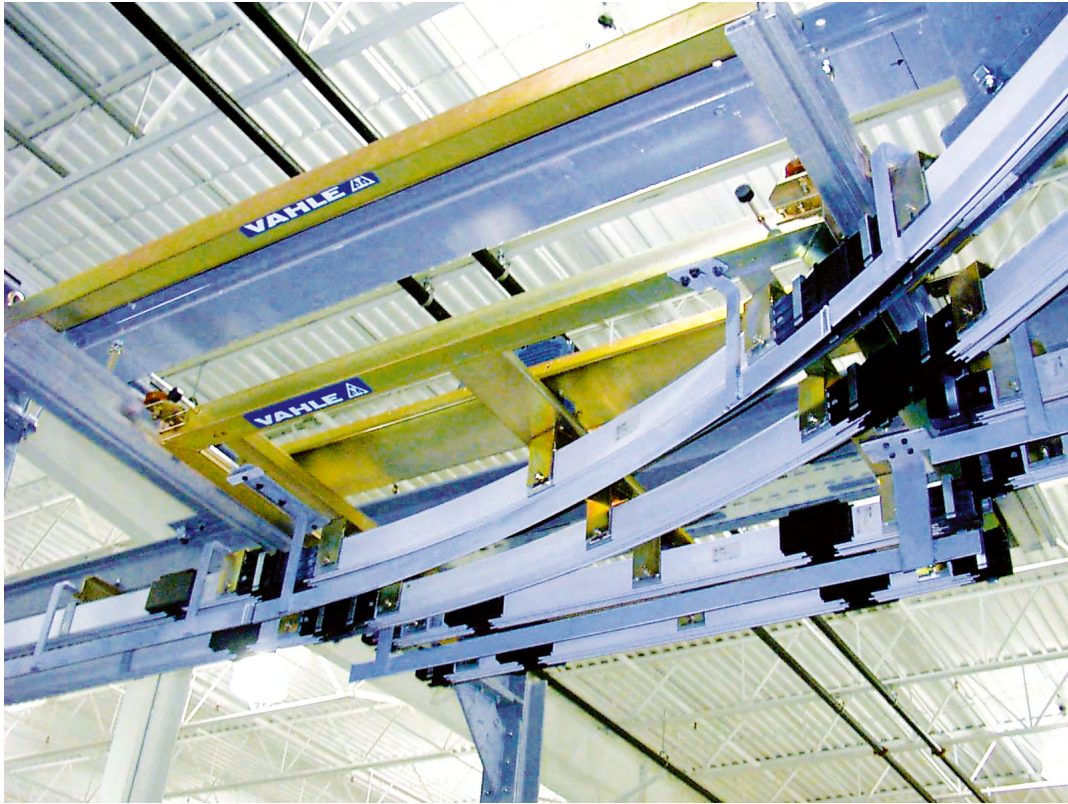

Rail Guided Vehicle





VAHLE, Inc.

**407 Cane Island Parkway
Katy, Texas 77494, USA**

**Phone: +1 713.465.9796
Fax: +1 713.465.1851**

**sales.usa@vahle.com
www.vahle.com**

**You can find your local contact at:
www.vahle.com/contact**